




FliteTop®

STRAIGHT RUNNING CHAIN

2815 SERIES - DOUBLE HINGE

Reference	Standard Materials			
	S	SS-4	P	SS
2815				

Pin Material: Case hardened steel (for carbon steel chains).
Cold rolled austenitic stainless steel (for stainless steel chains).

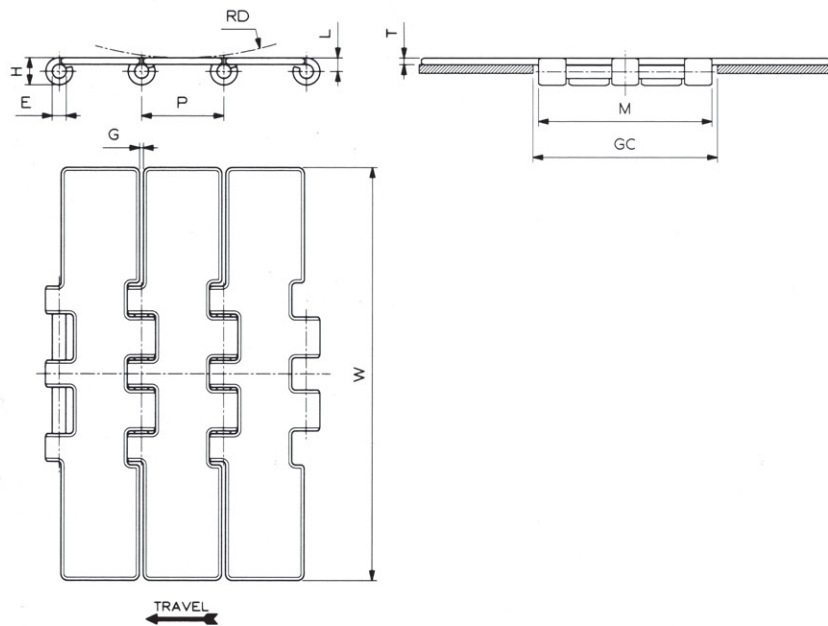

Dimension	mm	Inches
P	38,1	1.5
T	3	.118
M	80	3.15
L	6,4	.252
H	13	.512
E	6,35	.25
RD	150	5.906
GC	82,5	3.248

2815 (Straight Running - Double Hinge)



Chain material
see page 12



Sprockets and Idler
wheels see pages 179-183



Sprocket positioning
see page 299

MATERIAL	REGINA REF.	CHAIN WIDTH W		GAP G		SURFACE FINISH Ra	YIELD LOAD AVERAGE		CHAIN WEIGHT	
		mm	inches	mm	inches		N	lbs	kg/m	lbs/ft
CARBON STEEL (S)	S 2815 K 7 ½	190,5	7.50	1,8	0.071	-	18000	4,050	5,90	3.96
FERRITIC STAINLESS STEEL (SS-4)	SS 2815-4 K 7 ½	190,5	7.50	1,8	0.071	0,3	10300	2,318	5,40	3.62
PRIMA (P)	P 2815 K 7 ½	190,5	7.50	1,8	0.071	0,3	15000	3,375	5,62	3.77
AUSTENITIC STAINLESS STEEL (SS)	SS 2815 K 7 ½	190,5	7.50	1,8	0.071	0,4	10600	2,385	5,40	3.62

Standard length: 3,048 m (10 feet)