



# FliteTop®

## STRAIGHT RUNNING CHAIN


### 915 SERIES - FLIGHT GAP 1,6 mm

- Reduced transversal and longitudinal gap for better product handling.
- 83.8 mm wide chains available: for gap reduction on 85 mm transversal pitch conveyors.
- **XP series: brushed hinges for inliners/inclined combiners**
- **HD: Increased pin hardness for better resistance to chain elongation**



Reference	Standard Materials	
	SS-4	P
915	<input type="checkbox"/>	<input type="checkbox"/>
HD 915	<input type="checkbox"/>	<input type="checkbox"/>

Pin Material: Cold rolled austenitic stainless steel (for 915 series).  
Hardened martensitic stainless steel (for HD 915 series).

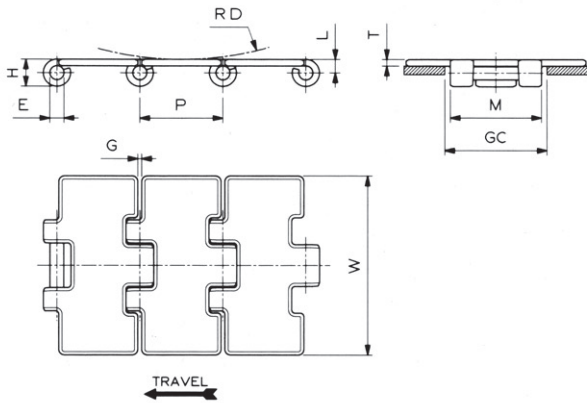

Dimension	mm	inches
P	38,1	1.5
T	3	.118
M	42	1.654
L	6,4	.252
H	13	.512
E	6,35	.25
RD	150	5.906
GC	44	1.732

### 915 (Straight Running - Gap 1,6 mm)



Chain material see page 12



Sprockets and Idler wheels see pages 172-178



Sprocket positioning see page 299

MATERIAL	REGINA REF.	CHAIN WIDTH W		GAP G		SURFACE FINISH Ra	YIELD LOAD AVERAGE		CHAIN WEIGHT	
		mm	inches	mm	inches		N	lbs	kg/m	lbs/ft
FERRITIC STAINLESS STEEL (SS-4)	SS 915-4 K 3 ¼	82,6	3.25	1,6	0.063	0,3	5800	1,305	2,52	1.69
	SS 915-4 K 83,8	83,8	3.30	1,6	0.063	0,3	5800	1,305	2,55	1.71
	SS 915-4 K 4 ½	114,3	4.50	1,6	0.063	0,3	5800	1,305	3,21	2.16
	SS 915-4 K 7 ½	190,5	7.50	1,6	0.063	0,3	5800	1,305	4,87	3.27
PRIMA (P)	P 915 K 3 ¼	82,6	3.25	1,6	0.063	0,3	8500	1,913	2,57	1.73
	P 915 K 83,8	83,8	3.30	1,6	0.063	0,3	8500	1,913	2,60	1.75
	P 915 K 4 ½	114,3	4.50	1,6	0.063	0,3	8500	1,913	3,28	2.20
	P 915 K 7 ½	190,5	7.50	1,6	0.063	0,3	8500	1,913	4,98	3.35
	XP 915 K 3 ¼	82,6	3.25	1,6	0.063	0,2	8500	1,913	2,57	1.73
	XP 915 K 83,8	83,8	3.30	1,6	0.063	0,2	8500	1,913	2,60	1.75

Standard length: 3,048 m (10 feet)



### HD 915 (Straight Running - Gap 1,6 mm Increased Pin Hardness)



Chain material see page 12



Sprockets and Idler wheels see pages 172-178



Sprocket positioning see page 299

MATERIAL	REGINA REF.	CHAIN WIDTH W		GAP G		SURFACE FINISH Ra	YIELD LOAD AVERAGE		CHAIN WEIGHT	
		mm	inches	mm	inches		N	lbs	kg/m	lbs/ft
PRIMA (P)	PHD 915 K 3 ¼	82,6	3.25	1,6	0.063	0,3	8500	1,913	2,57	1.73
	PHD 915 K 83,8	83,8	3.30	1,6	0.063	0,3	8500	1,913	2,60	1.75
	PHD 915 K 4 ½	114,3	4.50	1,6	0.063	0,3	8500	1,913	3,28	2.20
	PHD 915 K 7 ½	190,5	7.50	1,6	0.063	0,3	8500	1,913	4,98	3.35

Standard length: 3,048 m (10 feet)