




FliteTop®

SIDEFLEXING CHAIN

982T SERIES - TAB, REDUCED SIDEFLEXING RADIUS (200 mm)

- Suitable for use with turning discs (Ref. CMA 09 878)

Reference	Standard Materials
982T	SS
Pin Material: Cold rolled austenitic stainless steel.	

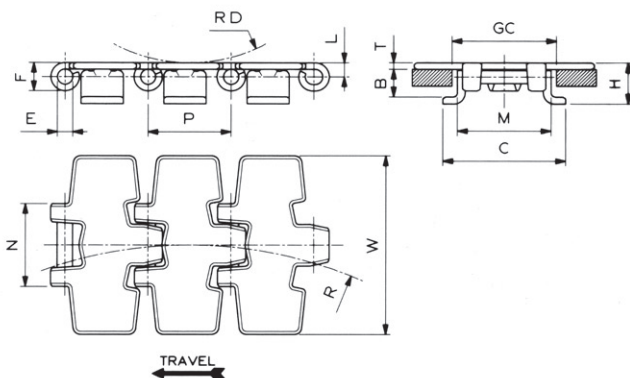

Dimension	mm	inches
P	38,1	1.5
T	3	.118
M	43	1.693
N	38,3	1.508
C	56	2.205
L	6,4	.252
H	19,3	.76
E	6,35	.25
B	12,8	.504
F	13	.512
RD	75	2.953
GC (Straight)	46	1.811
GC (Curve)	44,5	1.752



Chain material
see page 12



Sprockets and Idler
wheels see pages 190-195



Sprocket positioning
see page 299

982T (Sideflexing - Tab - Reduced Sideflexing Radius)

MATERIAL	REGINA REF.	CHAIN WIDTH W		SURFACE FINISH Ra	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		CHAIN WEIGHT	
		mm	inches		mm	inches	N	lbs	kg/m	lbs/ft
AUSTENITIC STAINLESS STEEL (SS)	SS 982T K 3/4	82,6	3.25	0,4	200	7.874	5000	1,125	3,00	2.02

Standard length: 3,048 m (10 feet)