





FliteTop®

STRAIGHT RUNNING CHAIN

821 SERIES - DOUBLE HINGE, REINFORCED

- Top plate thickness 4,8 mm.

Reference	Standard Materials		
	LW	UP	DK
821			
Pin Material: Cold rolled austenitic stainless steel.			on request

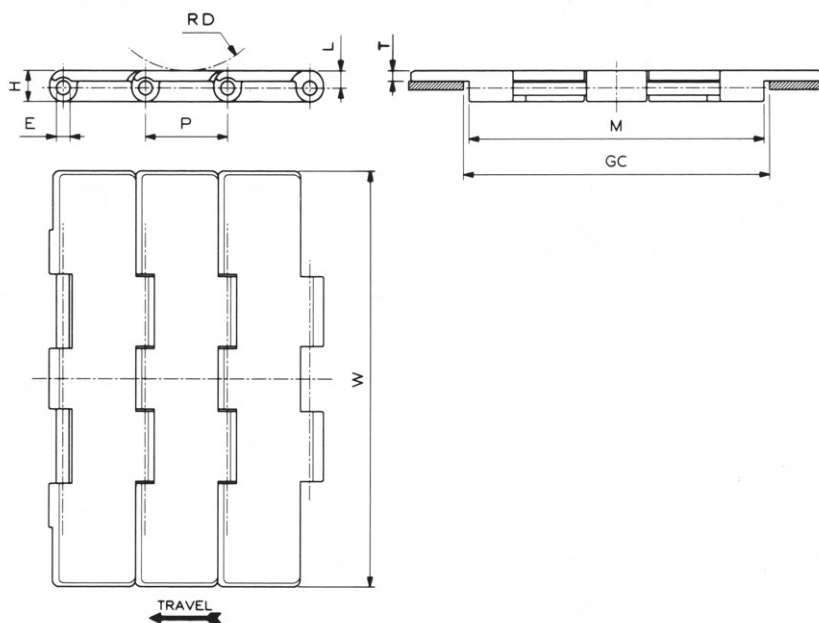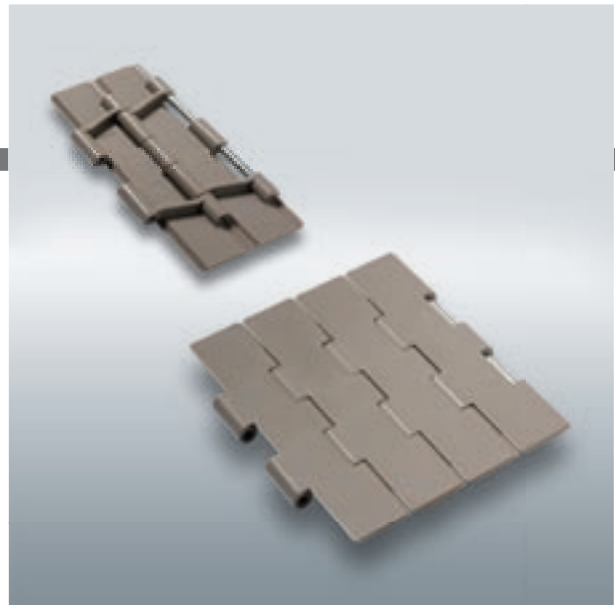

Dimension	mm	inches
P	38,1	1.5
M	136,5	5.374
L	8	.315
H	14,3	.563
E	6,35	.25
RD	40	1.575
GC	140	5.512



Chain material
see page 12



Sprockets and Idler
wheels see pages 200+201



Sprocket positioning
see page 299

821 (Straight Running - Reinforced Top Plate Thickness - Double Hinge)

MATERIAL	REGINA REF.	CHAIN WIDTH W		PLATE THICKNESS T		WORKING LOAD (25°C/77°F)		CHAIN WEIGHT	
		mm	inches	mm	inches	N	lbs	kg/m	lbs/ft
ACETAL RESIN (LW)	LW 821 K 7 ½	190,5	7.50	4,8	0.189	2750	619	2,46	1.65
	LW 821 K 10	254,0	10.00	4,8	0.189	2750	619	2,98	2.00
	LW 821 K 12	304,8	12.00	4,8	0.189	2750	619	3,34	2.24
ULTRA PERFORMANCE ACETAL RESIN (UP)	UP 821 K 7 ½	190,5	7.50	4,8	0.189	2750	619	2,46	1.65
	UP 821 K 10	254,0	10.00	4,8	0.189	2750	619	2,98	2.00
	UP 821 K 12	304,8	12.00	4,8	0.189	2750	619	3,34	2.24

Standard length: 3,048 m (10 feet)