


724e

Conveyor General Catalogue

REGINA CHAIN

PERFORMANCE IN MOTION

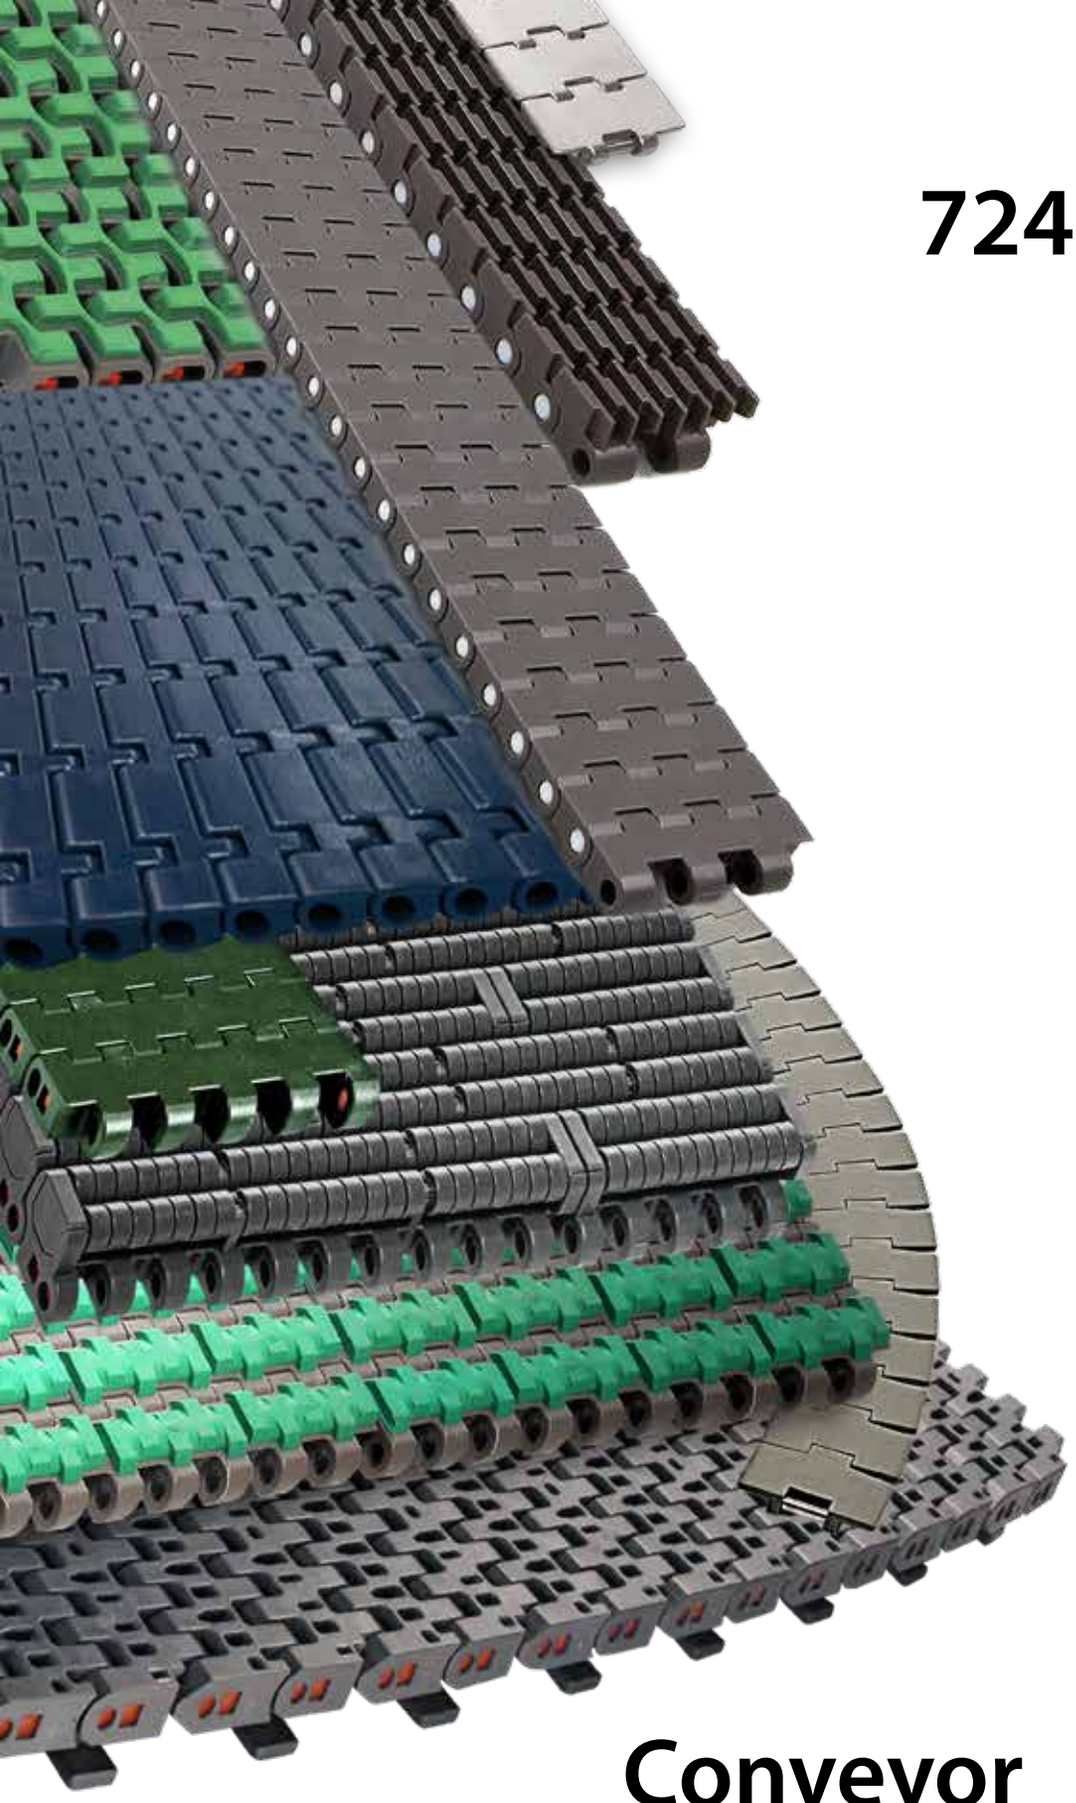













Copyright Regina Catene Calibrate S.p.A. - 2024
All images, products, decorations, texts, signs of this catalog and their graphic layout are exclusive industrial and intellectual property of Regina Catene Calibrate S.p.A.; it is therefore forbidden the reproduction and / or unauthorized use at any title or reason and in any form.
The content of this brochure is only intended to provide general information and of commercial nature, and it may, at any time, be subject to change at the discretion of Regina Catene Calibrate Spa. Despite all the information has been checked for accuracy and completeness, they may contain errors or inaccuracies in some cases, also due to the continuous updating of production. Therefore, Regina Catene Calibrate S.p.A. cannot be held liable for material or immaterial damages in any way arising from inaccurate or incorrect information contained in this catalog.

MANAGEMENT SYSTEM CERTIFICATE

Certificate no.:
CERT-00105-96-AQ-MIL-SINCERT

Initial certification date:
14 September 1993

Valid:
06 December 2021 – 05 December 2024

This is to certify that the management system of

REGINA CATENE CALIBRATE S.p.A. - Sede

Via Monza, 90 - 23870 Cernusco Lombardone (LC) - Italy

and the sites as mentioned in the appendix accompanying this certificate

has been found to conform to the Quality Management System standard:

ISO 9001:2015

This certificate is valid for the following scope:

Design, manufacture, pre and after-sale servicing of standardized and special industrial chains, chains for motorcycle and engine applications. Manufacture of drawn steel wire and flattened wire strips. (IAF: 17, 14)

Place and date:
Vimercate (MB), 03 December 2021

ACCREDIA
L'ENTE ITALIANO DI ACCREDITAMENTO

SGQ N° 033 A
SGA N° 093 D
SGE N° 007 M
SCR N° 034 F
EMAS N° 009 P
PRD N° 033 B
PRS N° 094 C
SSI N° 002 G

Membro di MLA EA per gli schemi di accreditamento SGQ, SGA, PRD, PRS, ISP, GHG, LAB e LAT, di MLA IAF per gli schemi di accreditamento SGQ, SGA, SSI, FSM e PRD e di MRA ILAC per gli schemi di accreditamento LAB, MED, LAT e ISP


For the issuing office:
DNV - Business Assurance
Via Energy Park, 14, - 20871 Vimercate (MB) - Italy

Zeno Beltrami
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.


PERFORMANCE IN MOTION



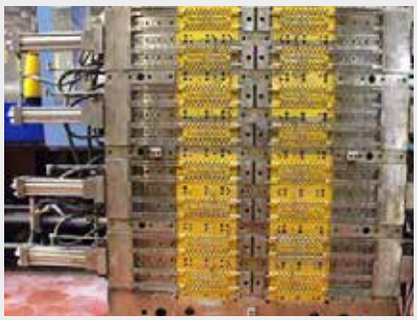


Since 1919

REGINA offers a vanguard and complete product portfolio of conveyor chains, belts and components, made of a wide range of top tier engineered plastics and steel grades, and available in metric and imperial standards. Our products are a top quality solution for the beverage, packaging and glass industries and for many more applications.
We strongly believe in R&D and heavily invest in our factories, where we manufacture all the products we sell. We operate worldwide through a fully owned subsidiaries network with strong local technical knowledge and a large stock.
Established in 1919, REGINA is now owned by the same family since 4 generations.

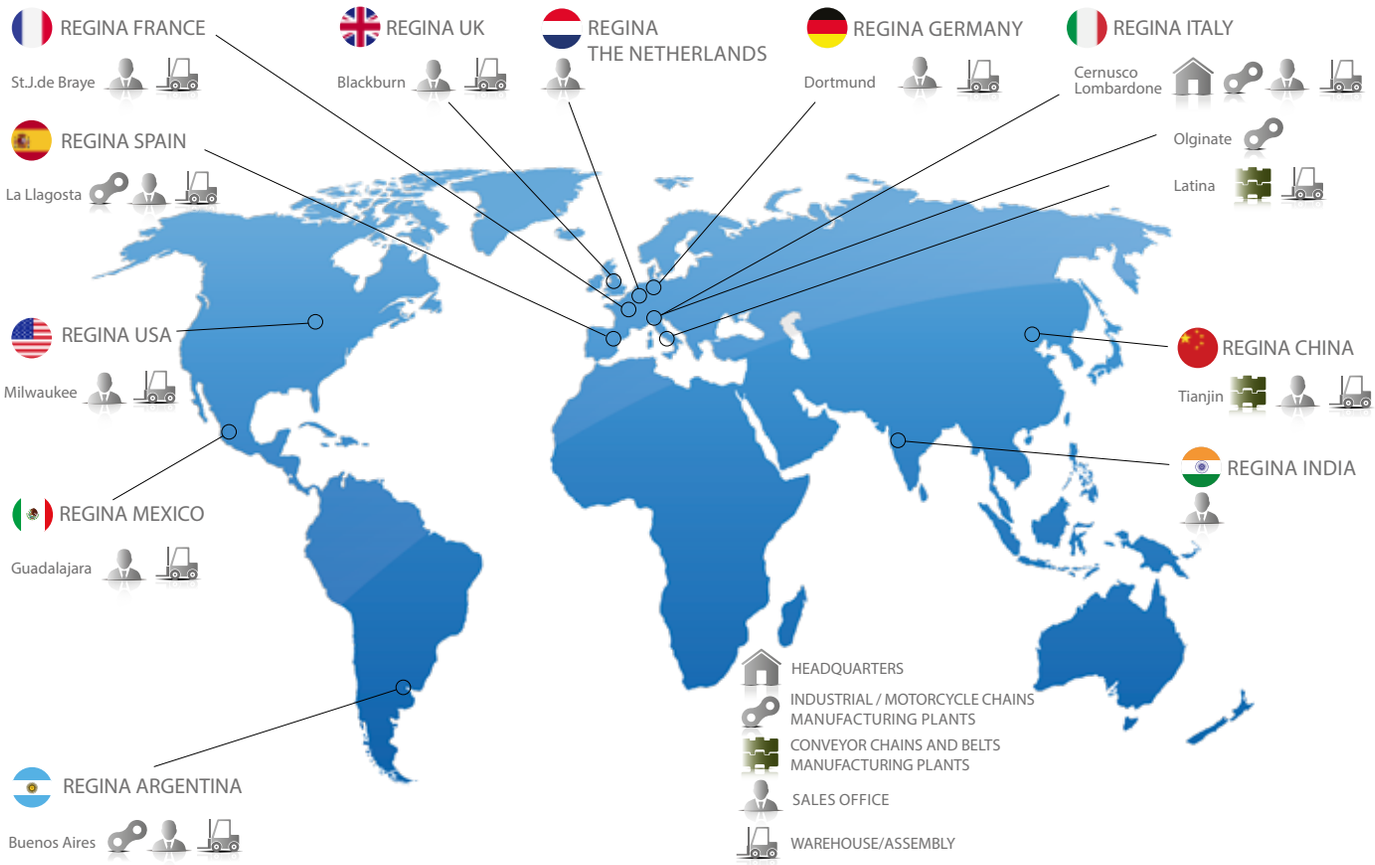

STRAIGHT RUNNING STEEL CHAINS

FliteTop®




915
Single hinge
Reduced plate gap (1,6 mm)
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 42 mm (1.654")

Page 30




PHD 915
Single hinge
Reduced plate gap (1,6 mm)
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 42 mm (1.654")

Page 30



2815
Double hinge
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 80 mm (3.150")

Page 32



PHD 2815
Double hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 80 mm (3.150")

Page 33



PHD 9157
Heavy duty single hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 57 mm (2.244")

Page 34



803
Mini hinge
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 22 mm (0.866")

Page 35


SIDEFLEXING STEEL CHAINS

FliteTop®



881
Bevel
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 43 mm (1.693")

Page 36




981
Bevel
Reduced plate gap
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 43 mm (1.693")

Page 37



881T
TAB
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 43 mm (1.693")

Page 38



981T
TAB
Reduced plate gap
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 43 mm (1.693")

Page 39




981M
Magnetic
Reduced plate gap
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 42 mm (1.654")

Page 40



PHD 981M
Magnetic
Reduced plate gap
Increased pin hardnes
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 42 mm (1.654")

Page 40



PHD 9857M
Magnetic
Heavy duty single hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 57 mm (2.244")

Page 41



982T
TAB
Reduced sideflexing
radius (200 mm)
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 43 mm (1.693")

Page 42


RUBBERIZED SURFACE STEEL CHAINS

FliteTop®




PHDG 915
Straight running
Single hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 42 mm (1.654")

Page 44




PHDG 2815
Straight running
Double hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 80 mm (3.150")

Page 45




PHDG 9157
Straight running
Heavy duty single hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 57 mm (2.244")

Page 46



PHDG 981T
Sideflexing TAB
Reduced plate gap
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 43 mm (1.693")

Page 47



PHDG 981M
Sideflexing magnetic
Reduced plate gap
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 42 mm (1.654")

Page 48




PHDG 9857M
Sideflexing magnetic
Heavy duty single hinge
Increased pin hardness
Pitch 1 ½" (38,1 mm)
Thickness 3 mm (0.118")
Hinge 57 mm (2.244")

Page 49

STRAIGHT RUNNING PLASTIC CHAINS

FliteTop



820
Single hinge
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 41,6 mm (1.638")

Page 52



828
Reinforced single hinge
Reduced plate gap
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 42 mm (1.654")

Page 53




831
Single hinge
Reinforced top plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 41,6 mm (1.638")

Page 54



821
Double hinge
Reinforced top plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 136,5 mm (5.374")

Page 55



8257
Heavy duty single hinge
Reinforced top plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 56

SIDEFLEXING PLASTIC CHAINS

FliteTop



880
Bevel
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 43 mm (1.693")

Page 57



880T
TAB
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 42,9 mm (1.689")

Page 58




880M RG
Magnetic
Reduced plate gap
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 42 mm (1.654")

Page 59



879
Bevel
Reinforced top plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 43 mm (1.693")

Page 60



879T
TAB
Reinforced top plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 61



882
Bevel
Heavy duty single hinge
Reinforced top Plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 61 mm (2.402")

Page 62



882T
TAB
Heavy duty single hinge
Reinforced top Plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 63



882M
Magnetic
Heavy duty single hinge
Reinforced top Plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 64



878T
TAB
Reinforced top Plate
Reduced sideflexing
radius (200 mm)
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 65




880TA
TAB
Vacuum series
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 42,9 mm (1.689")

Page 66


RUBBERIZED SURFACE PLASTIC CHAINS

FliteTop




HFX 820
Straight running
Single hinge
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 41,6 mm (1.638")

Page 68




HFX 821
Straight running
Double hinge
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 136,5 mm (5.374")

Page 69




HFX 8257
Straight running
Heavy duty single hinge
Reinforced Top Plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 70




HFX 880T
Sideflexing TAB
Pitch 1 ½" (38,1 mm)
Thickness 4 mm (0.157")
Hinge 42,9 mm (1.689")

Page 71



HFX 882T
Sideflexing TAB
Heavy duty single hinge
Reinforced Top Plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 72



HFX 882M
Sideflexing Magnetic
Heavy duty single hinge
Reinforced Top Plate
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 73




HFX 1873T
Two Piece
Sideflexing TAB
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 74

TWO-PIECE CHAINS

FliteTop®



1864
Straight running
Steel flights
Pitch ¾" (19,05 mm)
Thickness 3 mm (0.118")
Hinge 27 mm (1.063")

Page 77



1874T/1874TM
Sideflexing TAB
Steel flights
Flight gap 8,2 mm
Reduced flight gap 5,7 mm (1874TM)
Pitch ¾" (19,05 mm)
Thickness 3 mm (0.118")
Hinge 31,8 mm (1.252")

Page 78



843
Straight running
Plastic flights
Pitch ½" (12,7 mm)
Thickness 3.2 mm (0.126")
Hinge 20,6 mm (0.811")

Page 79




845
Straight running
Plastic flights
Bidirectional
Pitch ½" (12,7 mm)
Thickness 3.2 mm (0.126")
Hinge 20,6 mm (0.811")

Page 80



RR 845
Straight running
Plastic flights
Bidirectional
Raised rib
Pitch ½" (12,7 mm)
Thickness 12,2 mm (0.480")
Hinge 20,6 mm (0.811")

Page 81



HF RR 845
Straight running
Plastic flights
Bidirectional
Rubberized raised rib
Pitch ½" (12,7 mm)
Thickness 12,2 mm (0.480")
Hinge 20,6 mm (0.811")

Page 82



863
Straight running
Plastic flights
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 34,1 mm (1.343")

Page 84




1843T
Sideflexing TAB
Plastic flights
Pitch ½" (12,7 mm)
Thickness 3.2 mm (0.126")
Hinge 20 mm (0.787")

Page 85



1873T
Sideflexing TAB
Plastic flights
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 86




1863T
Sideflexing TAB
Plastic flights
Reduced flight gap
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 87



1883
Spiral chain
Plastic flights
Integrated bearings
Pitch 1" (25,4 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 88



HFX 1883
Spiral chain
Rubberized plastic flights
Integrated bearings
Pitch 1" (25,4 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 89

GRIPPER CHAINS

FliteTop®



GV 1874T
Two - piece
Steel flights
Short fingers
Pitch ¾" (19,05 mm)
Thickness 3 mm (0.118")
Hinge 31,8 mm (1.252")

Page 93




EV 1874T
Two - piece
Steel flights
Long fingers
Pitch ¾" (19,05 mm)
Thickness 3 mm (0.118")
Hinge 31,8 mm (1.252")

Page 94



GW 1873T
Two - piece
Plastic flights
Short fingers
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 95



EW 1873T
Two - piece
Plastic flights
Long fingers
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 96



GS 1873T
Two - piece
Plastic flights
Special D-shape
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 97



GD 1873T
Two - piece
Plastic flights
D-shape
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 98



GD 1873T
Two - piece
Plastic flights
D-shape
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 99



GC 1873T
Two-piece
Plastic flights
"House"-shape rubber
Pitch ¾" (19,05 mm)
Thickness 4 mm (0.157")
Hinge 32,1 mm (1.264")

Page 100



EW 1843T
Two-piece
Plastic Flights
Long Fingers
Pitch ½" (12,7 mm)
Thickness 3,3 mm (0.130")
Hinge 19,85 mm (0.781")

Page 101



GW 878T
One - piece
Plastic plates
Short fingers
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 102



EW 878T
One - piece
Plastic plates
Long fingers
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 103




GD 878T
One - piece
Plastic plates
D-shape
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 42,9 mm (1.689")

Page 104


LBP CHAINS (LOW BACK-LINE PRESSURE)

FliteTop



LBP 821
Straight running
Double hinge
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 136,5 mm (5.374")

Page 107



LBP 8257
Straight running
Heavy duty single hinge
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 108



LBP 882T
Sideflexing TAB
Heavy duty single hinge
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 109



LBP 882M
Sideflexing Magnetic
Heavy duty single hinge
Pitch 1 ½" (38,1 mm)
Thickness 4,8 mm (0.189")
Hinge 57 mm (2.244")

Page 110

BIPLANAR CHAINS

FliteTop



1700
Sideflexing
Increased product
support surface
Pitch 1.97" (50 mm)
Thickness 4 mm (0.157")

Page 112



Turning disc
For 1700 Series

Page 113



1702
Sideflexing
Pitch 1.97" (50 mm)
Thickness 5 mm (0.197")

Page 115




1701T
Sideflexing TAB
Pitch 1.97" (50 mm)
Thickness 5 mm (0.197")

Page 116

SPROCKETS FOR CHAINS

FliteTop





Page 119


8mm NANOPITCH BELT

Matveyor®



8300
Solid Top
Imperial width standard
Thickness 6,15 mm (0.242")

Page 163




Sprockets
8300 series

Page 164


½" PITCH BELTS AND CHAINS

Matveyor®




600
Solid top
Flat bottom surface
Metric width standard
Thickness 8,7 mm (0.343")

Page 169




600G ATM
Active transfer modules
Solid top
Metric width standard
Thickness 8,7 mm (0.343")

Page 171




610
Solid top
Round bottom surface
Metric width standard
Thickness 8,7 mm (0.343")

Page 172



500
Flush grid
Metric width standard
Thickness 8,7 mm (0.343")

Page 174



HF 510
Rubberized surface
Metric width standard
Thickness 8,7 mm (0.343")

Page 175




HFS 510
Rubberized surface
Side Indent
Metric width standard
Thickness 8,7 mm (0.343")

Page 176



LBP 610
LBP rollers
Metric width standard
Thickness 8,7 mm (0.343")

Page 177



300
Solid Top
Imperial width standard
Thickness 8,7 mm (0.343")

Page 178




300G ATM
Active transfer modules
Solid top
Imperial width standard
Thickness 8,7 mm (0.343")

Page 179



200
Flush grid
Imperial width standard
Thickness 8,7 mm (0.343")

Page 180



HF 200
Rubberized surface
Imperial width standard
Thickness 8,7 mm (0.343")

Page 181



Static and Dynamic Nosebar
For ½" pitch belts with metric and imperial width standard

Page 182



611 / RR 611
Narrow chains
Solid top (611)
Raised Rib (RR 611)
Thickness 8,7 mm (0.343")

Page 185



HF 500
Narrow Chain
Rubberized Surface
Thickness 8,7 mm (0.343")

Page 188



650M
Sideflexing Chain
Magnetic
Solid Top
Thickness 8,7 mm (0.343")

Page 189



Sprockets
611 series
600 series

Page 190

1" PITCH LIGHT DUTY BELTS AND CHAINS

Matveyor®



1600
Solid top
Metric width standard
Thickness 8,7 mm (0.343")

Page 198




1600G ATM
Active transfer modules
Solid top
Metric width standard
Thickness 8,7 mm (0.343")

Page 200



1501
Dedicated chains
Flush grid
Metric width standard
Thickness 8,7 mm (0.343")

Page 201




1500
Flush grid
Metric width standard
Thickness 8,7 mm (0.343")

Page 202



1500G ATM
Active transfer modules
Flush grid
Metric width standard
Thickness 8,7 mm (0.343")

Page 204



1500 with flights

Page 205




RR 1500
Raised rib
Metric width standard
Thickness 8,7 mm (0.343")

Page 207



HF 1600
Rubberized surface
Metric width standard
Thickness 8,7 mm (0.343")

Page 209




HFS 1600
Rubberized surface
Side indent
Metric width standard
Thickness 8,7 mm (0.343")

Page 210



RR 1600
Dedicated chains
Raised rib
Metric width standard
Thickness 8,7 mm (0.343")

Page 211



1110
Raised rib
Imperial width standard
Thickness 9,6 mm (0.378")

Page 213




Sprockets
1010 series

Page 215


3/4" PITCH MEDIUM DUTY BELTS AND CHAINS

Matveyor®




7300
Solid top
Imperial width standard
Thickness 8,7 mm (0.343")

Page 224



7300G ATM
Active transfer modules
Solid top
Imperial width standard
Thickness 8,7 mm (0.343")

Page 226



7200
Flush grid
Imperial width standard
Thickness 8,7 mm (0.343")

Page 227




Sprockets
7300 series

Page 229


1" PITCH HEAVY DUTY BELTS AND CHAINS

Matveyor®




USPM
Solid top
Metric width standard
Thickness 12,7 mm (0.500")

Page 234




USPMG ATM
Active transfer modules
Solid top
Metric width standard
Thickness 12,7 mm (0.500")

Page 236



HF USPM
Rubberized surface
Metric width standard
Thickness 12,7 mm (0.500")

Page 237




HFS USPM
Rubberized surface
Side indent
Metric width standard
Thickness 12,7 mm (0.500")

Page 238




LBP USPM
LBP rollers
Metric width standard
Thickness 12,7 mm (0.500")

Page 239



LBP XSPM
LBP rollers
Safety design
Metric width standard
Thickness 11 mm (0.433")

Page 240



USP
Solid top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 241



USPG ATM
Active transfer modules
Solid top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 243



Sprockets
USP series

Page 244

NEW



1305
Solid top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 247

NEW



1305G ATM
Active transfer modules
Solid top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 249

NEW



1405
Perforated top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 250

NEW



Sprockets
1305 series

Page 252

1" PITCH SIDEFLEXING CHAINS

Matveyor®



783T
TAB
Solid top
For light duty belts
Thickness 8,7 mm (0.343"

Page 256



783M
Magnetic
Solid top
For light duty belts
Thickness 8,7 mm (0.343")

Page 257



782M
Magnetic
Flush grid
For light duty belts
Thickness 8,7 mm (0.343")

Page 257



793T
TAB
Solid top
For heavy duty belts
Thickness 12,7 mm (0.500")

Page 258



793M
Magnetic
Solid top
For heavy duty belts
Thickness 12,7 mm (0.500")

Page 259



793L
Low Pin Center
Solid Top
For heavy duty belts
Thickness 12,7 mm (0.500")

Page 260



Sprockets
782 series

Page 261


1 ¼" PITCH HEAVY DUTY SIDEFLEXING BELTS

Matveyor®



2556HTB
TAB+Bearing
Reinforced outer module
Metric width standard
Thickness 12,7 mm (0.500")

Page 265



2556HTB-SR
TAB+Bearing
Reinforced outer module
Reduced sideflexing radius
Metric width standard
Thickness 12,7 mm (0.500")

Page 266



Sprockets
2556 series

Page 267

HEAVY DUTY FIXED RADIUS BELTS


NEW

Matveyor®



4650
Solid top
Metric width standard
Thickness 8,7 mm (0.343")

Page 274



HF 4650
Rubberized surface
Metric width standard
Thickness 8,7 mm (0.343")

Page 277



Sprockets
4650 series

Page 280

2" PITCH HEAVY DUTY RAISED RIB BELTS

Matveyor®



3135
Raised rib
Seamless product support
at the edges of the belt
Imperial width standard
Thickness 14,2 mm (0.580")

Page 284



Sprockets
3000 series

Page 289


1 1/2" PITCH HEAVY DUTY UCC CHAINS

ULTOP®



UCC
Solid top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 293



UCCG ATM
Active transfer modules
Solid top
Imperial width standard
Thickness 12,7 mm (0.500")

Page 294



UCC 138
¾" Pitch
Solid top
Imperial width standard
Thickness 15 mm (0.591")


Page 295



Sprockets
UCC series
UCC138 series

Page 296

CORNER TRACKS



Magnetic curves
For FliteTop® and Matveyor® chains

Page 301




TAB curves
For FliteTop® chains and Matveyor® sideflexing belts and chains

Page 342



Bevel curves
For FliteTop® chains

Page 347



Low Pin Center curves
For Matveyor® chains


Page 350

CONVEYOR COMPONENTS



Modular transfer plate with steel rollers
For Matveyor® belts

Page 353




Modular transfer plates with plastic rollers
For FliteTop® chains and Matveyor® belts

Page 355



Return rollers
For FliteTop® chains, Matveyor® belts and chains, ULTOP® chains

Page 356




Guide flanges
For FliteTop® chains, Matveyor® belts and chains, ULTOP® chains

Page 358



Return shoe guide
For FliteTop® LBP chains and Matveyor® LBP belts

Page 358



Wear strips
For FliteTop® chains, Matveyor® belts and chains, ULTOP® chains

Page 359



Product side guides

Page 363

STEEL AND THERMOPLASTIC CHAINS, MODULAR BELTS

	Type	Description	Features
STEEL	S	**Carbon Steel**	Through hardened carbon steel. Surface and core hardness of 43 HRC. Excellent strength and wear resistance. Not suitable in presence of water.
	SS - 4	**Ferritic Stainless Steel**	Cold rolled ferritic stainless steel. Good wear, mechanical and corrosion resistance. For food & beverage applications.
	P	**PRIMA** **Superior Grade Ferritic Stainless Steel**	Superior grade of cold rolled special ferritic stainless steel. Special Cr-Ni alloy offering very good wear and mechanical properties. Particularly suitable for high productivity lines (combiners and inliners).
	SS	**Austenitic Stainless Steel**	Cr-Ni austenitic cold rolled stainless steel. It guarantees the best corrosion resistance to withstand chemical attack. It offers very good wear resistance, due to work hardening and homogeneous chemical structure.
ACETAL POM	WA *White*	**White Acetal**	DuPont™ Delrin® homopolymer acetal resin.
	UP *Dark Brown*	**Ultra Performance Homopolymer Delrin ®**	DuPont™ Delrin® Ultra Performance special homopolymer acetal resin. Particularly suitable for applications where low coefficient of friction and contained dusting are needed.
	DF2™ *Dark Green*	**Special Delrin ® Reinforced with Kevlar ®**	**Next generation material, based on a Delrin® acetal resin reinforced with Kevlar®**, developed by REGINA and DuPont™, able to reach the lowest coefficient of friction with maximum wear resistance. Thanks to the superior properties of DF2™, the usage of lubricants can be drastically reduced or even eliminated without loosing performance in conveyor applications.
	NEW e-F.A.S.T. B+F *Blue*	**Ecological Friction Abating Thermoplastic**	Ultimate dry running homopolymer acetal resin developed combining REGINA field expertise with DuPont™ centenarian acetal resin knowledge. Today's standards for high performance filling lines require a combination of high speed and high productivity, while reducing or eliminating lubrication. REGINA e-F.A.S.T. material is capable of exceeding such standards, thanks to its unique characteristic of delivering a much lower and constant coefficent of friction over time in dry or almost dry running conditions vs. other plastic chains.
	AS *Black*	**Antistatic Acetal Resin**	Conductive acetal resin particularly suitable for all applications where static charges on the chain must be avoided.
POLYAMIDE	AR *Black*	**Abrasion Resistance Polyamide**	Suitable for glass manufacturing applications. Reinforced polyamide with excellent wear resistance and low dusting. Only for dry running applications.
POLYPROPYLENE	P *Light Blue*	**Reinforced Polypropylene**	For FliteTop® Chains. Reinforced polypropylene that guarantees the best corrosion resistance to withstand chemical attack and an optimum high temperature resistance.
	PP *Grey*	**Special Polypropylene**	For Matveyor® Belts. Special polypropylene that guarantees the best corrosion resistance to withstand chemical attack and an optimum high temperature resistance.
POLYESTER	ULF *Light Grey*	**Ultra Low Friction Polyester Resin**	Polyester resin that offers good mechanical strength in combination with low coefficient of friction.

DuPont™ Delrin® and DuPont™ Kevlar® are registered trade marks of E.I. DuPont De Nemours and Associates.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

RUBBERS

	Type	Description	Features
RUBBER	NBR *Black*	**NBR Rubber**	NBR Rubber with hardness of 70 ShA, applied on stainless steel chains, guarantees an excellent product grip on inclined/declined conveyors, high wear resistance and superior resistance against sanitizers ordinary used in bottling industries.
	TPE *Green*	**Thermoplastic Rubber**	Special Thermoplastic rubber with hardness from 50 ShA up to 70 ShA and optimum wear resistance that guarantees exceptional product grip in inclined/declined conveyors and elevators/ lowerators, extending life without loosing elasticity.
	TPE *Grey*		
	TPE *Dark Grey*		
	HS *Grey*	**Heat Stabilized Thermoplastic Rubber**	Special Thermopastic rubber resistant to high temperatures, with hardness from 45 ShA to 70 ShA, for rinser and cap sterilizer applications.
	EPDM *Black*	**EPDM Rubber**	For gripper chain series. EPDM rubber with hardness of 60 ShA guarantees an excellent grip and high temperature resistance.

BASE ROLLER CHAINS

	Type	Description	Features
STEEL	S	**Carbon Steel**	Through hardened carbon steel. Excellent strength and wear resistance.
	SS	**Stainless Steel**	Stainless Steel for the best corrosion resistance to withstand chemical attack. Prelubricated with high performance lube suitable for the food industry (USDA H1 approved) which guarantees long-lasting effect for the chain.
	BS	**Maintenance free carbon steel**	For "lube-free" applications. ENDURO maintenance free chains outlast standard chains without periodic lubrication. The unique tecnology and "heavy wall" design of the sintered bushing ensures excellent wear resistance.
	S+NC	**Carbon Steel Nickel Plated**	Through hardened carbon steel and electroless nickel plating for good corrosion resistance. Excellent strength and wear resistance.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SPROCKETS AND TURNING DISCS

	Type	Description	Features
POLYAMIDE	PA *White*	**Polyamide**	For sprockets. Machined polyamide that guarantees toughness combined with wear and abrasion resistance.
	PGF *Black*	**Reinforced Polyamide**	For sprockets and turning discs. Moulded polyamide reinforced with glass fibers allowing higher strength and excellent abrasion resistance.
ACETAL POM	WA *White*	**White Acetal**	For sprockets 3000 series. DuPont™ Delrin® homopolymer acetal resin.

CURVES AND STATIC NOSEBAR

	Type	Description	Features
POLYETHYLENE	SUPREME -A *Green*	**UHMWPE**	For Magnetic and Low Pin Center curves. Ultra high molecular weight polyethylene (about 7 milion gr/mole) with good wear resistance and low coefficient of friction.
	e-SLIDE *Blue*	**High performance Self-Lubricating UHMWPE**	For Magnetic, TAB, Bevel and Low Pin Center curves. New ultimate Ultra High Molecular Weight Polyethylene (molecular density of 9.000.000 g/mol), developed and produced in-house by REGINA. Thanks to special lube additives compounded with the material, provides superior sliding performance and excellent wear resistance of chains and belts in most critical conveying applications characterized by high-speeds, dry running conditions, high abrasion.
	UHMWPE *Black*	**UHMWPE**	For Bevel and TAB curves. Ultra high molecular weight polyethylene with good wear and abrasion resistance.
	SUPREME -L *Grey*	**Self-Lubricating UHMWPE**	For ½" pitch belts nosebar. High grade of ultra high molecular weight polyethylene (about 7-9 milion gr/mole) with optimum wear and abrasion resistance, combined with advanced lubricant for excellent sliding properties.
POLY AMIDE	SUPREME -S *Yellow*	**Oil-Filled PA**	For Magnetic, TAB, Bevel and Low Pin Center curves. Special high grade and oil-filled polyamide, with superior abrasion resistance and extremely high PV limit. Dry running only.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


CONVEYOR COMPONENTS

	Type	Description	Features
ACETAL POM	DG *Dark Grey*	**Acetal Resin**	For combs. Good wear resistance and low coefficient of friction.
POLYETHYLENE	HDPE *Black*	**High Density Polyethylene**	For return rollers, product side guide and shoe guide. High density polyethylene with low coefficent of friction and good wear resistance.
	HDPE *Grey*		
	HDPE *Green*		
	UHMWPE *Green*	**UHMWPE**	For wear strips. Ultra high molecular weight polyethylene with reduced coefficent of friction and high wear resistance.
	UHMWPE *Black*		
	e-SLIDE *Blue*	**High performance Self-Lubricating UHMWPE**	For wear strips. New ultimate Ultra High Molecular Weight Polyethylene (molecular density of 9.000.000 g/mol), developed and produced in-house by REGINA. Thanks to special lube additives compounded with the material, provides superior sliding performance and excellent wear resistance of chains and belts in most critical conveying applications characterized by high-speeds, dry running conditions, high abrasion.
POLYPRO PYLENE	PP *Black*	**Polypropylene**	For guide flanges. Lightweight material that offers optimum chemical and high temperature resistance.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

Developed with DUPONT and on the market for 20 years, DK² is a lubricated acetal resin reinforced with Kevlar® that combines a **low coefficient of friction** with a **very high wear resistance**, resulting in longer chain life and running-cost savings.

COF IN DRY RUNNING CONDITIONS*

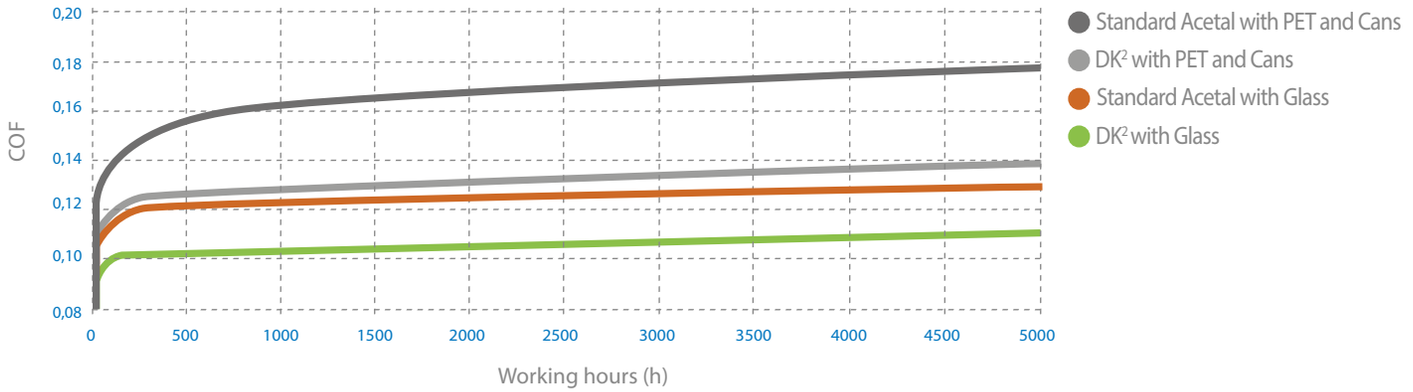

WEAR IN DRY RUNNING CONDITIONS*

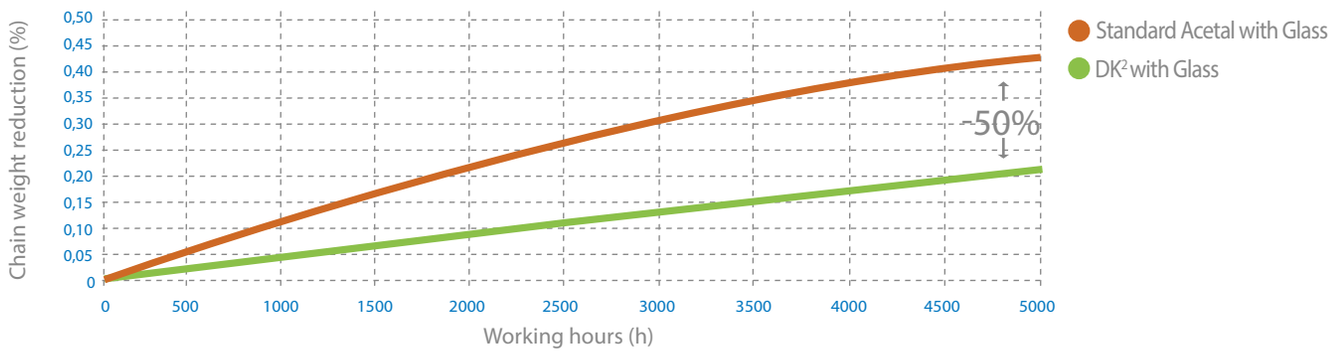

FEATURES

- Excellent for PET, Can and Glass applications
- Lower coefficient of friction in dry running conditions vs. standard acetal resin
- 30-50% superior wear resistance in dry running conditions vs. standard acetal resin (depending on container material)

BENEFITS

- Significant reduction or elimination of lubrication, leading to:
  - Less lube "build-up"
  - Reduction of motor power absorption
  - Longer center to center distances
- Very significant chain life increase vs. standard acetal resins
- Lower running and maintenance costs vs. standard acetal resins

*Coefficient of friction and wear data measured in actual field tests


Copyright Regina Catene Calibrate s.p.a. - 2022, All rights reserved

FRICTION ABATING SLIDING THERMOPLASTIC


NEW FOR PET BOTTLES

Developed with DUPONT , e-F.A.S.T.™ BT is the ultimate dry running acetal resin compounded with specific lubricants for PET bottling applications, able to deliver a **much lower and constant coefficient of friction** and **minimal elongation** over time **in dry running conditions** vs. other plastic chains.

COF IN DRY RUNNING CONDITIONS*

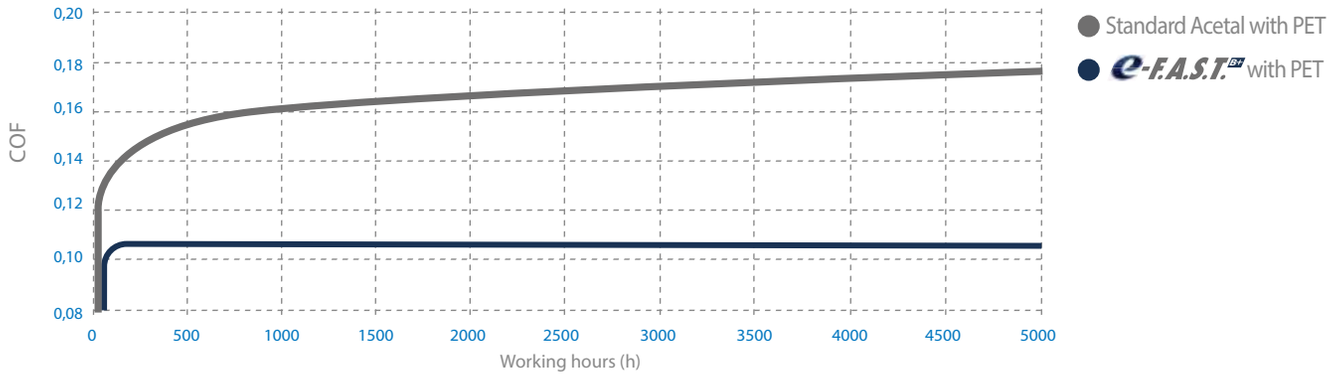

WEAR IN DRY RUNNING CONDITIONS*

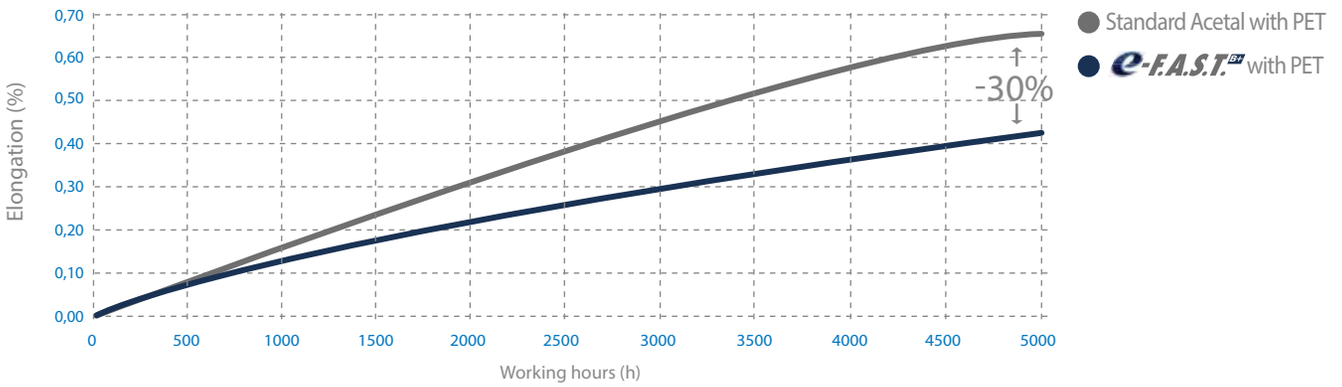

FEATURES

- Lowest coefficient of friction in PET dry running applications
- Long lasting and constant coefficient of friction
- Negligible dusting in dry running conditions

BENEFITS

- Elimination or strong reduction of lubrication
- Reduced chain pull and increased energy savings
- Increased chain life
- Reduced maintenance costs

*Coefficient of friction and wear data measured in actual field tests

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MATERIALS WORKING TEMPERATURES

The materials used by REGINA can be applied in the range of temperatures stated in the following tables.

TABLE "A"

	MATERIAL	USED FOR	MIN. TEMPERATURE		MAX. TEMPERATURE DRY ENVIRONMENT		MAX. TEMPERATURE WET ENVIRONMENT	
			°C	°F	°C	°F	°C	°F
STEEL	CARBON STEEL S	CHAINS	-30	-22	+371	+700	–	–
	FERRITIC STAINLESS STEEL SS - 4 P	CHAINS	-40	-40	+427	+800	+427	+800
	AUSTENITIC STAINLESS STEEL SS	CHAINS	-40	-40	+538	+1000	+538	+1000
PLASTIC	ACETAL RESIN AS UP DT2™ WA DG e-F.A.S.T.BT	CHAINS / BELTS/ SPROCKETS /COMBS	-40	-40	+80	+176	+65	+149
	POLYPROPYLENE P PP PP	CHAINS / BELTS / COMPONENTS	0	32	+104	+220	+104	+220
	ABRASION RESISTANT POLYAMIDE* AR	CHAINS / BELTS	-40	-40	+100	+212	–	–
	POLYESTER RESIN ULF	CHAINS / BELTS	+4	+39	+80	+176	+65	+149
	POLYAMIDE PA PGF	SPROCKETS / TURNING DISCS	-20	-4	+120	+248	+120	+248
	POLYETHYLENE SUPREME -A SUPREME -L UHMWPE e-SLIDE HDPE HDPE UHMWPE UHMWPE HDPE	CURVES / NOSEBAR / COMPONENTS	-40	-40	+80	+176	+80	+176
	POLYAMIDE* SUPREME -S	CURVES	-40	-40	+100	+212	–	–

* For dry running applications only.

TABLE "B"

RUBBER MATERIAL	COLOUR	AVERAGE HARDNESS	MIN. TEMPERATURE		MAX. TEMPERATURE DRY ENVIRONMENT		MAX. TEMPERATURE WET ENVIRONMENT		NOT SUITABLE WITH	RESISTANT TO
		ShA	°C	°F	°C	°F	°C	°F		
NBR NBR	BLACK	70	-10	+14	+110	+230	+80	+176	STRONG ACIDS AND BASES	OILS
EPDM EPDM	BLACK	60	-30	-22	+120	+248	+120	+248	OILS	WEAK ACIDS
THERMOPLASTIC TPE TPE TPE	GREEN/GREY/ DARK GREY	50-70	-40	-40	+80	+176	+80	+176	OILS	WEAK ACIDS
HEAT STABILIZED THERMOPLASTIC HS	GREY	45-70	-30	-22	+130	+266	+130	+266	OILS	HIGH TEMPERATURES

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

CHAINS MATERIALS CHEMICAL RESISTANCE

It is important to choosing the right material for FliteTop®, Matveyor® and ULTOP® chains and belts according to possible chemicals used in application.
As a guide TABLE "C" shows the performance of FliteTop®, Matveyor® and ULTOP® chains/belts materials with various chemicals. For chemicals not listed in TABLE "C", please contact our Technical Service group for advice.

TABLE "C"

CHEMICAL AGENT	CARBON STEEL	AUSTENITIC STAINLESS STEEL	FERRITIC STAINLESS STEEL		ACETAL RESIN		POLYPROPYLENE		ABRASION RESISTANT POLYAMIDE	POLYESTER RESIN
	S	SS	SS - 4	P	AS	UP / WA	P	PP	AR	ULF
ACETIC ACID 5%	-	*	-		-		*		+	*
ACETONE	-	*	*		+		*		*	+
ALCOHOL	*	*	*		*		*		*	*
AMMONIA CONC.	+	*	*		-		*		*	+
AMMONIA WATER SOL.	+	*	*		*		*		*	*
ANILINE 3%	/	/	/		*		*		/	+
AQUA REGIA	-	-	-		-		+		/	/
BEER	+	*	*		*		*		*	*
BENZENE	*	*	*		*		*		*	-
BENZOL	*	*	*		*		*		*	+
BRINE ACID	-	+	-		+		*		+	+
BUTYRIC ACID	*	*	*		-		*		-	/
CARBON TETRACHLORIDE	+	+	+		*		-		*	/
CHLORINE WATER	-	+	+		-		*		-	*
CHOCOLATE	+	*	*		-		+		-	+
CITRIC ACID	-	*	+		+		*		+	+
FORMALDEHYDE	*	*	*		*		*		*	*
FORMIC ACID 10%	-	-	-		-		*		-	+
FRUIT JUICE	-	*	+		*		*		*	*
GASOLINE	*	*	*		*		+		*	+
GRAPE HUSK	-	+	-		-		*		-	+
HYDROCHLORIC ACID 2%	-	-	-		-		*		-	+
HYDROCHLORIC ACID 37%	-	-	-		-		*		-	-
HYDROGEN PEROXIDE	-	*	+		-		*		-	+
IODINE	-	-	-		-		-		-	-
LACTIC ACID	-	*	+		*		*		+	*
MILK	*	*	*		*		*		*	*
MUSTARD	*	*	*		-		+		-	+
NITRIC ACID 5%	-	*	*		-		*		-	+
OIL	*	*	*		*		-		-	*
OIL (VEGETABLE &MINERAL)	*	*	*		*		*		*	*
PARAFFIN	*	*	*		*		*		*	*
PHOSPHORIC ACID %	-	*	+		-		*		-	-
SEA WATER	-	+	-		+		*		-	*
SOAP & WATER	+	*	*		*		*		*	*
SODIUM CHLORIDE	-	+	-		*		*		*	*
SODIUM HYDROXIDE 25%	-	*	*		-		*		/	-
SODIUM HYPOCHLORITE	-	+	-		-		*		*	+
SOFT DRINKS	+	*	*		*		*		*	*
SPIRITS	*	*	*		*		*		*	*
SULPHURIC ACID 40%	-	-	-		-		*		-	+
TOLUENE	/	/	/		+		+		/	+
TURPENTINE	*	*	*		/		*		/	*
VEGETABLE JUICE	+	*	*		*		*		*	*
WATER	-	*	*		*		*		*	*
WINE	*	*	*		*		*		*	*
XYLOL	/	/	/		/		/		/	/

LEGEND
*=SATISFACTORY
+=MARGINAL
-=UNSATISFACTORY
/=UNDETERMINED

Data shown in the table was taken from laboratory tests performed on unstrained samples and are merely indicative. Chemical resistance under normal working conditions can depend on various factors, such as stress and temperature, concentration of the chemical agent and duration of its effects.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

	CONVEYED PRODUCTS	FliteTop® CHAINS	PRODUCTS — STEEL CHAINS: Carbon Steel S	Ferritic SS-4 P	Austenitic SS	PHD Series*	Rubberized Series NBR
FOOD / BEVERAGE / BOTTLING APPLICATIONS	CANS (2-3 PIECES)	Depalletizer					
		Inliner/combiner					
		Mass conveyors					
		Accumulation tables					
		Sterilizers / Rinsers Elevators / Lowerators					
		Infeed packaging machines					
		Packaging machines					
		Packaged products convey					
		Inclined conveyors					
	PET BOTTLES	Inliner/combiner					
		Mass conveyors					
		Accumulation tables					
		Sterilizers / Rinsers Elevators / Lowerators					
		Infeed packaging machines					
		Packaging machines					
		Packaged products convey					
		Inclined conveyors					
	GLASS BOTTLES**	Depalletizer		■			
		Inliner/combiner		■		■	
		Mass conveyors		■		■	
		Accumulation tables		■			
		Sterilizers / Rinsers Elevators / Lowerators					
		Infeed packaging machines		■		■	
		Packaging machines		■		■	
		Packaged products convey		■		■	
		Inclined conveyors					■
GLASS MFG.	GLASS BOTTLES	Inliner/combiner	■	■	■	■	
		Mass conveyors	■	■	■	■	
		Accumulation tables	■	■	■	■	
		Palletizer	■	■	■	■	
		Omega / Blowing Machines					
SPECIAL APPLICATIONS	AUTOMOTIVE / MECHANICAL IND.	Conveyors lines	■	■		■	
	CHEMICAL, DETERGENTS, PHARMACEUTICAL AND COSMETICS IND.	Conveyors lines			■		
	DAIRY IND.	Conveyors lines					

* PHD Series features PRIMA material plates and hardened martensitic stainless steel pins.

** In case of returnable glass bottles, please contact REGINA Application Engineers.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PRODUCTS									
PLASTIC CHAINS					SPECIAL CHAINS				
Acetal UP	D-LINK	e-FAST	Abrasion Resistant AR	Poly propylene P	HFX Rubberized Series	Two Piece	Gripper	LBP	Biplanar
■	■								
■	■								
■	■								
■	■								
							■		
■	■								
■	■					■			
■	■				■	■		■	
					■				
■	■	■							
■	■	■							
■	■	■							
							■		
■	■	■							
■	■	■				■			
■	■	■			■	■		■	
					■				
■	■								
■	■								
■	■								
■	■								
							■		
■	■								
■	■					■			
■	■					■		■	
					■				
	■		■						
	■		■						
	■		■						
	■		■						
							■		
	■		■			■			
■				■					
									■

For more detailed information, contact REGINA Technical Department.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

Matveyor® ULTOP® CHAINS/ BELTS

	CONVEYED PRODUCTS		PRODUCTS: NANO-PITCH (8mm)	LIGHT DUTY SHORT PITCH (½")						LIGHT DUTY (1" PITCH)		
			8300	600 610 300	500 200	HF 510 HFS 510 HF 200	611 RR611 HF500	LBP610	650M	1600	1500	1501
FOOD / BEVERAGE / BOTTLING APPLICATIONS	CANS (2-3 PIECES)	Depalletizer		■	■					■	■	
		Inliner/combiner								■		■
		Mass conveyors		■	■					■	■	
		Accumulation tables		■	■					■	■	
		Warmer										
		Infeed packaging machines		■	■				■	■	■	
		Packaging machines	■		■	■	■					
		Packaged products convey	■	■	■	■		■		■	■	
	PET BOTTLES	Inliner/combiner								■		■
		Mass conveyors		■	■					■		
		Accumulation tables		■	■					■	■	
		Warmer										
		Infeed packaging machines		■	■				■	■		
		Packaging machines	■	■	■	■	■					
		Packaged products convey	■	■	■	■		■		■	■	
	GLASS BOTTLES	Depalletizer		■						■		
		Inliner/combiner								■		
		Mass conveyors		■						■		
		Accumulation tables										
		Pasteurizer										
		Infeed packaging machines		■					■	■		
		Packaging machines	■	■	■	■	■					
		Packaged products convey	■	■		■		■		■		
GLASS MFG.	GLASS BOTTLES	Inliner/combiner								■		
		Mass conveyors		■						■		
		Accumulation tables		■						■		
		Palletizer		■						■		
SPECIAL APPLICATIONS	PHARMACEUTICAL DETERGENT COSMETICS CONTAINERS	Conveyors lines	■	■	■		■			■	■	
	BAKERY	Conveyors lines	■	■	■					■		
	PAPER/ CARDBOARD	Conveyors lines		■						■		

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PRODUCTS

LIGHT DUTY (1" PITCH)			MEDIUM DUTY (¾" PITCH)		HEAVY DUTY (1" PITCH)			ULTOP® HEAVY DUTY UCC 1 ½" PITCH)		SIDEFLEXING CHAINS (1" PITCH)			HEAVY DUTY RAISED RIB (2" PITCH)	SIDEFL. BELTS (1 ¼" PITCH)	FIXED RADIUS BELTS
RR1600	RR1500 11100	HF1600 HFS1600	7300	7200	USP USPM 1305	HF USPM HFS USPM	LBP XSPM LBP USPM	UCC	UCC 138 (¾" Pitch)	783M 783T	782M	793T 793M 793L	3135	2556HTB 2556HTB-SR	4650 HF 4650
			■	■											
			■	■				■		■	■				
			■	■				■		■	■				
	■		■	■									■		
													■		
	■		■	■				■							
■									■						
	■	■	■	■	■	■	■	■						■	■
			■					■		■					
			■					■		■					
	■		■	■											
													■		
	■		■												
■									■						
	■	■	■	■	■	■	■	■						■	■
			■		■			■				■			
			■		■			■		■		■			
			■		■			■		■					
					■										
													■		
			■		■			■							
■									■						
		■	■		■	■	■	■						■	■
			■		■			■		■		■			
			■		■			■		■		■			
			■		■								■		
			■		■										
■			■	■					■	■	■				
			■		■			■		■		■		■	■
			■		■			■						■	■

For more detailed information, contact REGINA Technical Department.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION






REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®



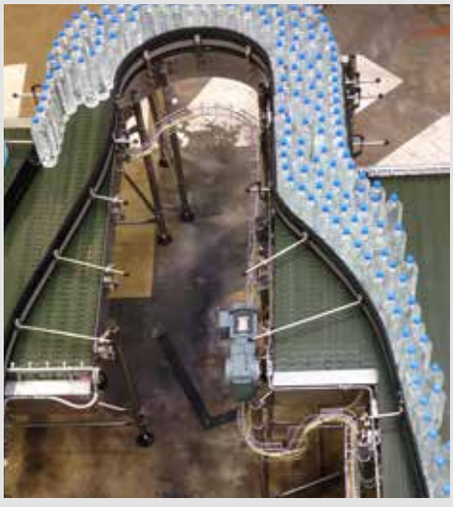



REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

Steel Chains

INDUSTRIES AND APPLICATIONS

STAINLESS STEEL CHAINS

Suitable for handling: new glass and returnable glass containers, kegs, crates.



INDUSTRIES

Bottling and canning
Food filling
Glass manufacturing
Consumer goods

APPLICATIONS

Depallettizer
Inliner / combiner
Mass conveyors
Accumulation tables
Infeed / outfeed packaging machines
Packaged product convey

CARBON STEEL CHAINS

Suitable for handling: new glass & metal containers, abrasive components.



INDUSTRIES


Glass manufacturing
Automotive / Mechanical

APPLICATIONS

Inliner / combiner
Mass conveyors
Accumulation tables
Pallettizer

FEATURES

- Premium surface finishing and flatness.
- PRIMA material available (REGINA Cr-Ni based SS special alloy) with improved wear resistance and sliding properties, suitable for high speed bottling lines.
- Hardened pin available (PHD series) for the highest resistance to chain elongation over a long period of time.

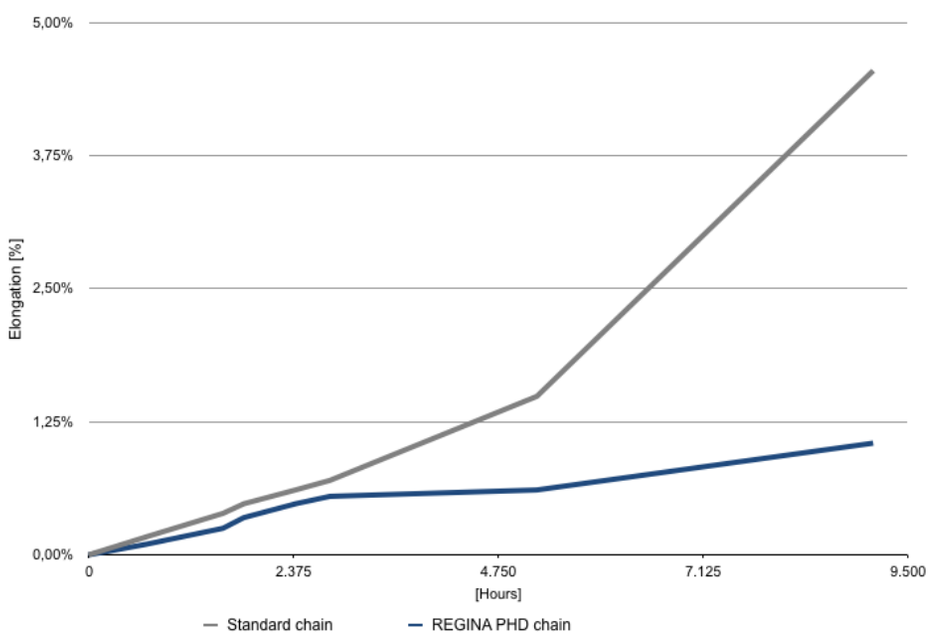

Application conditions


Product conveyed: glass returnable
Test area: uncaser
Dirty environment
Lubrication: water and soap
Conveyor length: 5 mt
Chain speed: 21 m/1' (60.000 b/h)

FliteTop®

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SINGLE HINGE
REDUCED PLATE GAP 1,6 mm
INCREASED PIN HARDNESS (PHD 915 SERIES)
SPECIAL XPHD CHAINS FOR PRESSURELESS COMBINERS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 42 mm (1.654")



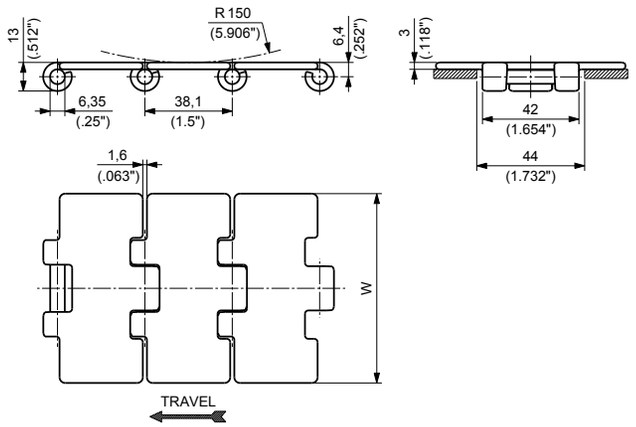

Materials see page 14
Sprockets see pages 120÷127
Applications see page 22

915

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH Ra	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch			N	lbs	kg/m	lbs/ft
PRIMA P	AUSTENITIC STAINLESS STEEL	P 915 K 2 ¼	P915KS/000	57,1	2.25	0,3	NO	8500	1,913	2,00	1.34
		P 915 K 2 ½	P915KR/000	63,5	2.50	0,3	NO	8500	1,913	2,14	1.44
		P 915 K 2 ⅝	P915KC/000	66,7	2.63	0,3	NO	8500	1,913	2,21	1.49
		P 915 K 3 ¼	P915KD/000	82,6	3.25	0,3	YES	8500	1,913	2,57	1.72
		P 915 K 83,8	P915KRA/000	83,8	3.30	0,3	YES	8500	1,913	2,60	1.75
		P 915 K 3 ½	P915KE/000	88,9	3.50	0,3	NO	8500	1,913	2,71	1.82
		P 915 K 4	P915KF/000	101,6	4.00	0,3	NO	8500	1,913	2,99	2.00
		P 915 K 4 ½	P915KG/000	114,3	4.50	0,3	NO	8500	1,913	3,28	2.20
		P 915 K 6	P915KH/000	152,4	6.00	0,3	NO	8500	1,913	4,13	2.78
		P 915 K 7 ½	P915KL/000	190,5	7.50	0,3	NO	8500	1,913	4,99	3.35

PHD 915


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH Ra	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	Inch			N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	XPHD 915 K 3 ¼	XPHD915KD/000	82,6	3.25	0,2	YES	8500	1,913	2,57	1.72
		XPHD 915 K 83,8	XPHD915KRA/000	83,8	3.30	0,2	YES	8500	1,913	2,60	1.75
		PHD 915 K 4 ½	PHD915KG/000	114,3	4.50	0,3	NO	8500	1,913	3,28	2.20
		PHD 915 K 7 ½	PHD915KL/000	190,5	7.50	0,3	NO	8500	1,913	4,99	3.35

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SINGLE HINGE
REDUCED PLATE GAP (1,6 mm)
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 42 mm (1.654")



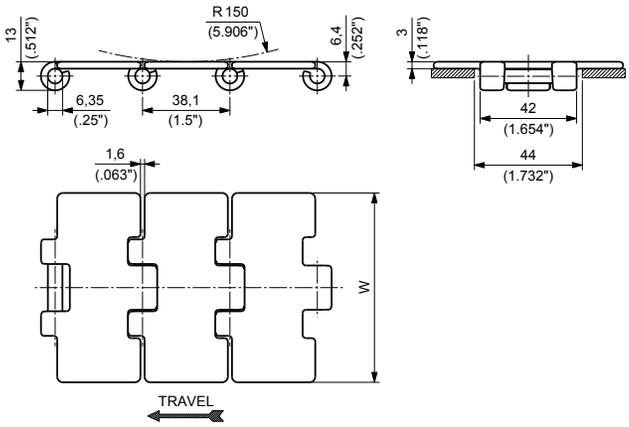


Materials see page 14
Sprockets see pages 120÷127
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		N	lbs	kg/m	lbs/ft
CARBON STEEL S	CASE HARDENED STEEL	S 915 K 3 ¼	S915KD/000	82,6	3.25	-	NO	12300	2,765	2,58	1.73
		S 915 K 4	S915KF/000	101,6	4.00	-	NO	12300	2,765	3,01	2.02
		S 915 K 4 ½	S915KG/000	114,3	4.50	-	NO	12300	2,765	3,30	2.22
		S 915 K 6	S915KH/000	152,4	6.00	-	NO	12300	2,765	4,15	2.79
		S 915 K 7 ½	S915KL/000	190,5	7.50	-	NO	12300	2,765	5,02	3.38
FERRITIC STAINLESS STEEL SS-4	AUSTENITIC STAINLESS STEEL	SS 915-4 K 3 ¼	SS915-4KD/000	82,6	3.25	0,3	NO	5800	1,304	2,52	1.69
		SS 915-4 K 83,8	SS915-4KRA/000	83,8	3.30	0,3	NO	5800	1,304	2,55	1.71
		SS 915-4 K 4 ½	SS915-4KG/000	114,3	4.50	0,3	NO	5800	1,304	3,21	2.16
		SS 915-4 K 7 ½	SS915-4KL/000	190,5	7.50	0,3	NO	5800	1,304	4,96	3.33
AUSTENITIC STAINLESS STEEL SS	AUSTENITIC STAINLESS STEEL	SS 915 K 3 ¼	SS915KD/000	82,6	3.25	0,3	NO	5600	1,259	2,57	1.72
		SS 915 K 4	SS915KF/000	101,6	4.00	0,3	NO	5600	1,259	2,99	2.01
		SS 915 K 4 ½	SS915KG/000	114,3	4.50	0,3	NO	5600	1,259	3,28	2.20
		SS 915 K 6	SS915KH/000	152,4	6.00	0,3	NO	5600	1,259	4,13	2.78
		SS 915 K 7 ½	SS915KL/000	190,5	7.50	0,3	NO	5600	1,259	4,99	3.35

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

DOUBLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 80 mm (3.150")

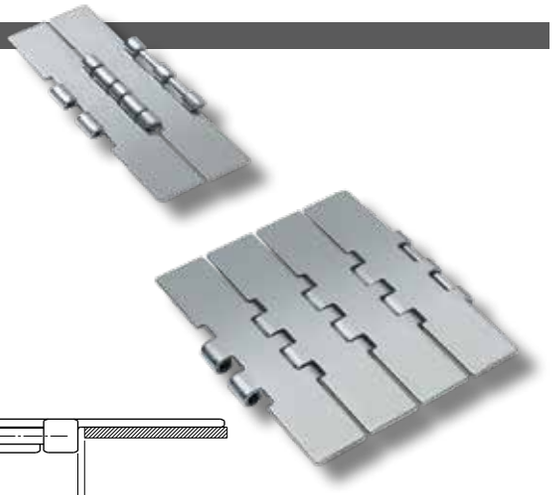

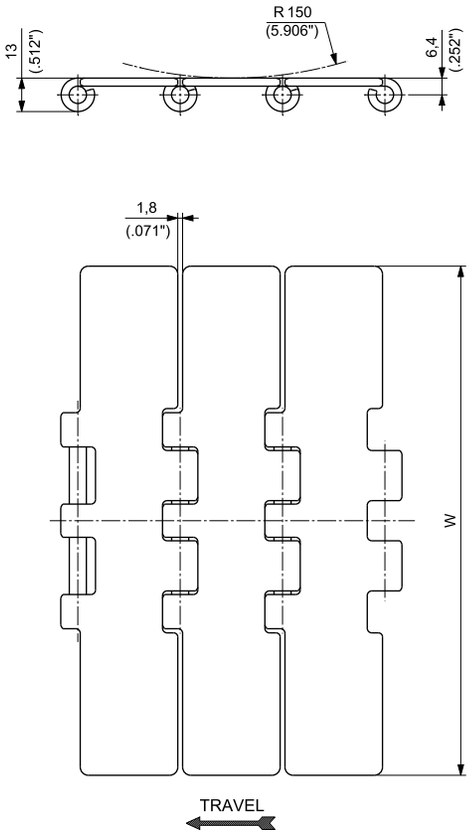


Materials see page 14
Sprockets see pages 128÷131
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		N	lbs	kg/m	lbs/ft
CARBON STEEL S	CASE HARDENED STEEL	S 2815 K 7 ½	S2815KL/000	190,5	7.50	0,3	NO	18000	4,046	5,56	3.73
FERRITIC STAINLESS STEEL SS-4	AUSTENITIC STAINLESS STEEL	SS 2815-4 K 7 ½	SS28154KL/000	190,5	7.50	0,3	NO	10300	2,315	5,58	3.75
AUSTENITIC STAINLESS STEEL SS	AUSTENITIC STAINLESS STEEL	SS 2815 K 7 ½	SS2815KL/000	190,5	7.50	0,3	NO	10600	2,383	5,61	3.77
PRIMA P	AUSTENITIC STAINLESS STEEL	P 2815 K 7 ½	P2815KL/000	190,5	7.50	0,3	NO	15000	3,372	5,60	3.75

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

DOUBLE HINGE
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 80 mm (3.150")

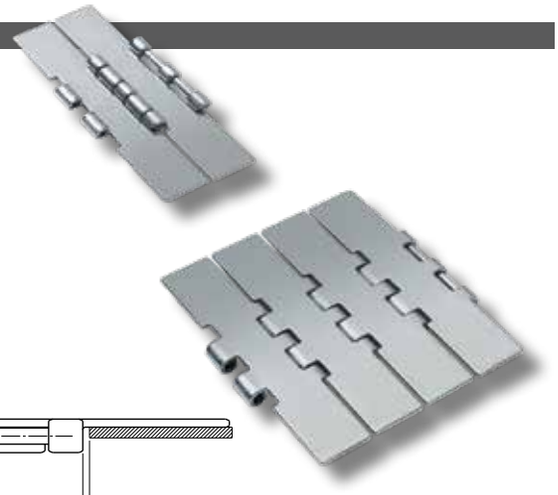

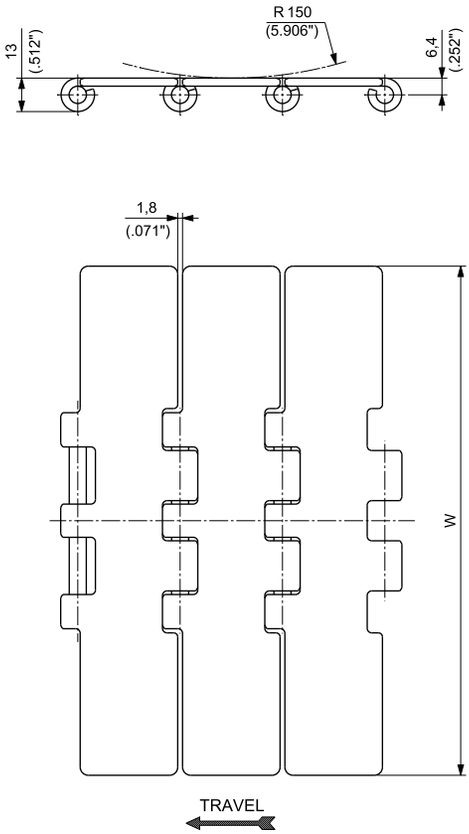

Materials see page 14
Sprockets see pages 128÷131
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	PHD 2815 K 7 ½	PHD2815KL/000	190,5	7.50	0,3	NO	15000	3,372	5,60	3.75


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

HEAVY DUTY SINGLE HINGE
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 57 mm (2.244")



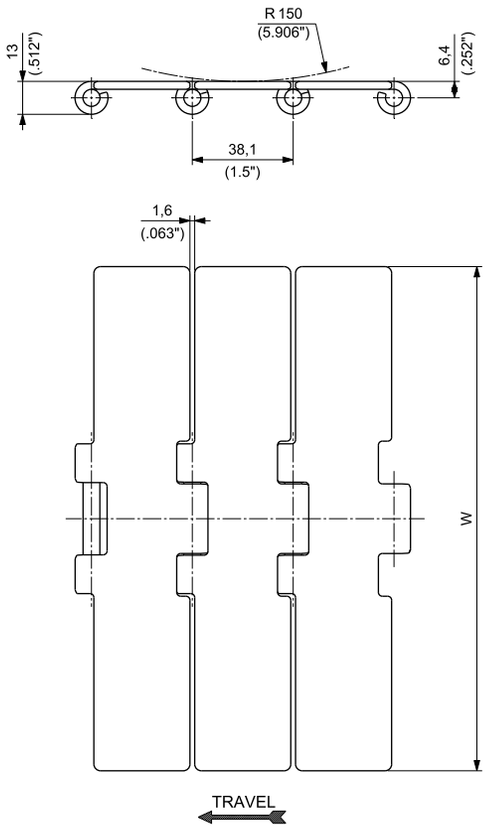

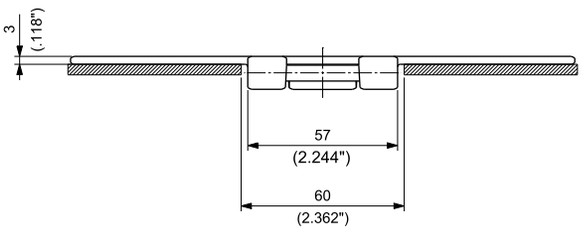

Materials see page 14
Sprockets see pages 132÷133
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	PHD 9157 K 7 ½	PHD9157KL/000	190,5	7.50	0,3	NO	10500	2,360	5,28	3.55

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MINI HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 22 mm (0.866")



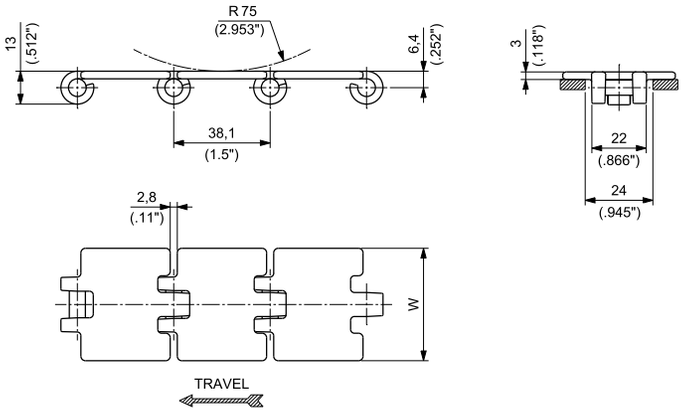

Materials see page 14
Sprockets see pages 134÷136
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		N	lbs	kg/m	lbs/ft
PRIMA P	AUSTENITIC STAINLESS STEEL	P 803 K 1 ¼	P803KPA/000	31,8	1.25	0,3	NO	4100	922	1,06	0.71
		P 803 K 1 ¾	P803KFA/000	44,5	1.75	0,3	NO	4100	922	1,33	0.90


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BEVEL
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 43 mm (1.693")



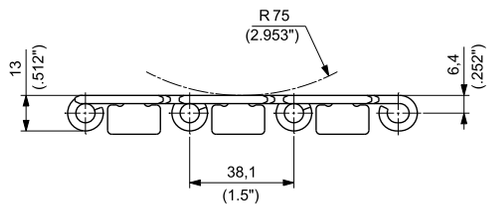

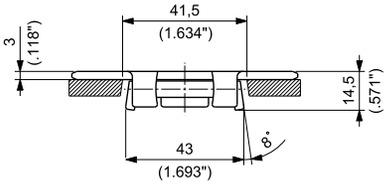

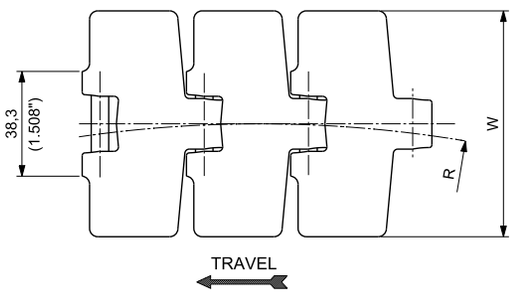

Materials see page 14
Sprockets see pages 135÷138
Corner tracks see page 347
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CASE HARDENED STEEL	S 881 K 3 ¼	S881KD/000	82,6	3.25	-	NO	457,2	18	11600	2,608	2,74	1.84
		S 881 K 4 ½	S881KG/000	114,3	4.50	-	NO	609,6	24	11600	2,608	3,37	2.27
		S 881 K 7 ½	S881KL/000	190,5	7.50	-	NO	609,6	24	11600	2,608	3,78	2.54
AUSTENITIC STAINLESS STEEL SS	AUSTENITIC STAINLESS STEEL	SS 881 K 3 ¼	SS881KD/000	82,6	3.25	0,3	NO	457,2	18	5600	1,259	2,76	1.85
		SS 881 K 4 ½	SS881KG/000	114,3	4.50	0,3	NO	609,6	24	5600	1,259	3,40	2.29
		SS 881 K 7 ½	SS881KL/000	190,5	7.50	0,3	NO	609,6	24	5600	1,259	4,82	3.24

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BEVEL
REDUCED PLATE GAP
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 43 mm (1.693")



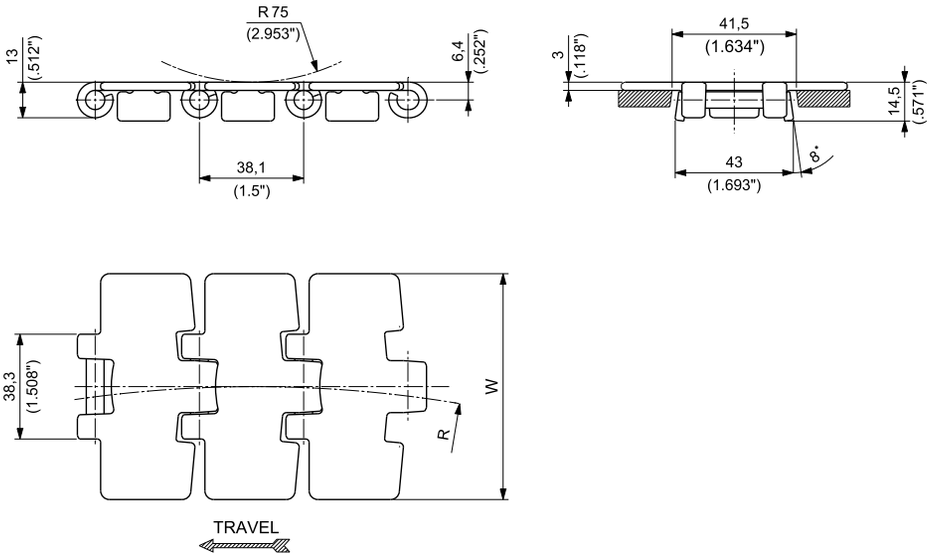

Materials see page 14
Sprockets see pages 135÷138
Corner tracks see page 347
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	AUSTENITIC STAINLESS STEEL	P 981 K 3 ¼	P981KD/000	82,6	3.25	0,3	NO	457,2	18	8000	1,798	2,74	1.84
		P 981 K 83,8	P981KRA/000	83,8	3.30	0,3	NO	457,2	18	8000	1,798	2,77	1.86
		P 981 K 4 ½	P981KG/000	114,3	4.50	0,3	NO	609,6	24	8000	1,798	3,38	2.27
		P 981 K 7 ½	P981KL/000	190,5	7.50	0,3	NO	609,6	24	8000	1,798	4,82	3.24


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 43 mm (1.693")



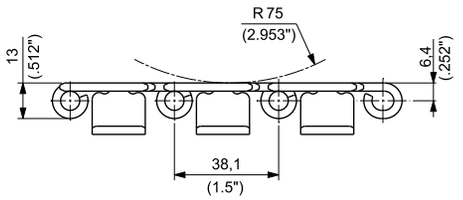

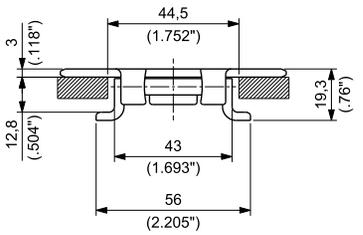

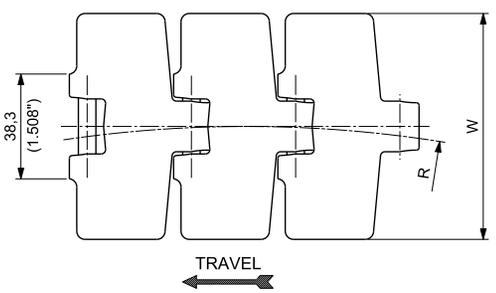

Materials see page 14
Sprockets see pages 135÷140
Corner tracks see page 342
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CASE HARDENED STEEL	S 881T K 3 ¼	S881TKD/000	82,6	3.25	-	NO	457,2	18	11600	2,608	2,96	1.99
		S 881T K 4 ½	S881TKG/000	114,3	4.50	-	NO	609,6	24	11600	2,608	3,60	2.42
		S 881T K 7 ½	S881TKL/000	190,5	7.50	-	NO	609,6	24	11600	2,608	5,01	3.36
AUSTENITIC STAINLESS STEEL SS	AUSTENITIC STAINLESS STEEL	SS 881T K 3 ¼	SS881TKD/000	82,6	3.25	0,3	NO	457,2	18	5600	1,259	2,99	2.01
		SS 881T K 4 ½	SS881TKG/000	114,3	4.50	0,3	NO	609,6	24	5600	1,259	3,63	2.44
		SS 881T K 7 ½	SS881TKL/000	190,5	7.50	0,3	NO	609,6	24	5600	1,259	5,05	3.39

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
REDUCED PLATE GAP
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 43 mm (1.693")



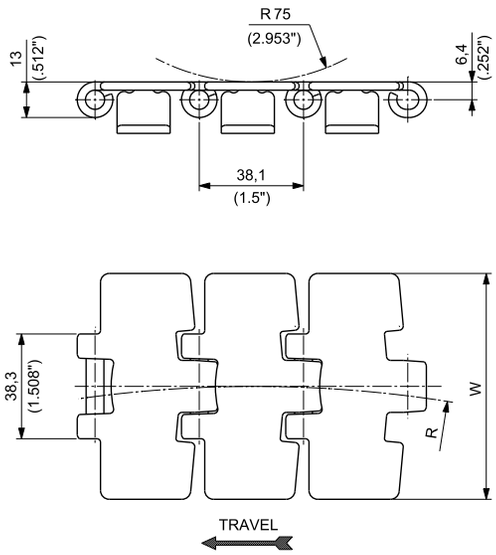

Materials see page 14
Sprockets see pages 135÷140
Corner tracks see page 342
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	AUSTENITIC STAINLESS STEEL	P 981T K 3 ¼	P981TKD/000	82,6	3.25	0,3	NO	457,2	18	8000	1,798	2,97	2.00
		P 981T K 83,8	P981TKRA/000	83,8	3.30	0,3	NO	457,2	18	8000	1,798	2,99	2.01
		P 981T K 4 ½	P981TKG/000	114,3	4.50	0,3	NO	609,6	24	8000	1,798	3,61	2.43
		P 981T K 7 ½	P981TKL/000	190,5	7.50	0,3	NO	609,6	24	8000	1,798	5,05	3.40

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MAGNETIC
REDUCED PLATE GAP
INCREASED PIN HARDNESS (PHD 981M SERIES)
SPECIAL XPHD CHAINS FOR PRESSURELESS COMBINERS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 42 mm (1.654")



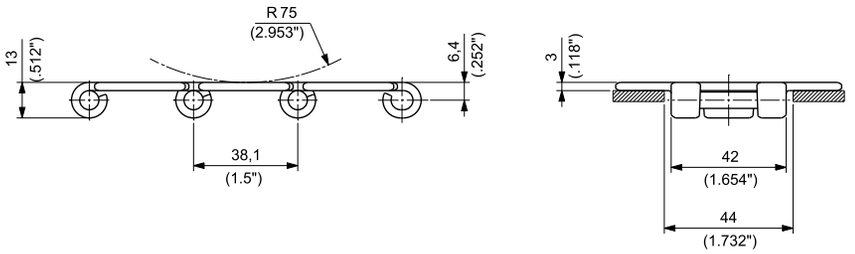

Materials see page 14
Sprockets see pages 120÷127
Corner tracks see page 301
Applications see page 22

981M

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
FERRITIC STAINLESS STEEL SS-4	AUSTENITIC STAINLESS STEEL	SS 981M-4 K 3 ¼	SS981M4KD/000	82,6	3.25	0,3	YES	500	19.69	5400	1,214	2,43	1.63
		SS 981M-4 K 83,8	SS981M4KRA/000	83,8	3.30	0,3	YES	500	19.69	5400	1,214	2,45	1.63
		SS 981M-4 K 4 ½	SS981M4KG/000	114,3	4.50	0,3	YES	500	19.69	5400	1,214	3,05	2.05
		SS 981M-4 K 7 ½	SS981M4KL/000	190,5	7.50	0,3	YES	500	19.69	5400	1,214	4,43	2.98
PRIMA P	AUSTENITIC STAINLESS STEEL	P 981M K 3 ¼	P981MKD/000	82,6	3.25	0,3	YES	500	19.69	8500	1,911	2,44	1.64
		P 981M K 83,8	P981MKRA/000	83,8	3.30	0,3	YES	500	19.69	8500	1,911	2,47	1.66
		P 981M K 4 ½	P981MKG/000	114,3	4.50	0,3	YES	500	19.69	8500	1,911	3,07	2.06
		P 981M K 7 ½	P981MKL/000	190,5	7.50	0,3	YES	500	19.69	8500	1,911	4,47	3.01

PHD 981M


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	XPHD 981M K 3 ¼	XPHD981MKD/000	82,6	3.25	0,2	YES	500	19.69	8500	1,911	2,44	1.64
		XPHD 981M K 83,8	XPHD981MKRA/000	83,8	3.30	0,2	YES	500	19.69	8500	1,911	2,47	1.66
		PHD 981M K 4 ½	PHD981MKG/000	114,3	4.50	0,3	YES	500	19.69	8500	1,911	3,07	2.06
		PHD 981M K 7 ½	PHD981MKL/000	190,5	7.50	0,3	YES	500	19.69	8500	1,911	4,47	3.01


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved



MAGNETIC
HEAVY DUTY SINGLE HINGE
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 57 mm (2.244")

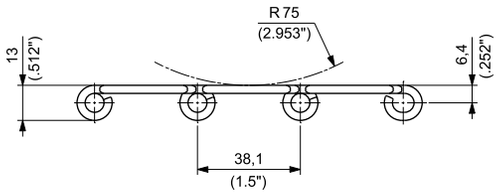

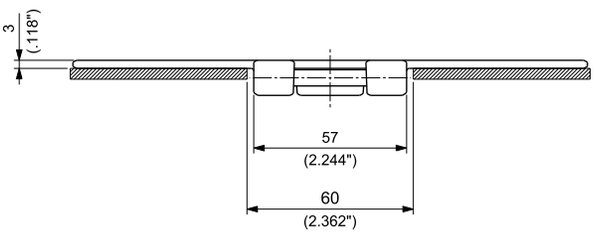

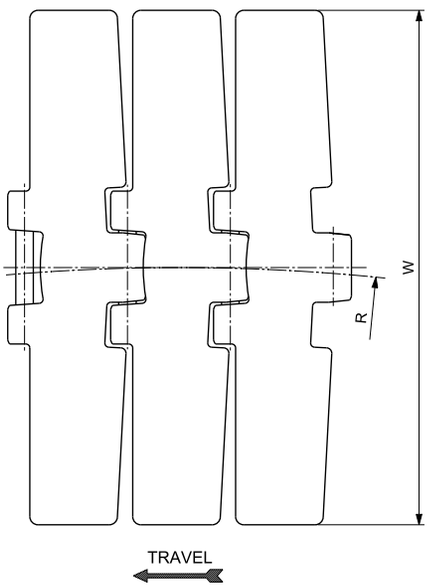

Materials see page 14
Sprockets see pages 132÷133
Corner tracks see page 301
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	PHD 9857M K 7 ½	PHD9857MKL/000	190,5	7.50	0,3	YES	750	29.53	10500	2,360	4,97	3.34


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
REDUCED SIDEFLEXING RADIUS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 43 mm (1.693")



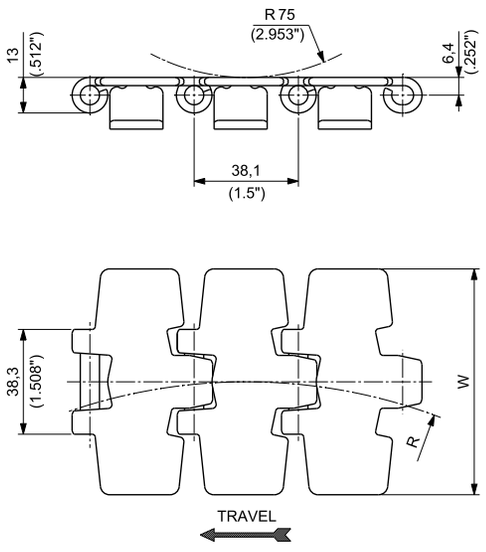

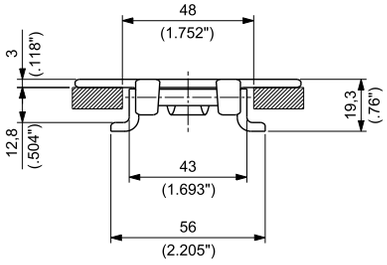

Materials see page 14
Sprockets see pages 135÷140
Corner tracks see page 342
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SURFACE FINISH	POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin			mm	inch	Ra		mm	inch	N	lbs	kg/m	lbs/ft
AUSTENITIC STAINLESS STEEL SS	AUSTENITIC STAINLESS STEEL	SS 982T K 3 ¼	SS982TKD/000	82,6	3.25	0,3	NO	200	7.87	5000	1,125	3,00	2.02

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

Rubberized Surface Steel Chains








STRAIGHT RUNNING RUBBERIZED SURFACE STEEL CHAINS - **PHDG 915 SERIES**




SINGLE HINGE
PLATE GAP 1,6 mm
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 42 mm (1.654")

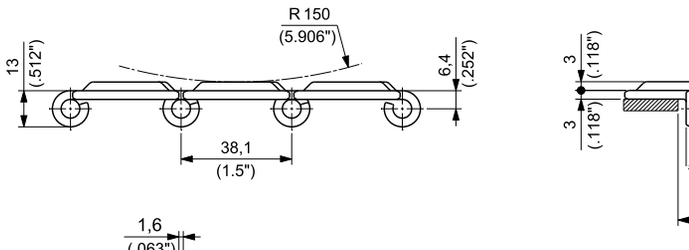





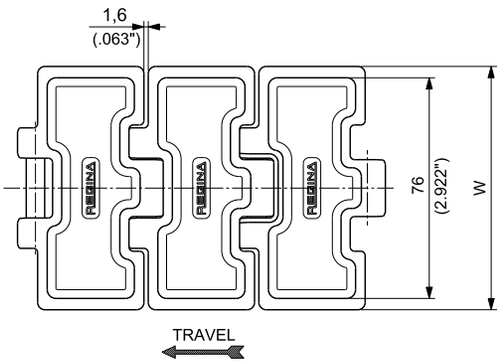

K3¼ - K4½

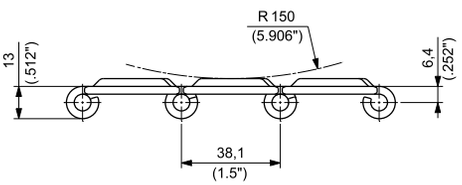

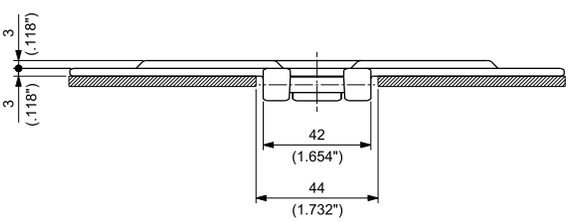

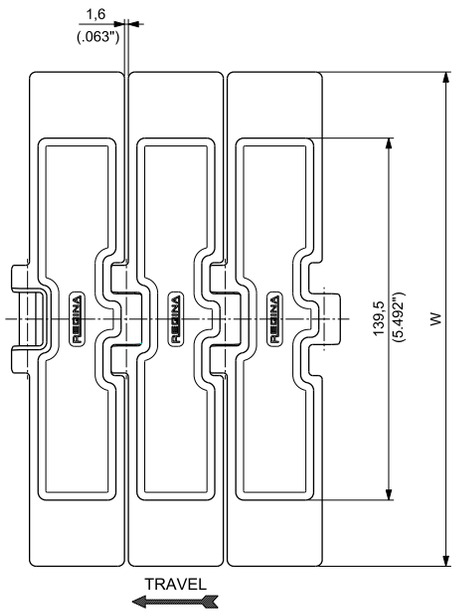

K 7 ½


Materials see page 14
Sprockets see pages 120÷127
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin	Rubber			mm	inch		N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	NBR Hardness: 70 ShA	PHDG 915 K 3 ¼	PHDG915KD/000	82,6	3.25	YES	8500	1,911	2,57	1.73
			PHDG 915 K 4 ½	PHDG915KG/000	114,3	4.50	NO	8500	1,911	3,28	2.20
			PHDG 915 K 7 ½	PHDG915KL/000	190,5	7.50	NO	8500	1,911	4,99	3.35

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

DOUBLE HINGE
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 80 mm (3.150")

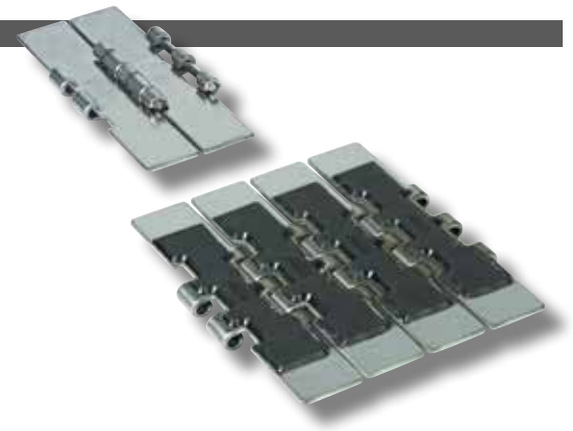

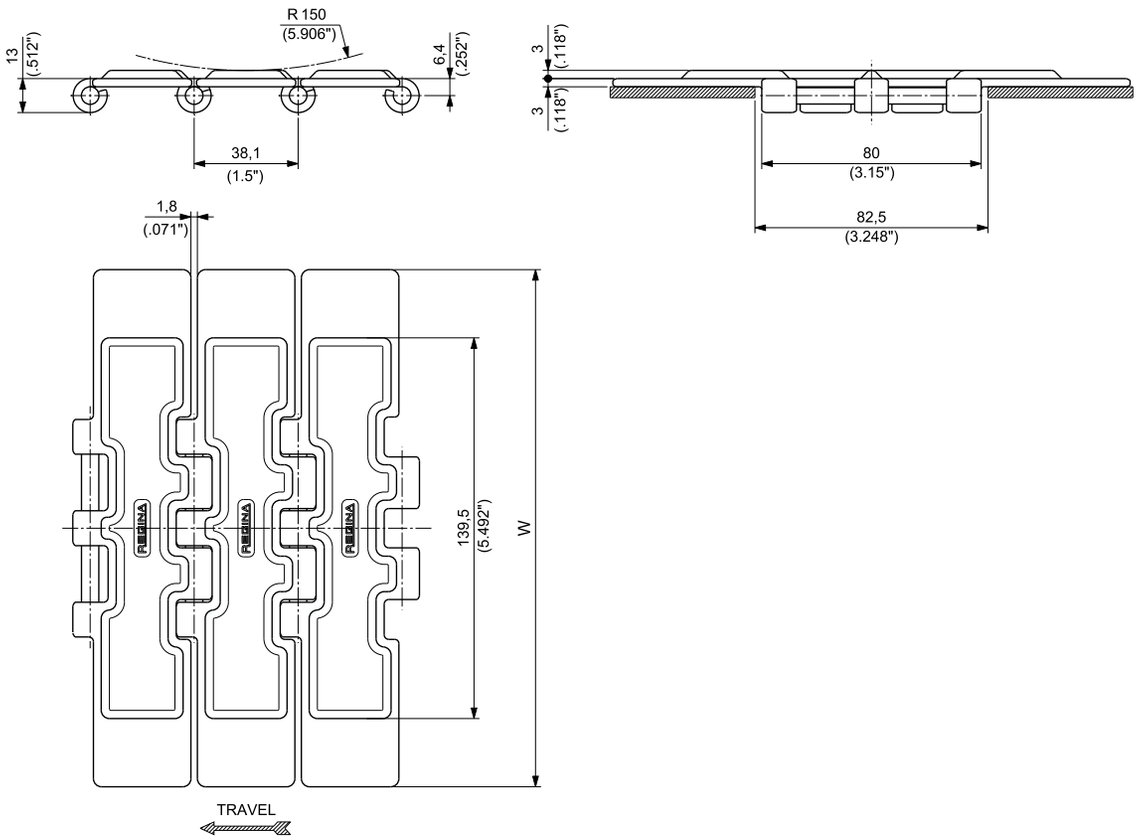

Materials see page 14
Sprockets see pages 128÷131
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin	Rubber			mm	inch		N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	**NBR** Hardness: 70 ShA	PHDG 2815 K 7 ½	PHDG2815KL/000	190,5	7.50	NO	15000	3,372	5,60	3.75

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

HEAVY DUTY SINGLE HINGE
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 57 mm (2.244")



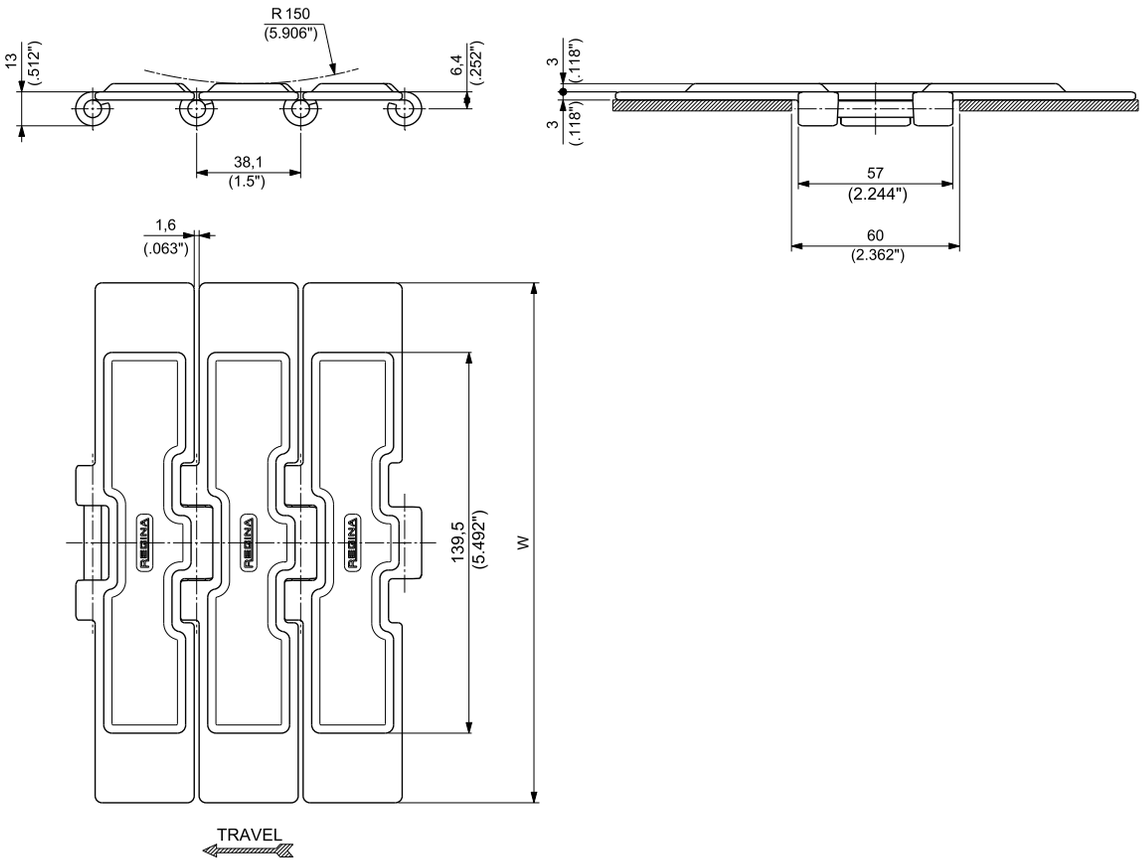


Materials see page 14
Sprockets see pages 132÷133
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		POLISHED HINGES	YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin	Rubber			mm	inch		N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	**NBR** Hardness: 70 ShA	PHDG 9157 K 7 ½	PHDG9157KL/000	190,5	7.50	NO	10500	2,360	5,28	3.55

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
REDUCED PLATE GAP
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 43 mm (1.693")

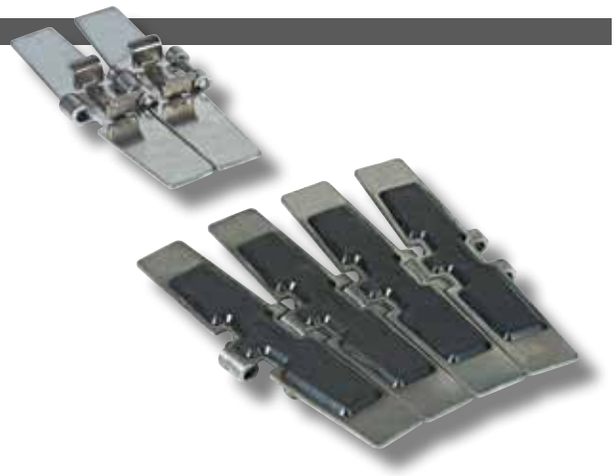

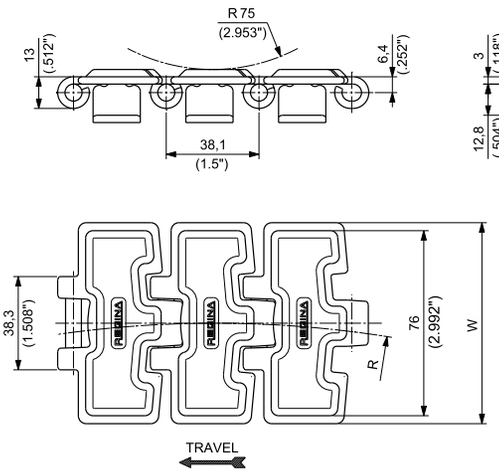

K 3¼

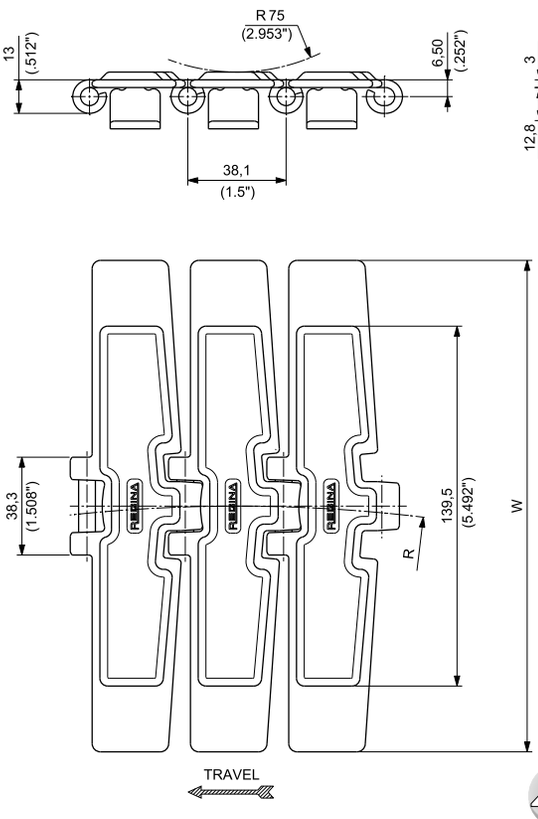


K 7 ½

Materials see page 14
Sprockets see pages 135÷140
Corner tracks see page 342
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin	Rubber			mm	inch		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	NBR Hardness: 70 ShA	PHDG 981T K 3 ¼	PHDG981TKD/0000	82,6	3.25	NO	457,2	18	8000	1,798	2,97	2.00
			PHDG 981T K 7 ½	PHDG981TKL/000	190,5	7.50	NO	609,6	24	8000	1,798	5,06	3.40


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

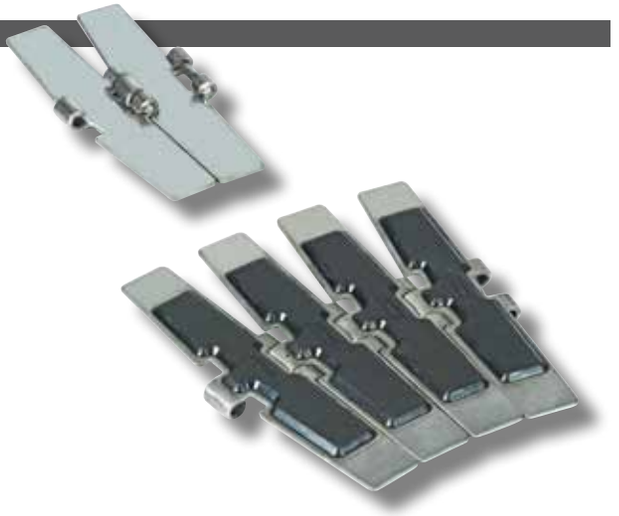

MAGNETIC
REDUCED PLATE GAP
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 42 mm (1.654")

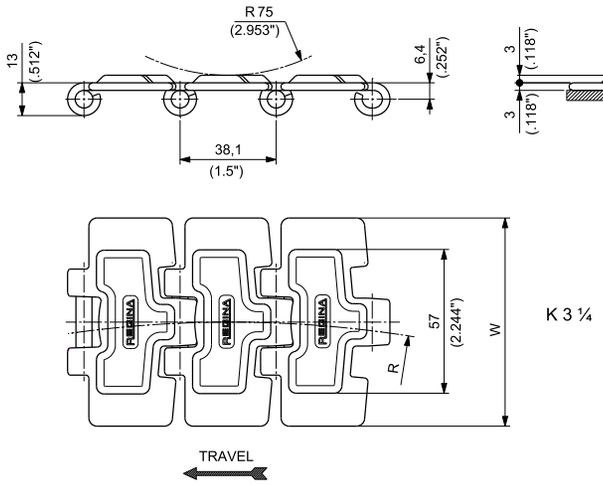

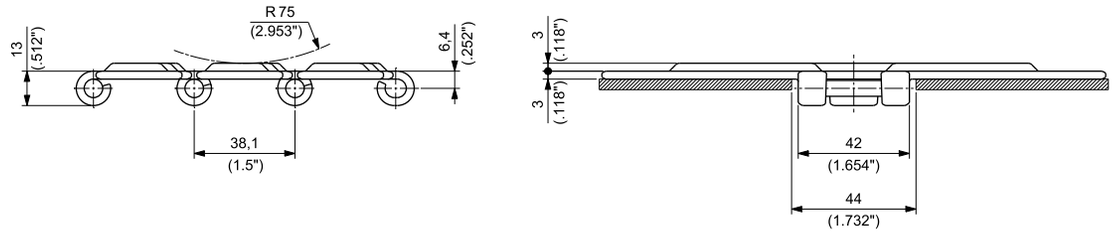

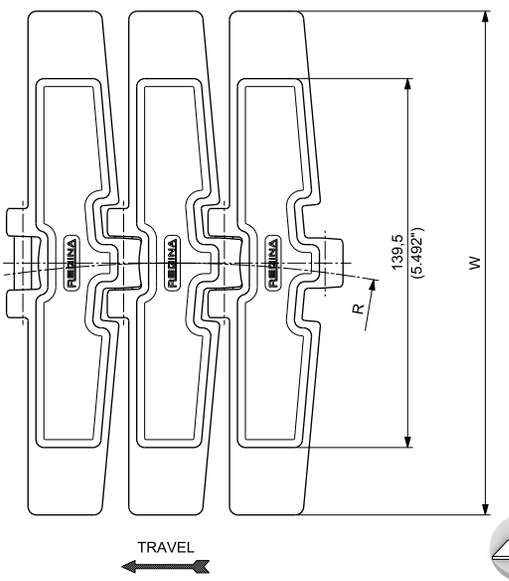

Materials see page 14
Sprockets see pages 120÷127
Corner tracks see page 301
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin	Rubber			mm	inch		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	NBR Hardness: 70 ShA	PHDG 981M K 3 ¼	PHDG981MKD/000	82,6	3.25	YES	500	19,69	8500	1,911	2,45	1.65
			PHDG 981M K 7 ½	PHDG981MKL/000	190,5	7.50	YES	500	19,69	8500	1,911	4,47	3.01


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MAGNETIC
HEAVY DUTY SINGLE HINGE
INCREASED PIN HARDNESS
PITCH 1 ½" (38,1 mm)
THICKNESS 3 mm (0.118")
HINGE 57 mm (2.244")



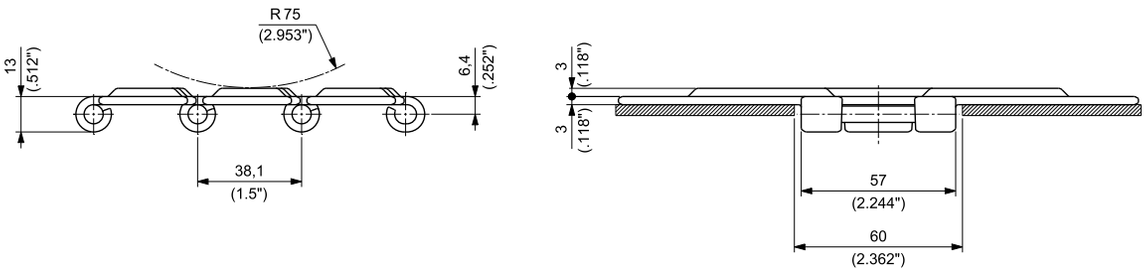

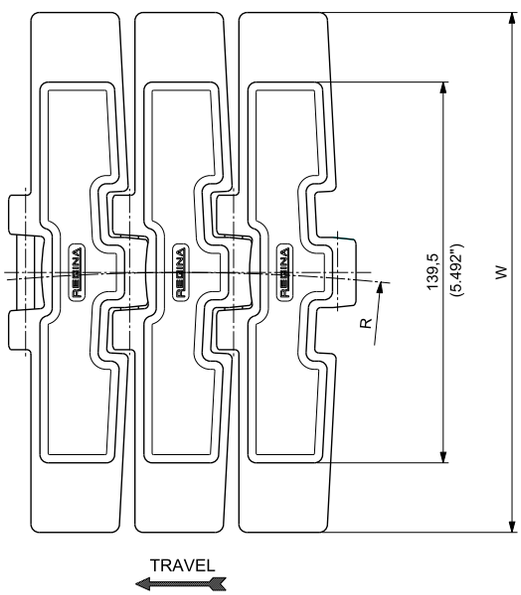

Materials see page 14
Sprockets see pages 132÷133
Corner tracks see pages 301
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		POLISHED HINGES	SIDEFLEXING RADIUS R		YIELD LOAD AVERAGE		WEIGHT	
Plate	Pin	Rubber			mm	inch		mm	inch	N	lbs	kg/m	lbs/ft
PRIMA P	HARDENED MARTENSITIC STAINLESS STEEL	NBR Hardness: 70 ShA	PHDG 9857M K 7 ½	PHDG9857MKL/000	190,5	7.50	YES	750	29,53	10500	2,360	4,97	3.34

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

Plastic Chains



INDUSTRIES AND APPLICATIONS

PLASTIC CHAINS

Suitable for handling plastic and glass bottles, aluminum and steel cans. These products can be loose or packaged.

INDUSTRIES

Bottling and canning
Food filling
Container manufacturing
Pharmaceutical
Paper/cardboard
Glass manufacturing
Consumer goods

APPLICATIONS

Depallettizer
Pressureless Inliners and Combiners
Single lane and Mass conveyors
Accumulation tables
Infeed / outfeed packaging machines
Packaged product convey









FEATURES

- Highest standard of flatness thanks to the outperforming moulding process.
- Complete range of materials available, specifically defined for each type of application.
- DK2™ material available, developed with DuPont® with Kevlar® fiber inside.
  Lower Friction and maximum wear resistance are the superior properties of this material, allowing greater chain life, cost saving and environmental protection.
- e-F.A.S.T.™ material available, developed with DuPont®.
  Capable of exceeding such standards, thanks to its unique characteristic of delivering a much lower and constant coefficent of friction over time in dry or almost dry running conditions vs. other plastic chains.
- Equipped with austenitic stainless steel pins (except for the magnetic chain) to achieve the maximum corrosion resistance.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SINGLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 41,6 mm (1.638")




DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

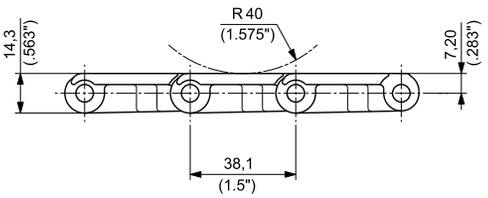



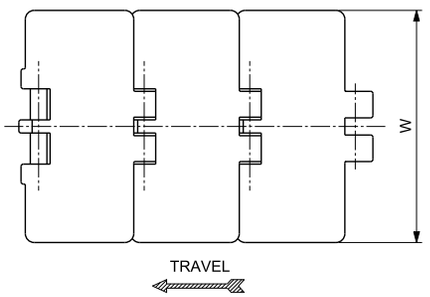

Materials see page 14

Sprockets see pages 141÷144

Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 820 K 3 ¼	UP820KD/000	82,6	3.25	4,0	0.16	1600	360	0,87	0.58
		UP 820 K 83,8	UP820KRA/000	83,8	3.30	4,0	0.16	1600	360	0,88	0.59
		UP 820 K 4	UP820KF/000	101,6	4.00	4,0	0.16	1600	360	0,95	0.64
		UP 820 K 4 ½	UP820KG/000	114,3	4.50	4,0	0.16	1600	360	1,03	0.69
		UP 820 K 6	UP820KH/000	152,4	6.00	4,0	0.16	1600	360	1,25	0.84
		UP 820 K 7 ½	UP820KL/000	190,5	7.50	4,0	0.16	1600	360	1,35	0.90
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKE2™	AUSTENITIC STAINLESS STEEL	D2K 820 K 3 ¼	D2K820KD/000	82,6	3.25	4,0	0.16	1600	360	0,85	0.57
		D2K 820 K 83,8	D2K820KRA/000	83,8	3.30	4,0	0.16	1600	360	0,86	0.58
		D2K 820 K 4 ½	D2K820KG/000	114,3	4.50	4,0	0.16	1600	360	1,00	0.67
		D2K 820 K 7 ½	D2K820KL/000	190,5	7.50	4,0	0.16	1600	360	1,36	0.90
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	AUSTENITIC STAINLESS STEEL	EF 820 K 3 ¼	EF820KD/000	82,6	3.25	4,0	0.16	1600	360	0,85	0.57
		EF 820 K 83,8	EF820KRA/000	83,8	3.30	4,0	0.16	1600	360	0,86	0.58
		EF 820 K 4 ½	EF820KG/000	114,3	4.50	4,0	0.16	1600	360	1,00	0.67
ABRASION RESISTANT POLYAMIDE[1] AR	AUSTENITIC STAINLESS STEEL	AR 820 K 3 ¼	AR820KD/000	82,6	3.25	4,0	0.16	1600	360	0,85	0.57
		AR 820 K 4 ½	AR820KG/000	114,3	4.50	4,0	0.16	1600	360	0,98	0.66

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REINFORCED SINGLE HINGE
REDUCED PLATE GAP
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 42 mm (1.654")



DUPONT® KEVLAR® INSIDE

e-F.A.S.T. ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

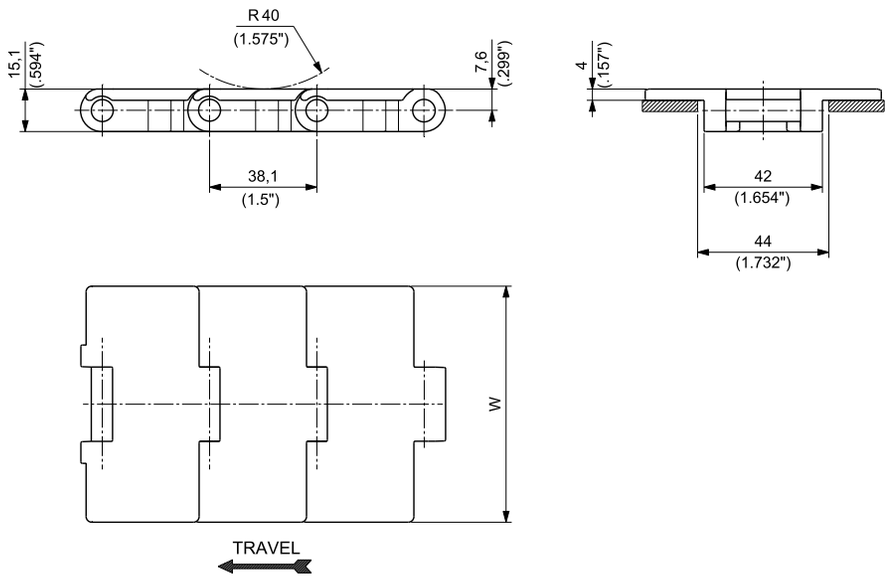

Materials see page 14
Sprockets see pages 147÷148
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	STAINLESS STEEL	UP 828 K 3 ¼	UP828KD/000	82,6	3.25	4,0	0.16	2000	450	1,01	0.68
		UP 828 K 83,8	UP828KRA/000	83,8	3.30	4,0	0.16	2000	450	1,02	0.69
		UP 828 K 4 ½	UP828KG/000	114,3	4.50	4,0	0.16	2000	450	1,18	0.79
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	STAINLESS STEEL	D2K 828 K 3 ¼	D2K828KD/000	82,6	3.25	4,0	0.16	2000	450	1,01	0.68
		D2K 828 K 83,8	D2K828KRA/000	83,8	3.30	4,0	0.16	2000	450	1,02	0.69
		D2K 828 K 4 ½	D2K828KG/000	114,3	4.50	4,0	0.16	2000	450	1,18	0.79
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.	STAINLESS STEEL	EF 828 K 3 ¼	EF828KD/000	82,6	3.25	4,0	0.16	2000	450	1,01	0.68
		EF 828 K 83,8	EF828KRA/000	83,8	3.30	4,0	0.16	2000	450	1,02	0.69
		EF 828 K 4 ½	EF828KG/000	114,3	4.50	4,0	0.16	2000	450	1,18	0.79
ABRASION RESISTANT POLYAMIDE AR	STAINLESS STEEL	AR 828 K 3 ¼	AR828KD/000	82,6	3.25	4,0	0.16	2000	450	0,98	0.66
		AR 828 K 4 ½	AR828KG/000	114,3	4.50	4,0	0.16	2000	450	1,12	0.75

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


STRAIGHT RUNNING PLASTIC CHAINS - **831 SERIES**


SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 41,6 mm (1.638")

DK2™ DUPONT® KEVLAR® INSIDE



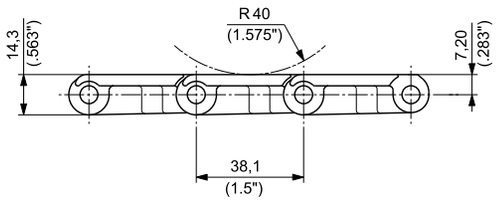



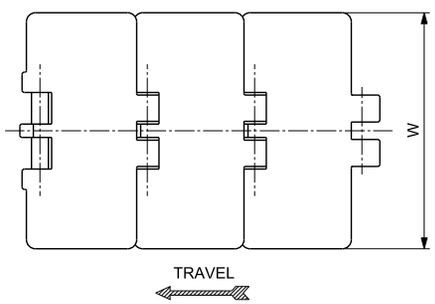

Materials see page 14
Sprockets see pages 141÷144
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 831 K 3 ¼	UP831KD/000	82,6	3.25	4,8	0.19	1600	360	0,90	0.60
		UP 831 K 83,8	UP831KRA/000	83,8	3.30	4,8	0.19	1600	360	0,91	0.61
		UP 831 K 4 ½	UP831KG/000	114,3	4.50	4,8	0.19	1600	360	1,09	0.73
		UP 831 K 7 ½	UP831KL/000	190,5	7.50	4,8	0.19	1600	360	1,51	1.01
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 831 K 3 ¼	D2K831KD/000	82,6	3.25	4,8	0.19	1600	360	0,88	0.59
		D2K 831 K 83,8	D2K831KRA/000	83,8	3.30	4,8	0.19	1600	360	0,89	0.60
		D2K 831 K 4 ½	D2K831KG/000	114,3	4.50	4,8	0.19	1600	360	1,06	0.72
		D2K 831 K 7 ½	D2K831KL/000	190,5	7.50	4,8	0.19	1600	360	1,33	0.90


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


DOUBLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 136,5 mm (5.374")



DUPONT® KEVLAR® INSIDE

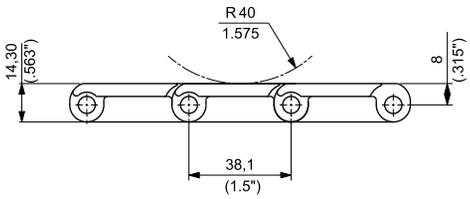

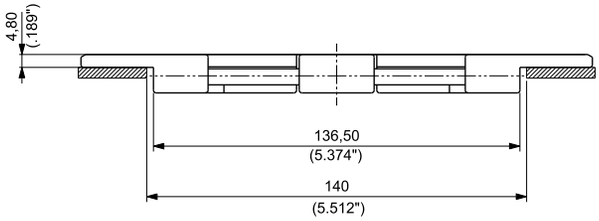

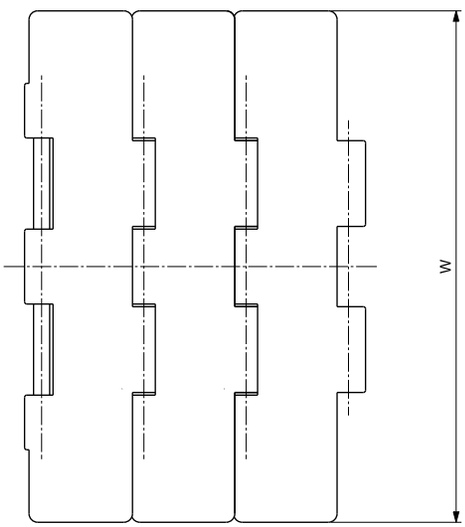

TRAVEL


Materials see page 14
Sprockets see pages 145÷146
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
		UP 821 K 7 ½	UP821KL/000	190,5	7.50	4,8	0.19	2750	618	2,48	1.67
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 821 K 10	UP821KM/000	254,0	10.00	4,8	0.19	2750	618	2,86	1.92
		UP 821 K 12	UP821KN/000	304,8	12.00	4,8	0.19	2750	618	3,16	2.12
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 821 K 7 ½	D2K821KL/000	190,5	7.50	4,8	0.19	2750	618	2,47	1.66


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

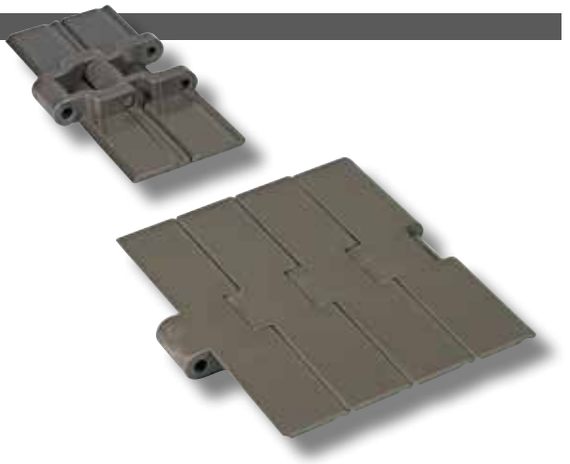

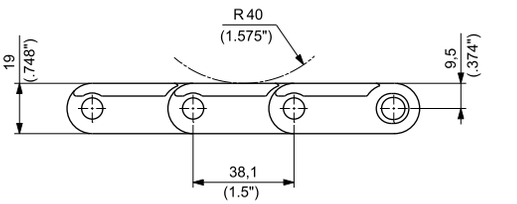

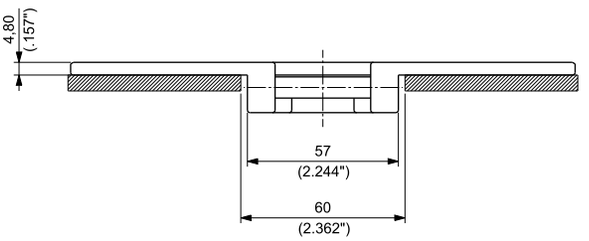

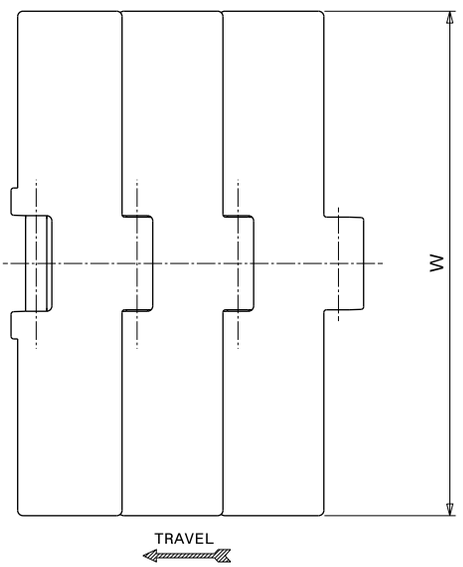

Materials see page 14
Sprockets see pages 150÷151
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	UP 8257 K 7 ½	UP8257KL/000	190,5	7.50	4,8	0.19	3910	879	2,35	1.58
		UP 8257 K 10	UP8257KM/000	254,0	10.00	4,8	0.19	3910	879	2,74	1.84
		UP 8257 K 12	UP8257KN/000	304,8	12.00	4,8	0.19	3910	879	3,06	2.06


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BEVEL
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 43 mm (1.693")



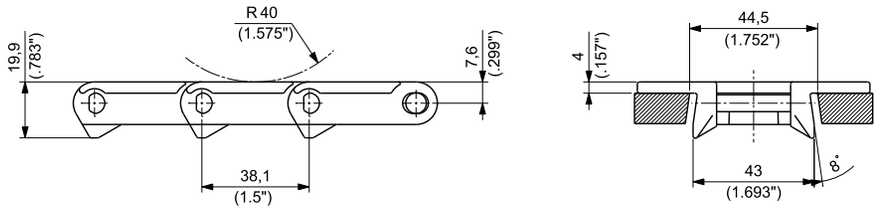

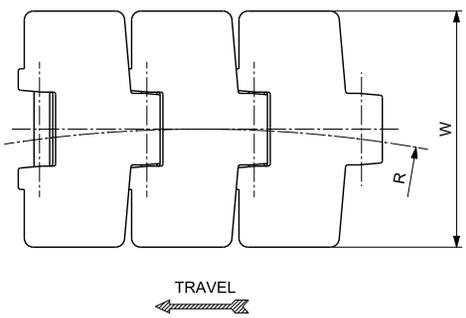

Materials see page 14
Sprockets see pages 147÷148
Corner tracks see page 347
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	UP 880 K 3 ¼	UP880KD/000	82,6	3.25	4,0	0.16	457,2	18.00	2000	450	0,90	0.61
		UP 880 K 4 ½	UP880KG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1.06	0.71
ABRASION RESISTANT POLYAMIDE[1] **AR**	AUSTENITIC STAINLESS STEEL	AR 880 K 3 ¼	AR880KD/000	82,6	3.25	4,0	0.16	457,2	18.00	2000	450	0,76	0.51
		AR 880 K 4 ½	AR880KG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,04	0.70

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SIDEFLEXING PLASTIC CHAINS - **880T SERIES**


TAB
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 42,9 mm (1.689")


DUPONT® KEVLAR® INSIDE

e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMO-PLASTIC



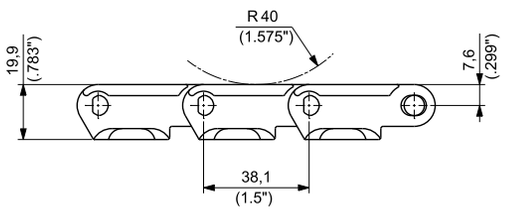



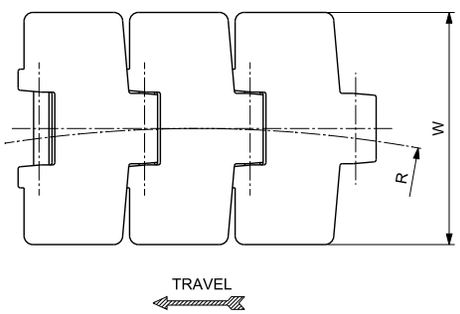

Materials see page 14
Sprockets see pages 147÷149
Corner tracks see page 342
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	UP 880T K 3 ¼	UP880TKD/000	82,6	3.25	4,0	0.16	457,2	18.00	2000	450	1,05	0.71
		UP 880T K 83,8	UP880TKRA/000	83,8	3.30	4,0	0.16	457,2	18.00	2000	450	1,06	0.71
		UP 880T K 4 ½	UP880TKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,24	0.83
SPECIAL DELRIN® REINFORCED WITH KEVLAR® DKF™	AUSTENITIC STAINLESS STEEL	D2K 880T K 3 ¼	D2K880TKD/000	82,6	3.25	4,0	0.16	457,2	18.00	2000	450	1,03	0.69
		D2K 880T K 83,8	D2K880TKRA/000	83,8	3.30	4,0	0.16	457,2	18.00	2000	450	1,04	0.70
		D2K 880T K 4 ½	D2K880TKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,22	0.82
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	AUSTENITIC STAINLESS STEEL	EF 880T K 3 ¼	EF880TKD/000	82,6	3.25	4,0	0.16	457,2	18.00	2000	450	1,03	0.69
		EF 880T K 83,8	EF880TKRA/000	83,8	3.30	4,0	0.16	457,2	18.00	2000	450	1,04	0.70
		EF 880T K 4 ½	EF880TKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,22	0.82
ABRASION RESISTANT POLYAMIDE[1] AR	AUSTENITIC STAINLESS STEEL	AR 880T K 3 ¼	AR880TKD/000	82,6	3.25	4,0	0.16	457,2	18.00	2000	450	0,89	0.60
		AR 880T K 4 ½	AR880TKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,02	0.69

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


MAGNETIC
REDUCED PLATE GAP
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 42 mm (1.654")


DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

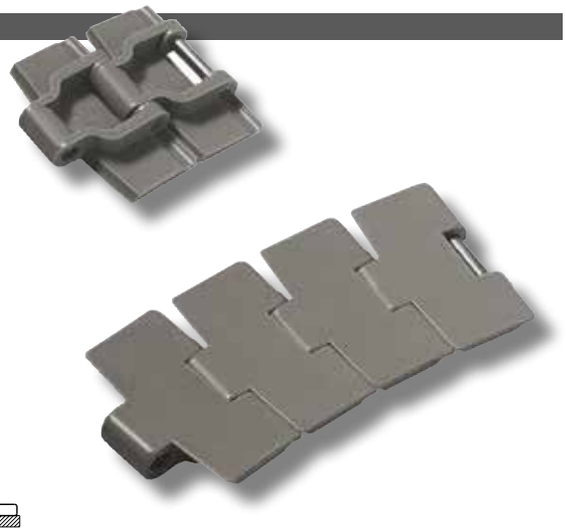

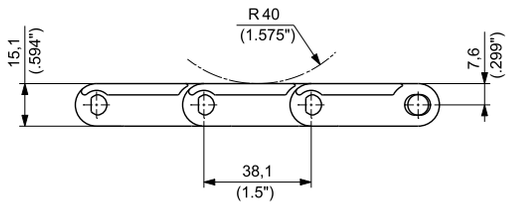



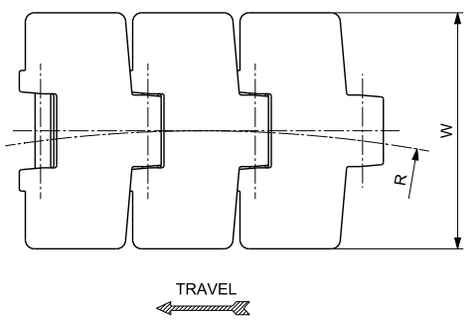

Materials see page 14
Sprockets see pages 147÷148
Corner tracks see pages 301
Applications see page 22

MATERIALS Plate	MATERIALS Pin	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	SIDEFLEXING RADIUS R mm	SIDEFLEXING RADIUS R inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	MAGNETIC STAINLESS STEEL	UP 880M RG K 3 ¼	UP880MRGKD/000	82,6	3.25	4,0	0.16	500,0	19.69	2000	450	0,98	0.66
		UP 880M RG K 83,8	UP880MRGKRA/000	83,8	3.30	4,0	0.16	500,0	19.69	2000	450	0,99	0.67
		UP 880M RG K 4 ½	UP880MRGKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,12	0.75
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	MAGNETIC STAINLESS STEEL	D2K 880M RG K 3 ¼	D2K880MRGKD/000	82,6	3.25	4,0	0.16	500,0	19.69	2000	450	0,97	0.65
		D2K 880M RG K 83,8	D2K880MRGKRA/000	83,8	3.30	4,0	0.16	500,0	19.69	2000	450	0,98	0.66
		D2K 880M RG K 4 ½	D2K880MRGKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,12	0.75
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	MAGNETIC STAINLESS STEEL	EF 880M RG K 3 ¼	EF880MRGKD/000	82,6	3.25	4,0	0.16	500,0	19.69	2000	450	0,97	0.65
		EF 880M RG K 83,8	EF880MRGKRA/000	83,8	3.30	4,0	0.16	500,0	19.69	2000	450	0,98	0.66
		EF 880M RG K 4 ½	EF880MRGKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,12	0.75
ABRASION RESISTANT POLYAMIDE[1] AR	MAGNETIC STAINLESS STEEL	AR 880M RG K 4 ½	AR880MRGKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2000	450	1,08	0.73


[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BEVEL
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.188")
HINGE 43 mm (1.693")



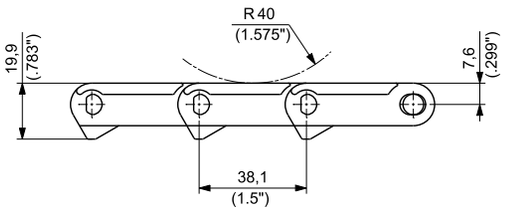



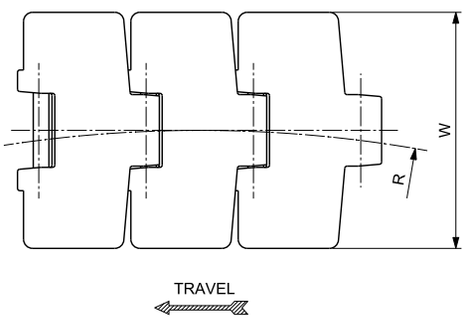

Materials see page 14
Sprockets see pages 147÷148
Corner tracks see page 347
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	UP 879 K 3 ¼	UP879KD/000	82,6	3.25	4,8	0.19	457,2	18.00	2000	450	0,96	0.65
		UP 879 K 4 ½	UP879KG/000	114,3	4.50	4,8	0.19	500,0	19.69	2000	450	1,11	0.75


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.188")
HINGE 42,9 mm (1.689")



DUPONT® KEVLAR® INSIDE

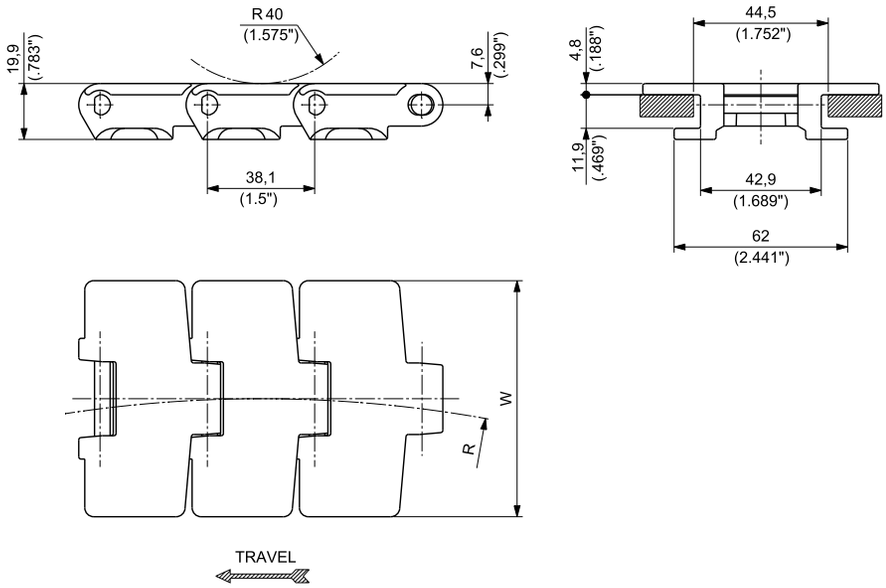

Materials see page 14
Sprockets see pages 147÷149
Corner tracks see page 342
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 879T K 3 ¼	UP879TKD/000	82,6	3.25	4,8	0.19	457,2	18.00	2000	450	1,07	0.72
		UP 879T K 83,8	UP879TKRA/000	83,8	3.30	4,8	0.19	457,2	18.00	2000	450	1,08	0.73
		UP 879T K 4 ½	UP879TKG/000	114,3	4.50	4,8	0.19	500,0	19.69	2000	450	1,28	0.86
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 879T K 3 ¼	D2K879TKD/000	82,6	3.25	4,8	0.19	457,2	18.00	2000	450	1,04	0.70
		D2K 879T K 83,8	D2K879TKRA/000	83,8	3.30	4,8	0.19	457,2	18.00	2000	450	1,05	0.71
		D2K 879T K 4 ½	D2K879TKG/000	114,3	3.30	4,8	0.19	500,0	19.69	2000	450	1,24	0.83


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BEVEL
HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 61 mm (2.402")



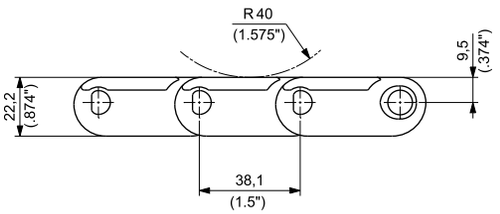

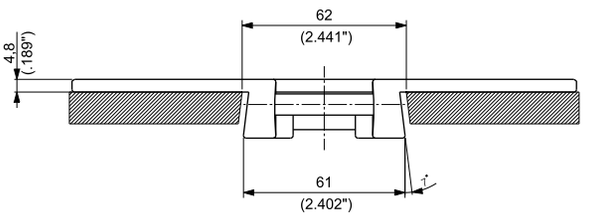

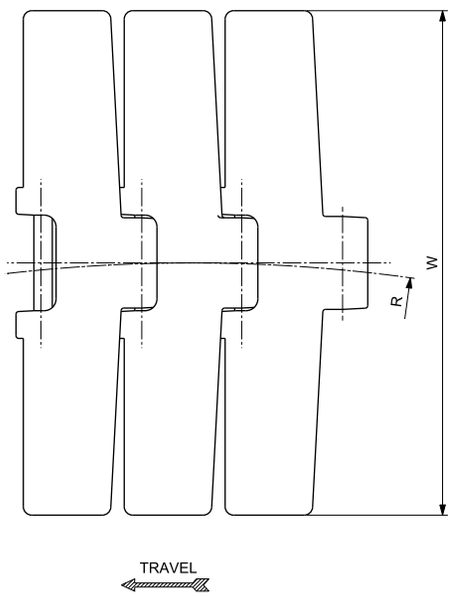

Materials see page 14
Sprockets see pages 150÷151
Corner tracks see page 348
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	UP 882 K 4 ½	UP882KG/000	114,3	4.50	4,8	0.19	609,6	24	3910	879	1,92	1.29
		UP 882 K 7 ½	UP882KL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,31	1.55
		UP 882 K 10	UP882KM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	2,62	1.76
		UP 882 K 12	UP882KN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	2,85	1.91


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

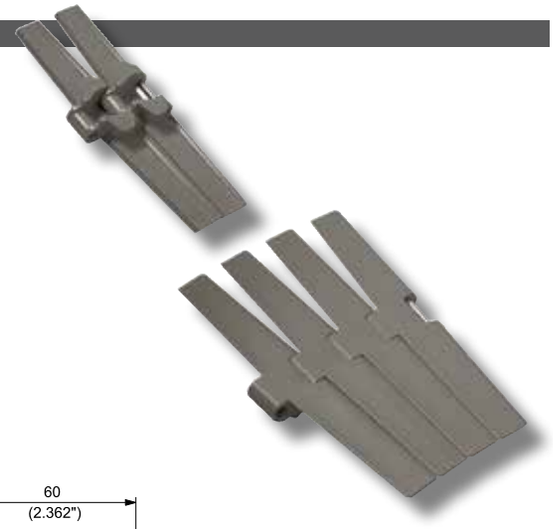

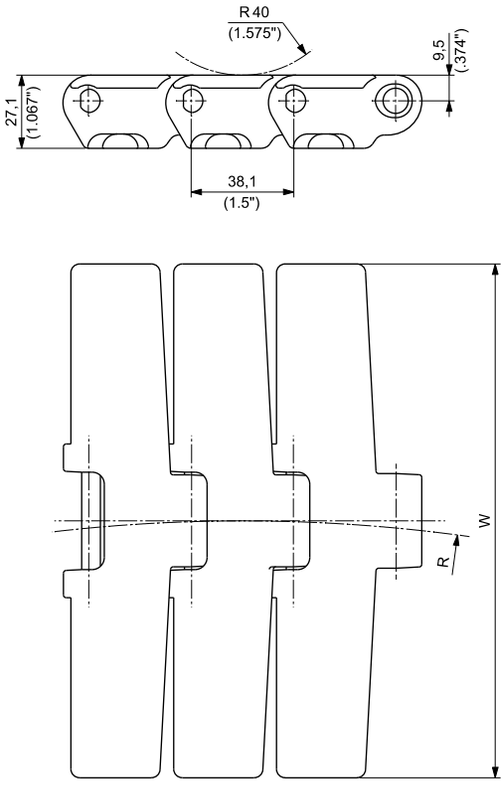


Materials see page 14
Sprockets see pages 150÷152
Corner tracks see page 343
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 882T K 4 ½	UP882TKG/000	114,3	4.50	4,8	0.19	609,6	24	3910	879	2,05	1.38
		UP 882T K 6	UP882TKH/000	152,4	6.00	4,8	0.19	609,6	24	3910	879	2,25	1.51
		UP 882T K 7 ½	UP882TKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,45	1.64
		UP 882T K 10	UP882TKM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	2,75	1.85
		UP 882T K 12	UP882TKN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	2,99	2.01
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® D2K™	AUSTENITIC STAINLESS STEEL	D2K 882T K 4 ½	D2K882TKG/000	114,3	4.50	4,8	0.19	609,6	24	3910	879	2,05	1.38
		D2K 882T K 6	D2K882TKH/000	152,4	6.00	4,8	0.19	609,6	24	3910	879	2,25	1.51
		D2K 882T K 7 ½	D2K882TKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,45	1.64
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	AUSTENITIC STAINLESS STEEL	EF 882T K 4 ½	EF882TKG/000	114,3	4.50	4,8	0.19	609,6	24	3910	879	2,05	1.38

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

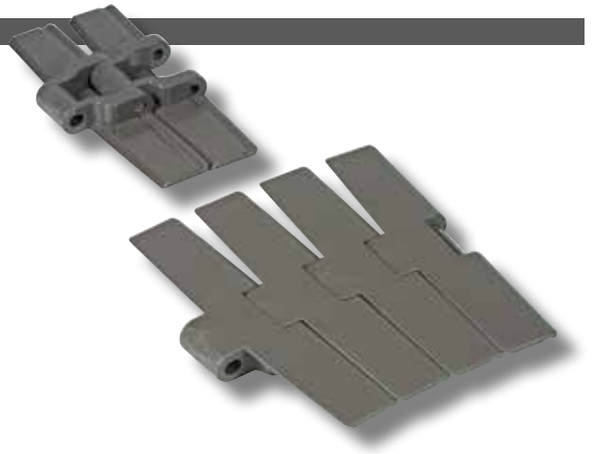

MAGNETIC
HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

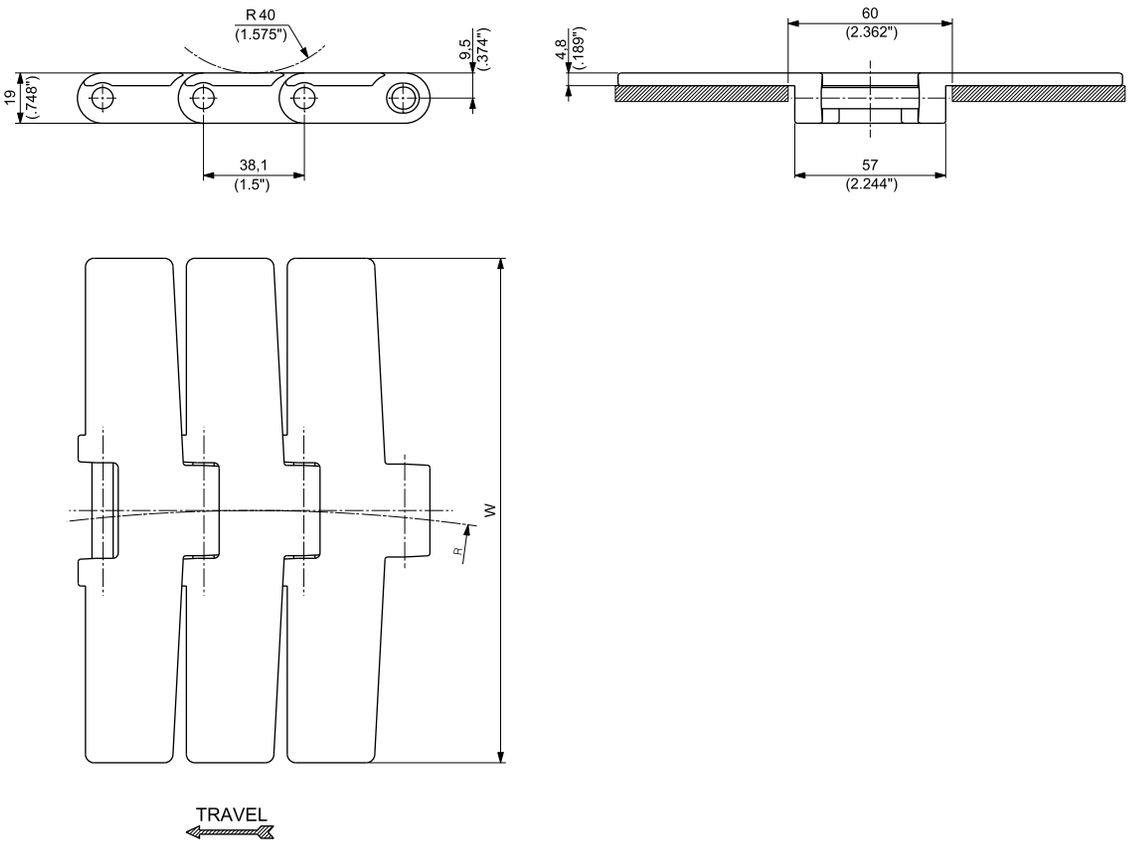

Materials see page 14
Sprockets see pages 150÷151
Corner tracks see pages 301
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	MAGNETIC STAINLESS STEEL	UP 882M K 7 ½	UP882MKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,21	1.48
		UP 882M K 10	UP882MKM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	2,52	1.69
		UP 882M K 12	UP882MKN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	2,76	1.85

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
REDUCED SIDEFLEXING RADIUS
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 42,9 mm (1.689")



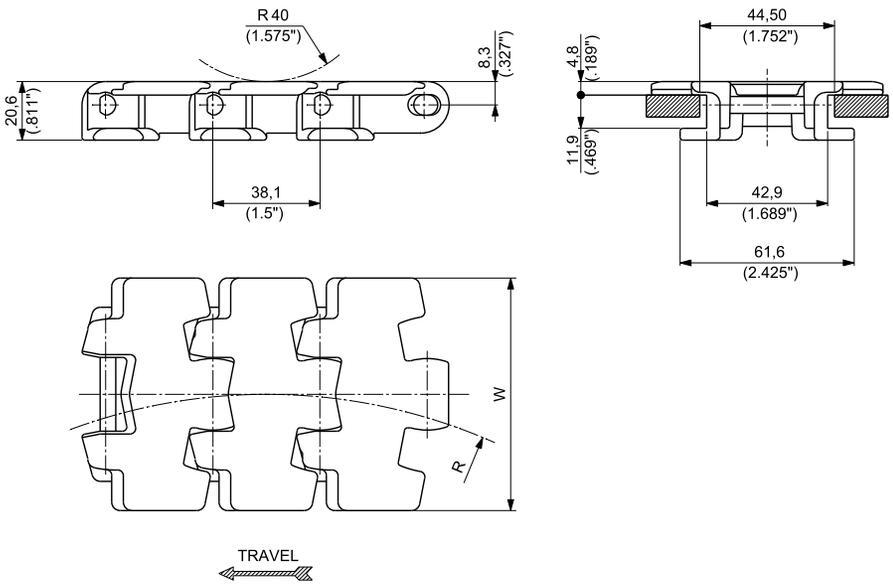

Materials see page 14
Sprockets see pages 147÷149
Corner tracks see page 342
Applications see page 22


MATERIALS Plate	MATERIALS Pin	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	SIDEFLEXING RADIUS R mm	SIDEFLEXING RADIUS R inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	UP 878T K 3 ¼	UP878TKD/000	82,6	3.25	4,8	0.19	200	7.87	2000	450	1,08	0.73
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 878T K 3 ¼	D2K878TKD/000	82,6	3.25	4,8	0.19	200	7.87	2000	450	1,06	0.71
ABRASION RESISTANT POLYAMIDE **AR**	AUSTENITIC STAINLESS STEEL	AR 878T K 3 ¼	AR878TKD/000	82,6	3.25	4,8	0.19	200	7.87	2000	450	0,89	0.60

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
VACUUM SERIES
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 42,9 mm (1.689")



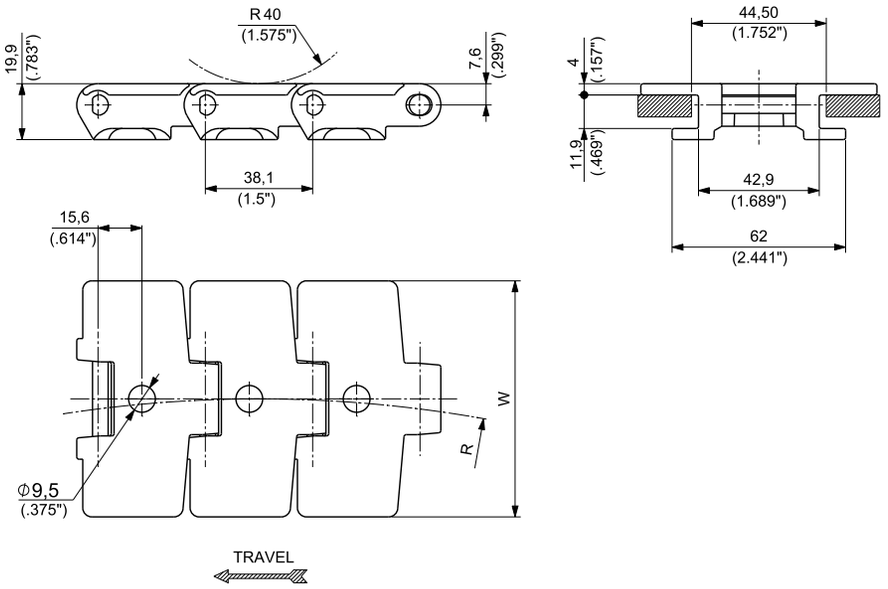

Materials see page 14
Sprockets see pages 147÷149
Corner tracks see page 342
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® **UP**	AUSTENITIC STAINLESS STEEL	UP 880TA K 3 ¼	UP880TAKD/000	82,6	3.25	4,0	0.16	457,2	18	2000	450	0,51	0.34

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


REGINA CHAIN

PERFORMANCE IN MOTION


FliteTop®

Rubberized Surface Plastic Chains




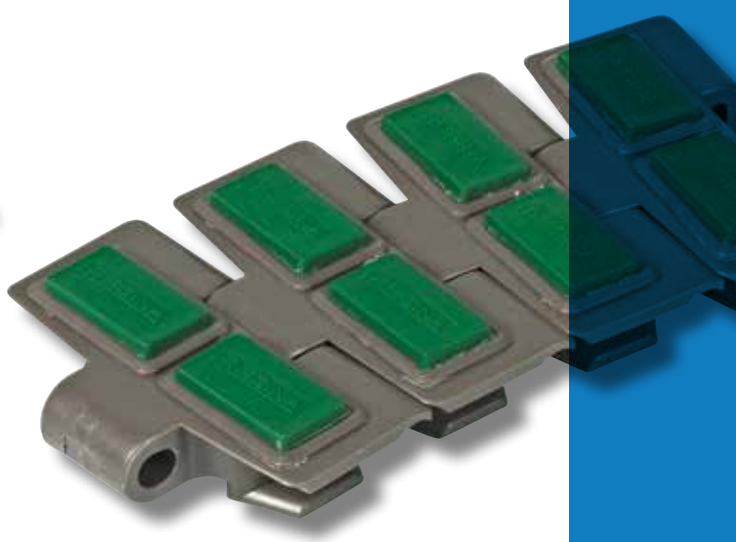



SINGLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 41,6 mm (1.638")

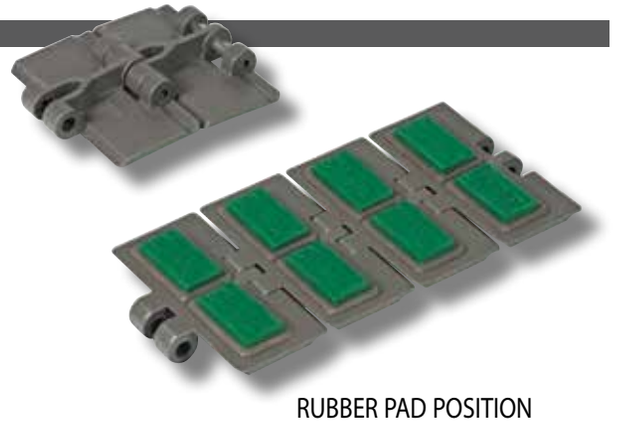



RUBBER PAD POSITION

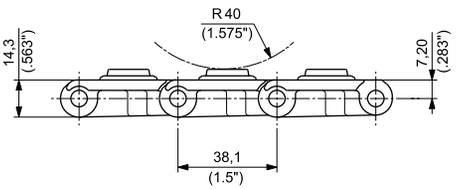





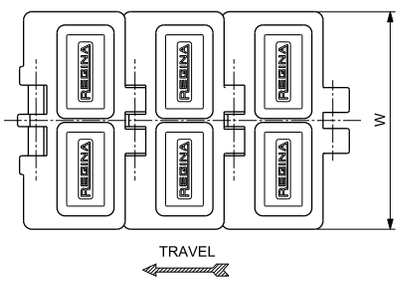


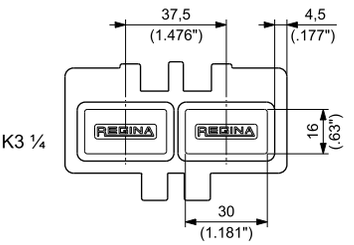

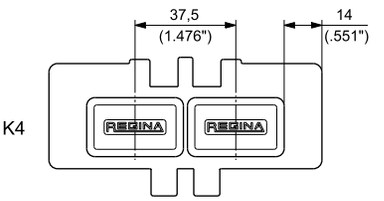

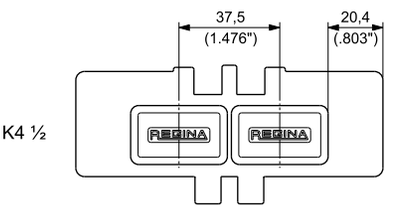

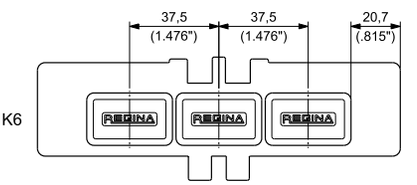

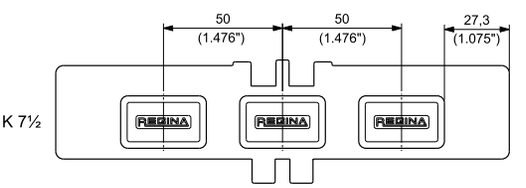


Materials see page 14
Sprockets see pages 141÷144
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 820 UP K 3 ¼	HFX820KD/000	82,6	3.25	4,0	0.16	1600	360	1,00	0.67
			HFX 820 UP K 4	HFX820KF/000	101,6	4.00	4,0	0.16	1600	360	1,09	0.73
			HFX 820 UP K 4 ½	HFX820KG/000	114,3	4.50	4,0	0.16	1600	360	1,17	0.79
			HFX 820 UP K 6	HFX820KH/000	152,4	6.00	4,0	0.16	1600	360	1,45	0.97
			HFX 820 UP K 7 ½	HFX820KL/000	190,5	7.50	4,0	0.16	1600	360	1,60	1.07


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

DOUBLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 136,5 mm (5.374")

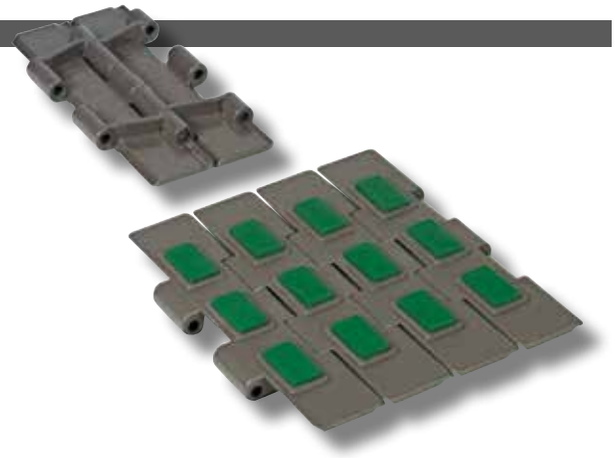

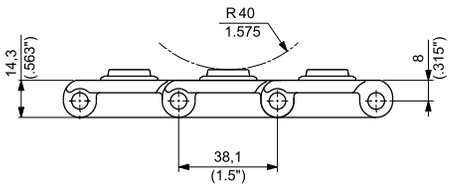


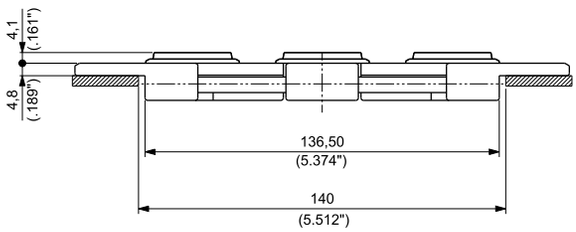

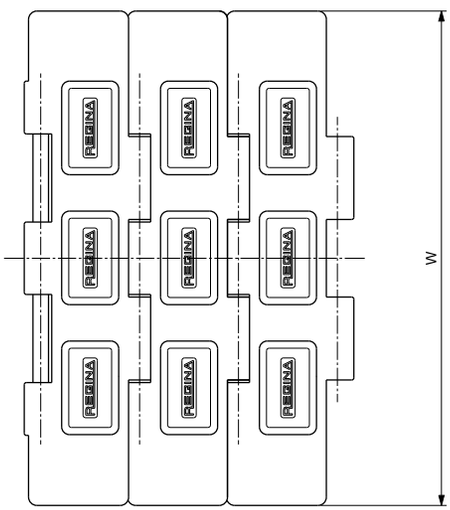

TRAVEL

RUBBER PAD POSITION

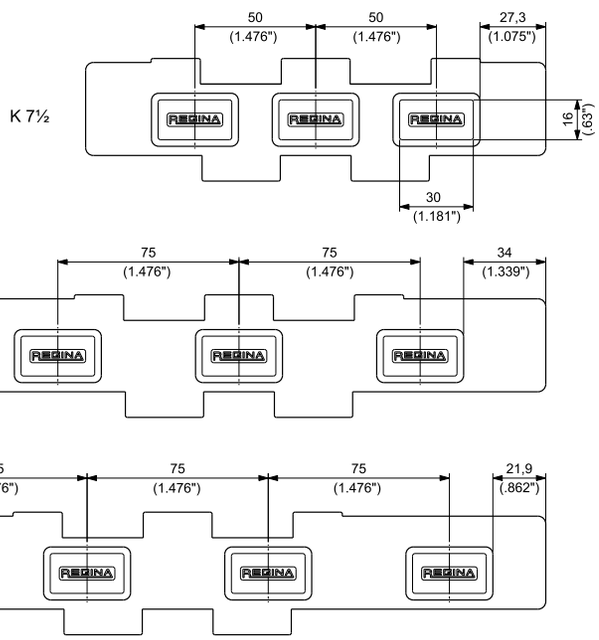

Materials see page 14
Sprockets see pages 145÷146
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 821 UP K 7 ½	HFX821KL/000	190,5	7.50	4,8	0.19	2750	618	2,68	1.80
			HFX 821 UP K 10	HFX821KM/000	254,0	10.00	4,8	0.19	2750	618	3,06	2.06
			HFX 821 UP K 12	HFX821KN/000	304,8	12.00	4,8	0.19	2750	618	3,43	2.30


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


STRAIGHT RUNNING RUBBERIZED SURFACE PLASTIC CHAINS - **HFX 8257 SERIES**

HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

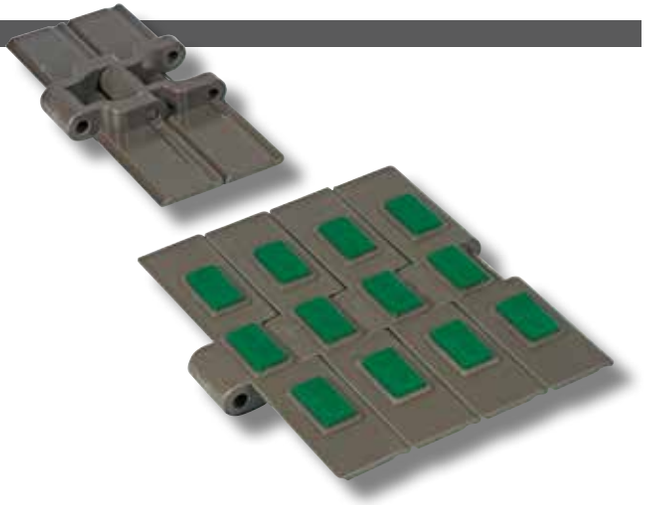


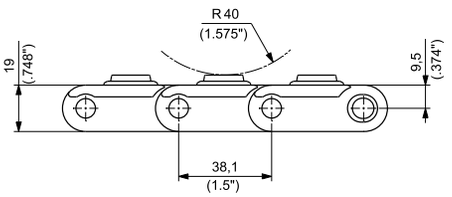


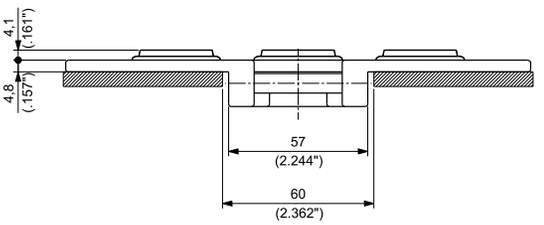


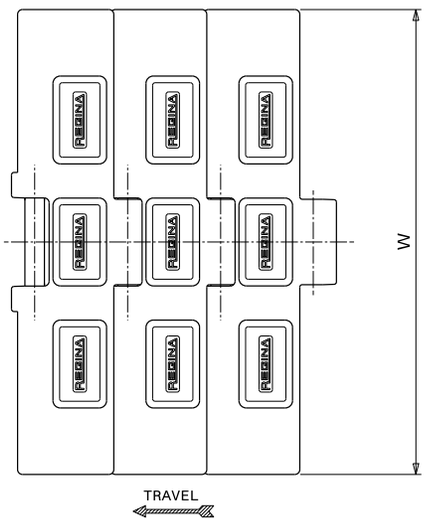

RUBBER PAD POSITION

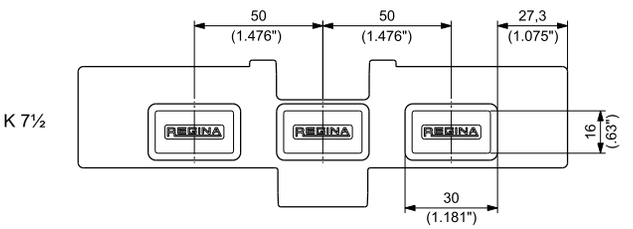

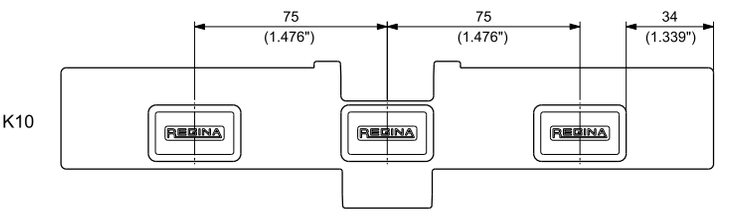

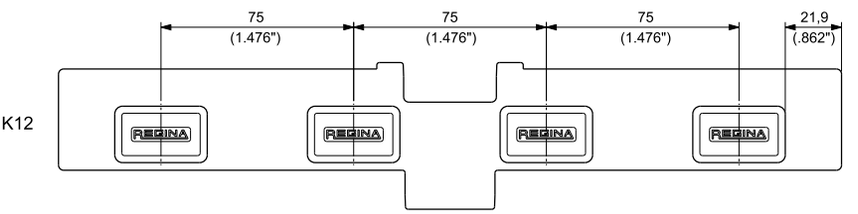


Materials see page 14
Sprockets see pages 150÷151
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 8257 UP K 7 ½	HFX8257UPKL/000	190,5	7.50	4,8	0.19	3910	154	2,54	1.71
			HFX 8257 UP K 10	HFX8257UPKM/000	254,0	10.00	4,8	0.19	3910	154	2,93	1.97
			HFX 8257 UP K 12	HFX8257UPKN/000	304,8	12.00	4,8	0.19	3910	154	3,49	2.34


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
PITCH 1 ½" (38,1 mm)
THICKNESS 4 mm (0.157")
HINGE 42,9 mm (1.689")

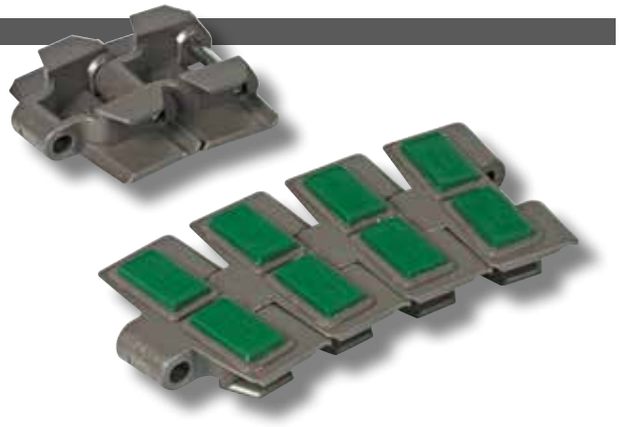


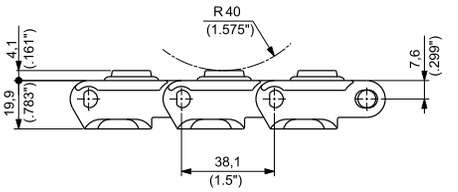




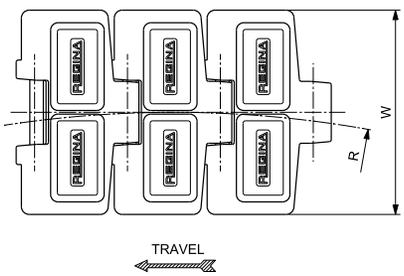

RUBBER PAD POSITION

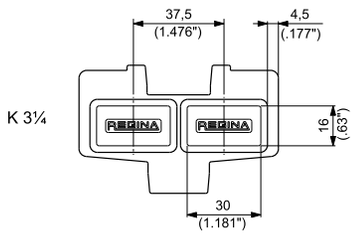

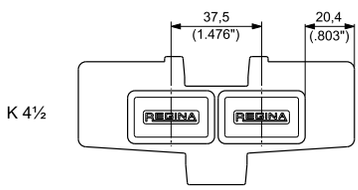


Materials see page 14
Sprockets see pages 147÷149
Corner tracks see page 342
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	mm	Inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC **TPE** Hardness: 70 ShA	HFX 880T UP K 3 ¼	HFX880TKD/000	82,6	3.25	4,0	0.16	457,2	18.00	2750	618	1,33	0.89
			HFX 880T UP K 4 ½	HFX880TKG/000	114,3	4.50	4,0	0.16	500,0	19.69	2750	618	1,50	1.00


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

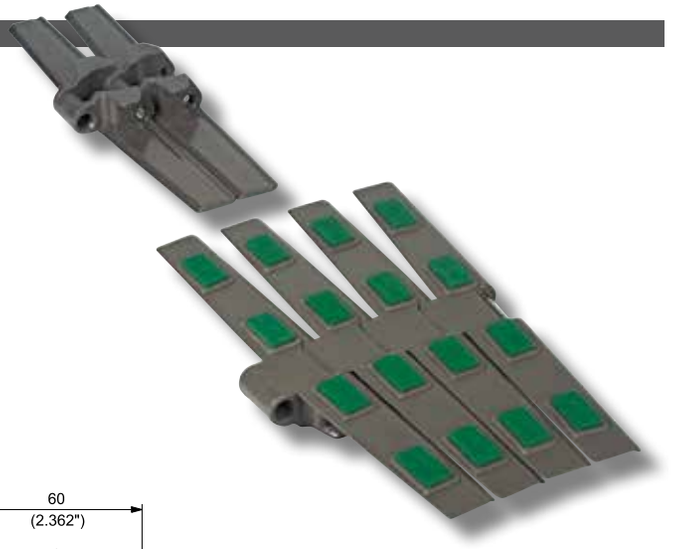


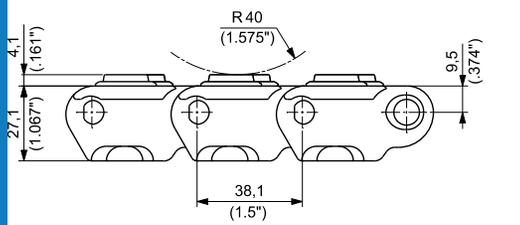


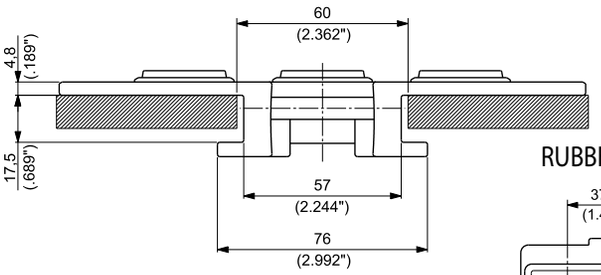


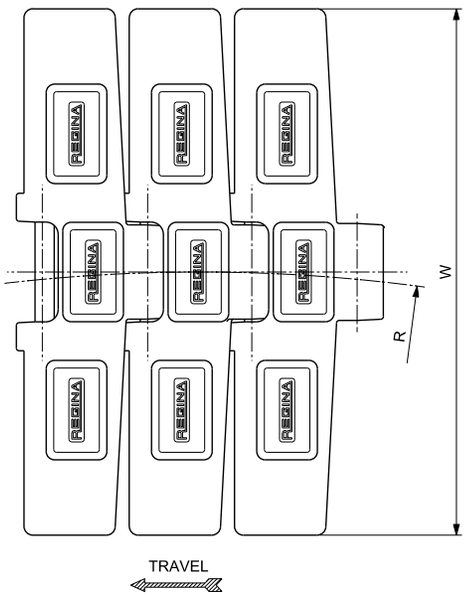


RUBBER PAD POSITION

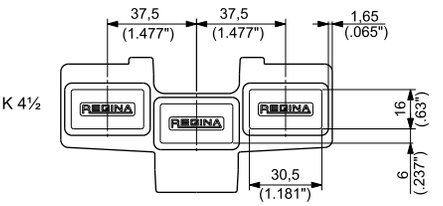

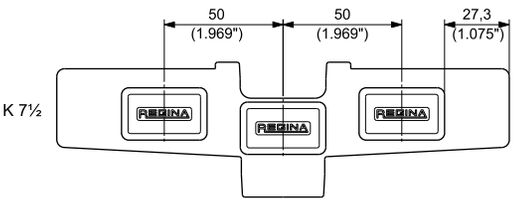

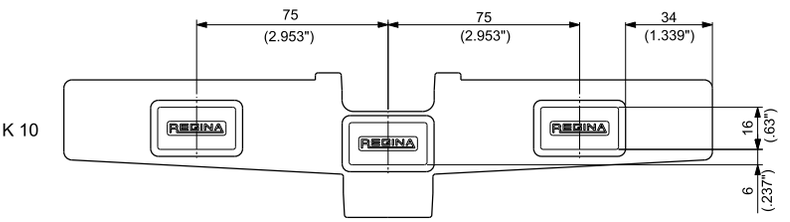

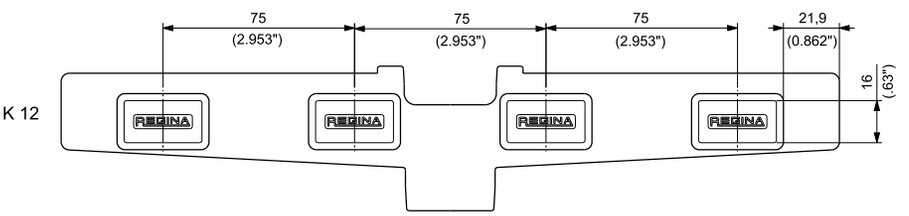


Materials see page 14
Sprockets see pages 150÷152
Corner tracks see page 343
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 882T UP K 4 ½	HFX882TKG/000	114,3	4.50	4,8	0.19	609,6	24	3910	879	2,25	1.71
			HFX 882T UP K 7 ½	HFX882TKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,64	1.78
			HFX 882T UP K 10	HFX882TKM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	2,95	1.98
			HFX 882T UP K 12	HFX882TKN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	3,25	2.18


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MAGNETIC
HEAVY DUTY SINGLE HINGE
REINFORCED TOP PLATE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

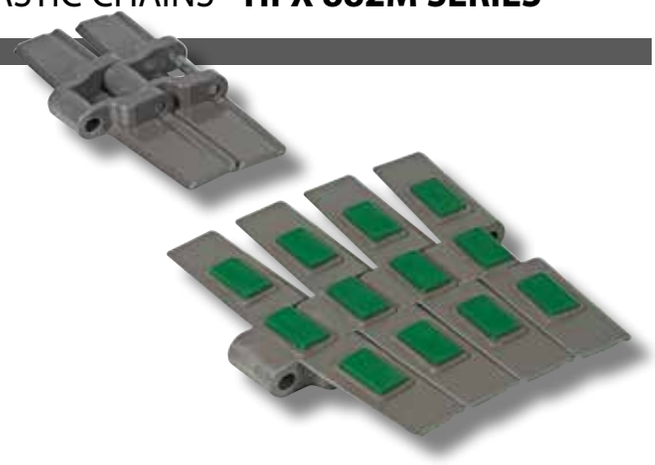


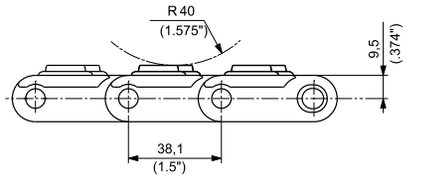


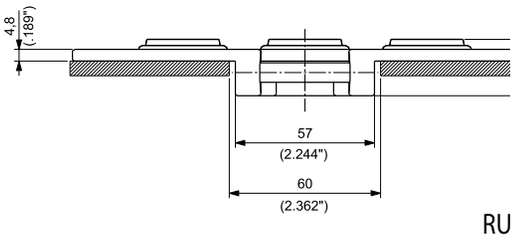


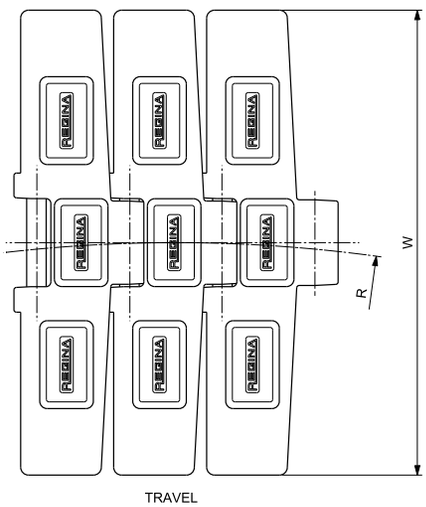

RUBBER PAD POSITION

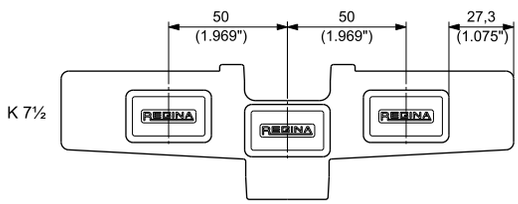

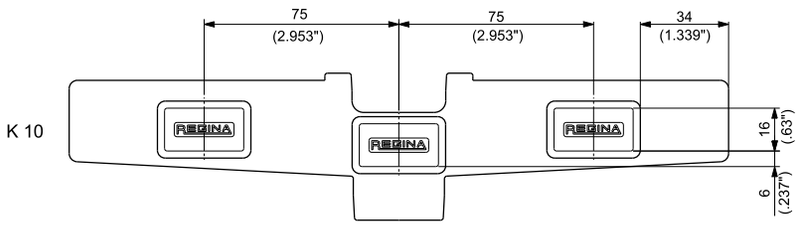

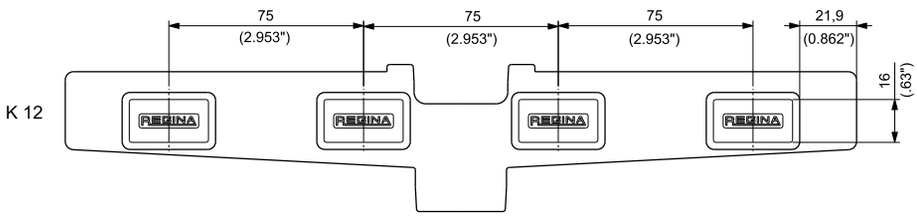

Materials see page 14
Sprockets see pages 150÷151
Corner tracks see pages 301
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	MAGNETIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 882M UP K 7 ½	HFX882MUPKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	2,40	1.61
			HFX 882M UP K 10	HFX882MUPKM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	2,71	1.82
			HFX 882M UP K 12	HFX882MUPKN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	3,02	2.03

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SIDEFLEXING RUBBERIZED SURFACE PLASTIC CHAINS - **HFX 1873T SERIES**

TAB
PLASTIC FLIGHTS
¾" PITCH ROLLER CHAIN
BIDIRECTIONAL
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

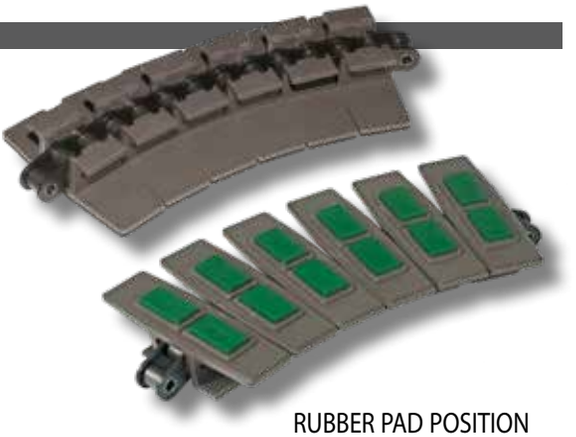


POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

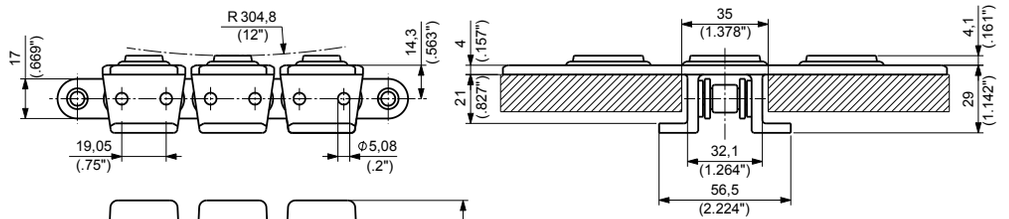

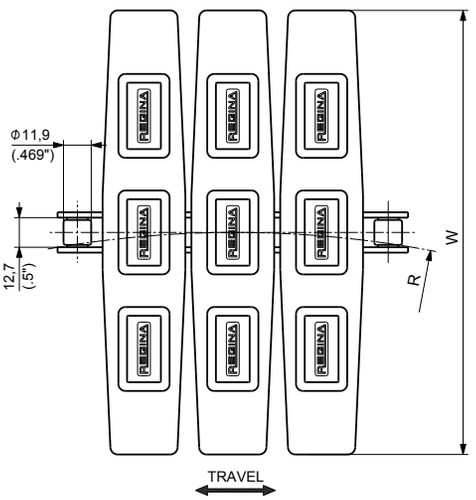

RUBBER PAD POSITION

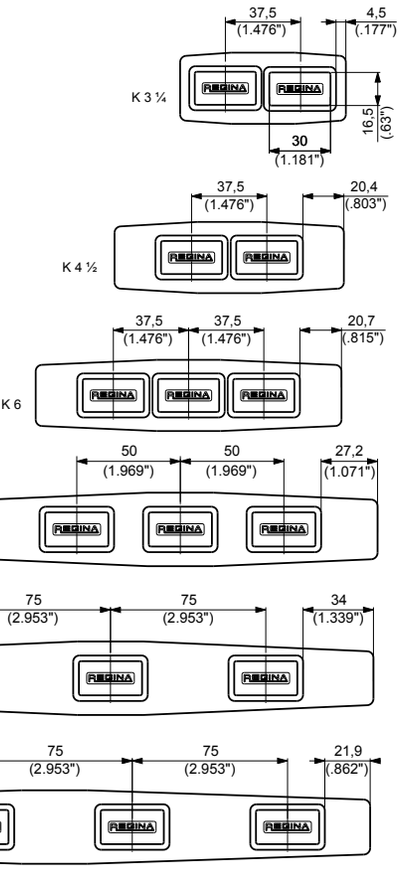

Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 1873T UP K 3 ¼	HFX1873KD/000	18/0873	82,6	3.25	355,6	14	4500	1,013	2,42	1.63
			HFX 1873T UP K 4 ½	HFX1873KG/000		114,3	4.50	355,6	14	4500	1,013	2,51	1.69
			HFX 1873T UP K 6	HFX1873KH/000		152,4	6.00	457,2	18	4500	1,013	2,74	1.84
			HFX 1873T UP K 7 ½	HFX1873KL/000		190,5	7.50	457,2	18	4500	1,013	3,03	2.04
			HFX 1873T UP K 10	HFX1873KM/000		254,0	10.00	457,2	18	4500	1,013	3,16	2.12
			HFX 1873T UP K 12	HFX1873KN/000		304,8	12.00	609,6	24	4500	1,013	3,38	2.27
	STAINLESS STEEL SS	THERMOPLASTIC TPE Hardness: 70 ShA	HFX 1873T UP SS K 3 ¼	HFX1873SKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	788	2,41	1.62
			HFX 1873T UP SS K 4 ½	HFX1873SKG/000		114,3	4.50	355,6	14	3500	788	2,46	1.65
			HFX 1873T UP SS K 6	HFX1873SKH/000		152,4	6.00	457,2	18	3500	788	2,72	1.83
			HFX 1873T UP SS K 7 ½	HFX1873SKL/000		190,5	7.50	457,2	18	3500	788	3,01	2.02
			HFX 1873T UP SS K 10	HFX1873SKM/000		254,0	10.00	457,2	18	3500	788	3,14	2.11
			HFX 1873T UP SS K 12	HFX1873SKN/000		304,8	12.00	609,6	24	3500	788	3,36	2.26

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

Two-Piece Chains



INDUSTRIES AND APPLICATIONS

TWO-PIECE CHAINS

Suitable for handling products (loose or packaged) where less stick slip effect and accurate product positioning (step by step applications) are required.

INDUSTRIES

Bottling and canning

Container manufacturing

Paper / Cardboard

Glass manufacturing

Automotive / Mechanical

APPLICATIONS

General single lane conveyors

Product handling within packaging machine



FEATURES


- Powered by ASA 40 and ASA 60 base roller chains made by REGINA in Italy.
- Stainless steel chain prelubricated with high performance lube suitable for the food industry (USDA H1 approved) which guarantees long-lasting effect for the chain.
- Great loading capacity at higher speed.
- Possibility of longer conveyor on a single drive.
- Easy replaceable top flights clipped on the protruding pins on the base roller chain.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

STEEL FLIGHTS
¾" PITCH ROLLER CHAIN
BIDIRECTIONAL
THICKNESS 3 mm (0.118")
HINGE 27 mm (1.063")



POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

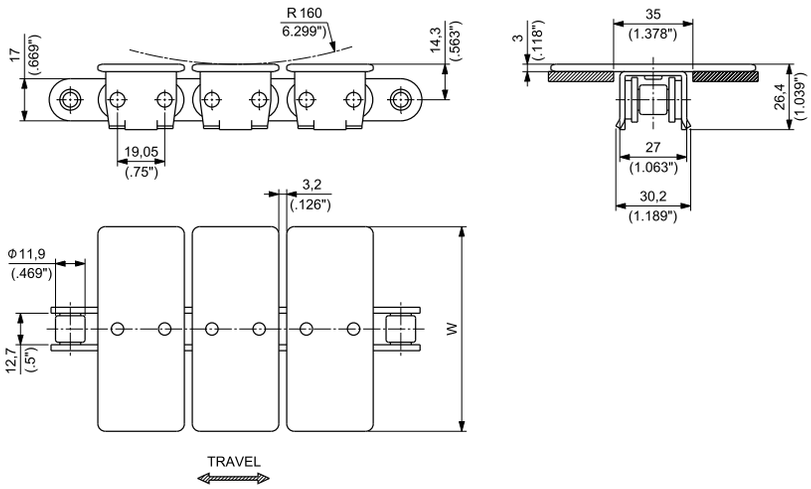

Materials see page 14
Sprockets see page 154
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CARBON STEEL S	1864 K 3 ¼	1864KD/000	18/0864	82,6	3.25	5500	1,236	4,00	2.69
		1864 K 4 ½	1864KG/000		114,3	4.50	5500	1,236	4,73	3.18
		1864 K 6	1864KH/000		152,4	6.00	5500	1,236	5,60	3.76
		1864 K 7 ½	1864KL/000		190,5	7.50	5500	1,236	6,16	4.14
STAINLESS STEEL SS	STAINLESS STEEL SS	SS 1864 K 3 ¼	1864SSKD/000	18/SS864AB	82,6	3.25	4500	1,012	3,94	2.65
		SS 1864 K 4 ½	1864SSKG/000		114,3	4.50	4500	1,012	4,67	3.14
		SS 1864 K 6	1864SSKH/000		152,4	6.00	4500	1,012	5,33	3.58
		SS 1864 K 7 ½	1864SSKL/000		190,5	7.50	4500	1,012	6,09	4.10


Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved



TAB
STEEL FLIGHTS
¾" PITCH ROLLER CHAIN
BIDIRECTIONAL
THICKNESS 3 mm (0.118")
HINGE 31,8 mm (1.252")
1874T: FLIGHT GAP 8,2 mm
1874TM: REDUCED FLIGHT GAP 5,7 mm

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

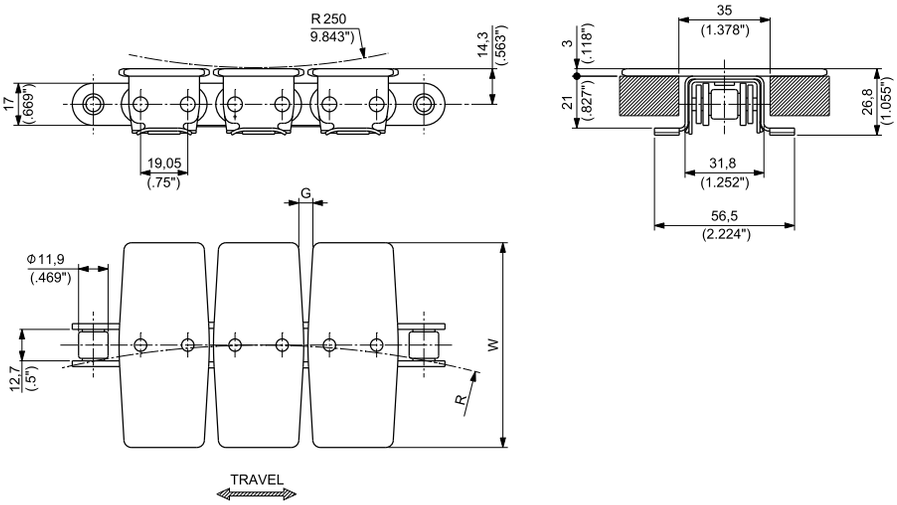

Materials see page 14
Sprockets see pages 154
Corner tracks see page 344
Applications see page 22

1874T

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		STRAIGHT RUNNING GAP G		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CARBON STEEL S	1874T K 3 ¼	1874TKD/000	18/0873	82,6	3.25	8,2	0.323	381,0	15	4500	1,012	4,21	2.83
		1874T K 4 ½	1874TKG/000		114,3	4.50	8,2	0.323	381,0	15	4500	1,012	4,80	3.22
		1874T K 6	1874TKH/000		152,4	6.00	8,2	0.323	457,2	18	4500	1,012	5,59	3.75
		1874T K 7 ½	1874TKL/000		190,5	7.50	8,2	0.323	609,6	24	4500	1,012	6,31	4.24
STAINLESS STEEL SS	STAINLESS STEEL SS	SS 1874T K 3 ¼	1874TSSKD/000	18/SS873AB	82,6	3.25	8,2	0.323	381,0	15	3500	787	4,13	2.78
		SS 1874T K 4 ½	1874TSSKG/000		114,3	4.50	8,2	0.323	381,0	15	3500	787	4,72	3.17
		SS 1874T K 6	1874TSSKH/000		152,4	6.00	8,2	0.323	457,2	18	3500	787	5,51	3.70
		SS 1874T K 7 ½	1874TSSKL/000		190,5	7.50	8,2	0.323	609,6	24	3500	787	6,22	4.18

1874TM

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		STRAIGHT RUNNING GAP G		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch			mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CARBON STEEL S	1874TM K 4 ½	1874MLKG/000	18/0873	114,3	4.50	5,7	0.224	609,6	24	4500	1012	4,80	3.22


Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PLASTIC FLIGHTS
½" PITCH ROLLER CHAIN
THICKNESS 3.2 mm (0.126")
HINGE 20,6 mm (0.811")



POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

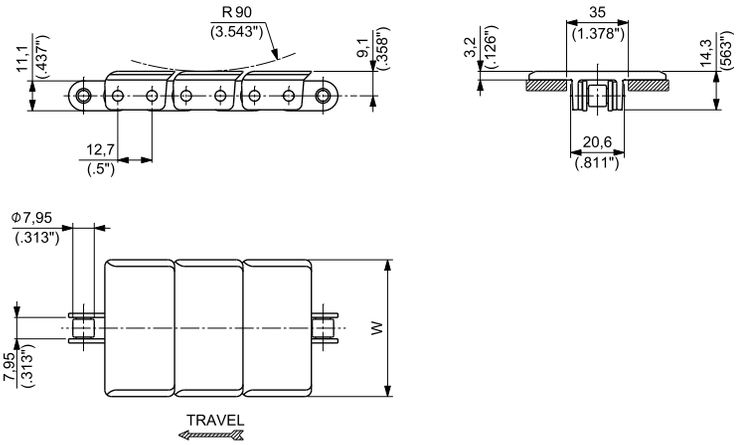

Materials see page 14
Sprockets see page 153
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	UP 843 K 1 ⅜	UP843KA/000	18/0843	34,9	1.37	3500	787	0,65	0.43
		UP 843 K 2	UP843KB/000		50,8	2.00	3500	787	0,71	0.48
		UP 843 K 3 ¼	UP843KD/000		82,6	3.25	3500	787	0,84	0.57
	STAINLESS STEEL SS	UP 843 SS K 1 ⅜	UP843SKA/000	18/SS843AB	34,9	1.37	2700	607	0,84	0.56
		UP 843 SS K 2	UP843SKB/000		50,8	2.00	2700	607	0,90	0.61
		UP 843 SS K 3 ¼	UP843SKD/000		82,6	3.25	2700	607	1,03	0.69

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

STRAIGHT RUNNING TWO-PIECE CHAINS - **845 SERIES**

PLASTIC FLIGHTS
½" PITCH ROLLER CHAIN
BIDIRECTIONAL
THICKNESS 3.2 mm (0.126")
HINGE 20,6 mm (0.811")



POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

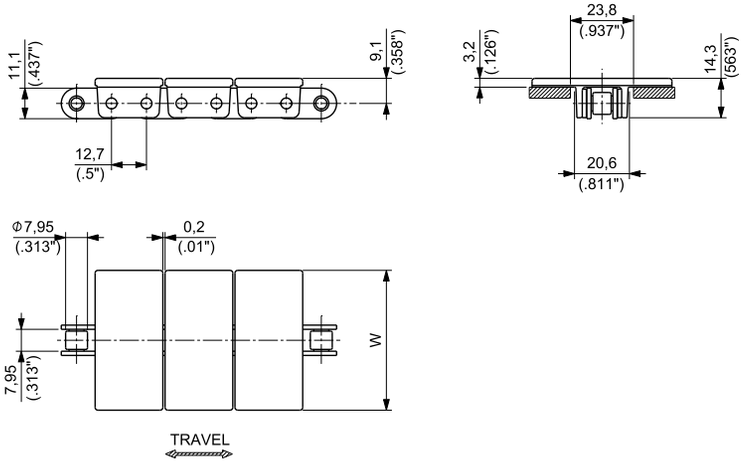

Materials see page 14
Sprockets see page 153
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	UP 845 K 1 ⅜	UP845KA/000	18/0843	34,9	1.37	3500	787	0,66	0.44
		UP 845 K 40	UP845KP/000		40,0	1.57	3500	787	0,69	0.46
		UP 845 K 2	UP845KB/000		50,8	2.00	3500	787	0,73	0.49
	STAINLESS STEEL SS	UP 845 SS K 1 ⅜	UP845SKA/000	18/SS843AB	34,9	1.37	2700	607	0,85	0.57
		UP 845 SS K 40	UP845SKP/000		40,0	1.57	2700	607	0,88	0.59
		UP 845 SS K 2	UP845SKB/000		50,8	2.00	2700	607	0,92	0.62


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PLASTIC FLIGHTS
½" PITCH ROLLER CHAIN
BIDIRECTIONAL
RAISED RIB
THICKNESS 12,2 mm (0.480")
HINGE 20,6 mm (0.811")


POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY



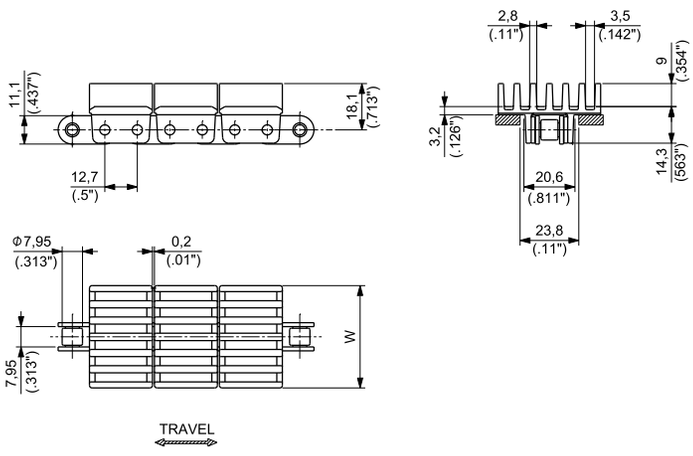


TRANSFER COMB

The comb is supplied with slot cover but without fastening screws.
One fastening screw is required for each comb.
It can be ordered using P/N 16300005.

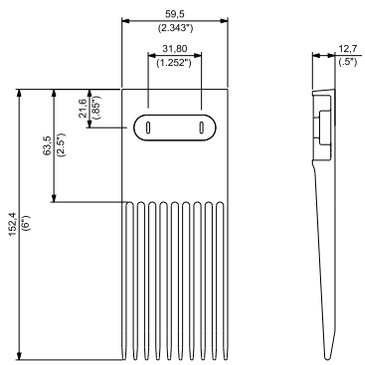

PART NUMBER: **TC845-01**
(Acetal Resin material)



PART NUMBER: **16300005**
(Stainless Steel material)


Materials see page 14
Sprockets see page 153
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CHEMICALLY NICKEL CARBON STEEL (NC) S+NC	RR 845 UP NC K 40	R845UPCKP/000	18/843-003	40,0	1.57	3500	787	0,94	0.63
		RR 845 UP NC K 53,6	R845UPCKZA/000		53,6	2.11	3500	787	1,02	0.69


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PLASTIC FLIGHTS
1/2" PITCH ROLLER CHAIN
BIDIRECTIONAL
RUBBERIZED RAISED RIB
THICKNESS 12,6 mm (0.496")
HINGE 20,6 mm (0.811")

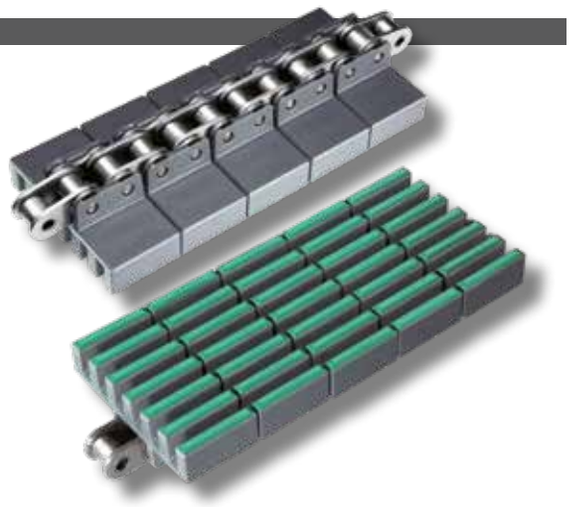

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

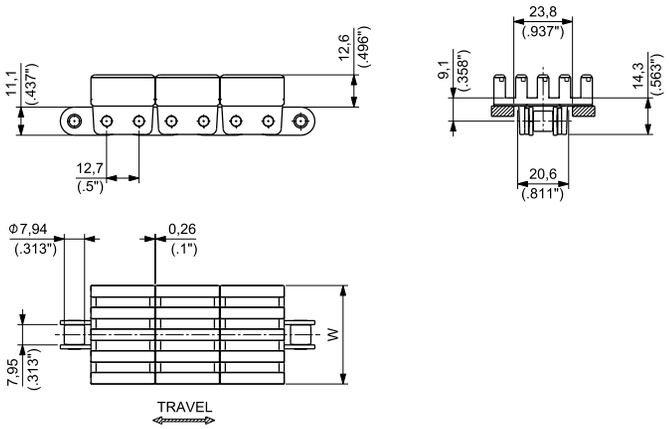

Materials see page 14
Combs see pages 83
Sprockets see page 153
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain	Rubber				mm	Inch	N	lbs	kg/m	lbs/ft
SPECIAL POLIPROPYLENE PP	CHEMICALLY NICKEL CARBON STEEL (NC) S+NC	THERMOPLASTIC TPE Hardness: 50 ShA	HF RR 845 PP NC K 38,5	HFR845PPCKMB/000	18/843-003	38,5	1.57	3500	787	0,97	0.65
			HF RR 845 PP NC K 55,5	HFR845PPCKCC/000		55,5	2.11	3500	787	1,09	0.73

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TRANSFER COMBS




Combs are supplied with slot covers but without fastening screws.
One fastening screw is required for each comb.
It can be ordered using P/N 16300020.

MATERIALS		
COMBS:	DG	ACETAL RESIN
SCREWS*:	SS	STAINLESS STEEL


*Screws are not included in the combs.

COMB FOR K 55,5 CHAIN

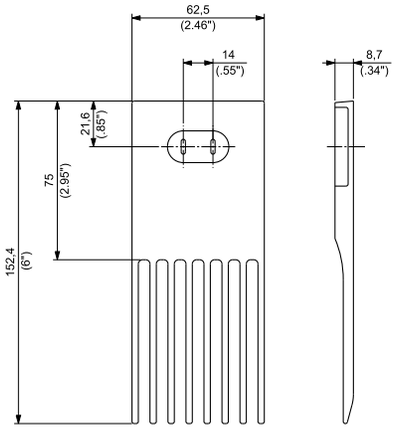


PART NUMBER **TC1600-01**

COMB FOR K 38,5 CHAIN

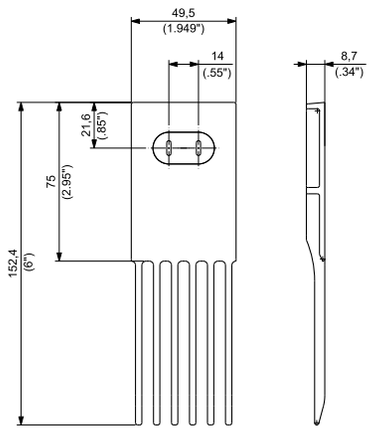

PART NUMBER **TC1600-03**




PART NUMBER **16300020**

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PLASTIC FLIGHTS
¾" PITCH ROLLER CHAIN
THICKNESS 4 mm (0.157")
HINGE 34,1 mm (1.343")



POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

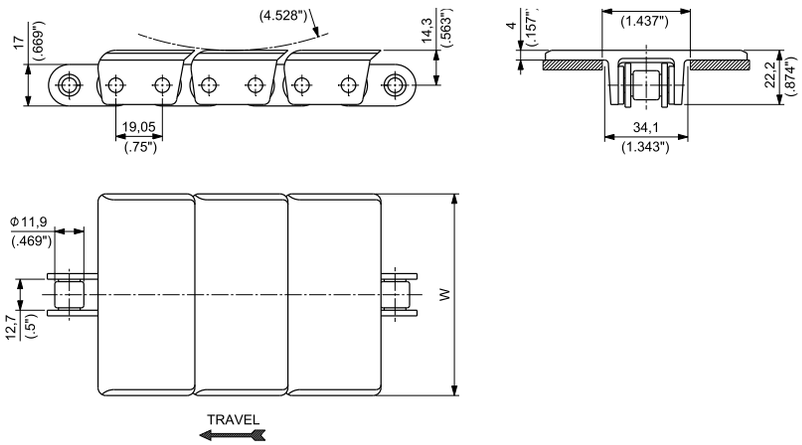

Materials see page 14

Sprockets see page 154

Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	UP 863 K 3 ¼	UP863KD/000	18/0863	82,6	3.25	5000	1124	2,21	1.48
		UP 863 K 4 ½	UP863KG/000		114,3	4.50	5000	1124	2,38	1.60
		UP 863 K 6	UP863KH/000		152,4	6.00	5000	1124	2,58	1.73
		UP 863 K 7 ½	UP863KL/000		190,5	7.50	5000	1124	2,78	1.87
	STAINLESS STEEL SS	UP 863 SS K 3 ¼	UP863SKD/000	18/SS863AB	82,6	3.25	4000	899	2,16	1.45
		UP 863 SS K 4 ½	UP863SKG/000		114,3	4.50	4000	899	2,33	1.57
		UP 863 SS K 6	UP863SKH/000		152,4	6.00	4000	899	2,53	1.70
		UP 863 SS K 7 ½	UP863SKL/000		190,5	7.50	4000	899	2,73	1.84


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
PLASTIC FLIGHTS
½" PITCH ROLLER CHAIN
THICKNESS 3.2 mm (0.126")
HINGE 20 mm (0.787")



POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

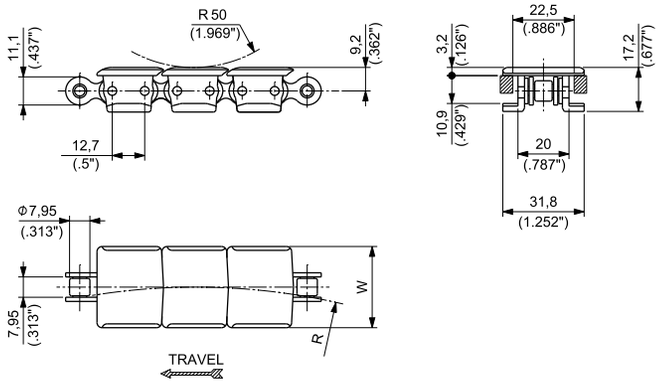


Materials see page 14
Sprockets see pages 153
Corner tracks see page 344
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	CARBON STEEL S	UP 1843T K 1 ¼	UP1843KPA/000	18/1843	31,8	1.25	254	10	2600	584	0,80	0.54
	STAINLESS STEEL SS	UP 1843T SS K 1 ¼	UP1843SKPA/000	18/SS1843	31,8	1.25	254	10	2000	450	0,82	0.55
ABRASION RESISTANT POLYAMIDE **AR**	CARBON STEEL S	AR 1843T K 1 ¼	AR1843KPA/000	18/1843	31,8	1.25	254	10	2600	584	0,80	0.54


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

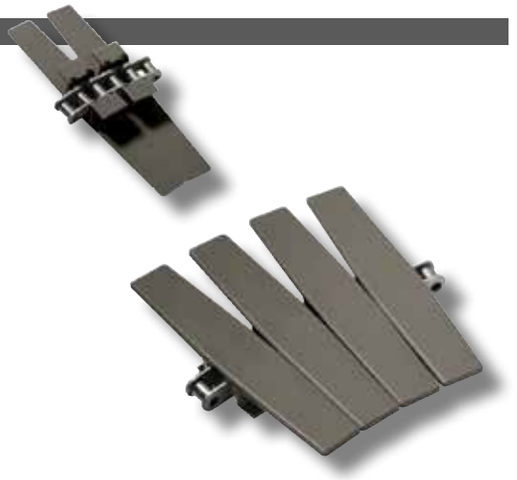


TAB
PLASTIC FLIGHTS
¾" PITCH ROLLER CHAIN
BIDIRECTIONAL
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

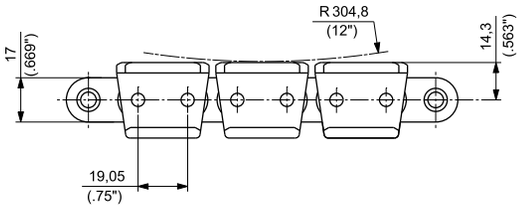

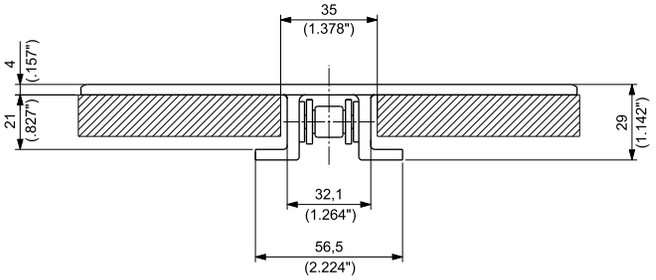

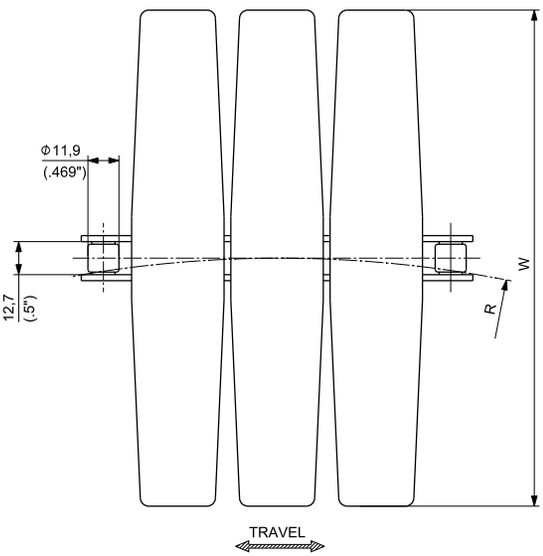


Materials see page 14
Sprockets see pages 154
Corner tracks see page 344
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	UP 1873T K 3 ¼	UP1873KD/000	18/0873	82,6	3.25	355,6	14	4500	1,012	2,31	1.55
		UP 1873T K 4 ½	UP1873KG/000		114,3	4.50	355,6	14	4500	1,012	2,39	1.60
		UP 1873T K 6	UP1873KH/000		152,4	6.00	457,2	18	4500	1,012	2,57	1.73
		UP 1873T K 7 ½	UP1873KL/000		190,5	7.50	457,2	18	4500	1,012	2,86	1.92
		UP 1873T K 10	UP1873KM/000		254,0	10.00	457,2	18	4500	1,012	2,99	2.01
		UP 1873T K 12	UP1873KN/000		304,8	12.00	609,6	24	4500	1,012	3,15	2.12
	STAINLESS STEEL SS	UP 1873T SS K 3 ¼	UP1873SKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	2,25	1.51
		UP 1873T SS K 4 ½	UP1873SKG/000		114,3	4.50	355,6	14	3500	787	2,33	1.57
		UP 1873T SS K 6	UP1873SKH/000		152,4	6.00	457,2	18	3500	787	2,52	1.69
		UP 1873T SS K 7 ½	UP1873SKL/000		190,5	7.50	457,2	18	3500	787	2,80	1.88
		UP 1873T SS K 10	UP1873SKM/000		254,0	10.00	457,2	18	3500	787	2,94	1.97
		UP 1873T SS K 12	UP1873SKN/000		304,8	12.00	609,6	24	3500	787	3,09	2.08


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
PLASTIC FLIGHTS
¾" PITCH ROLLER CHAIN
REDUCED FLIGHT GAP
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

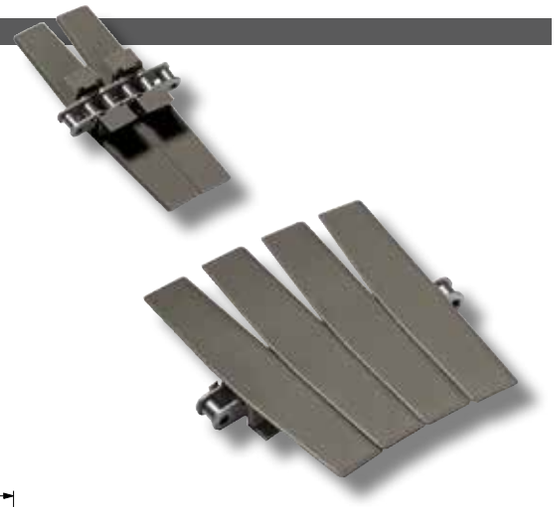

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

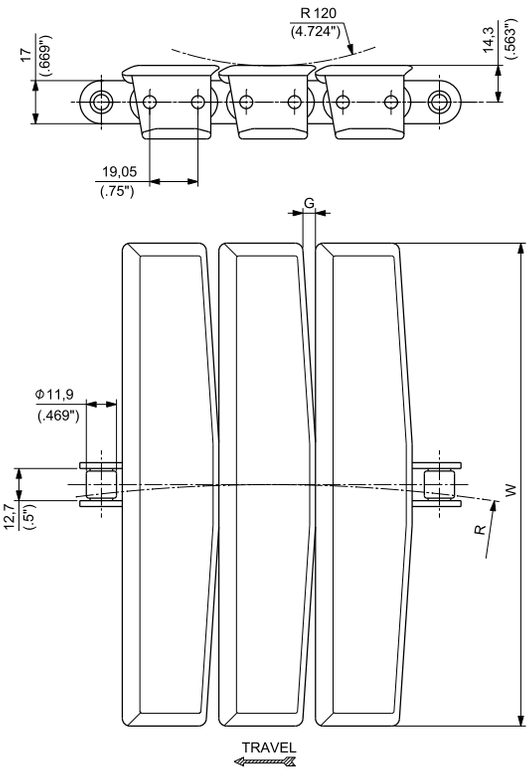

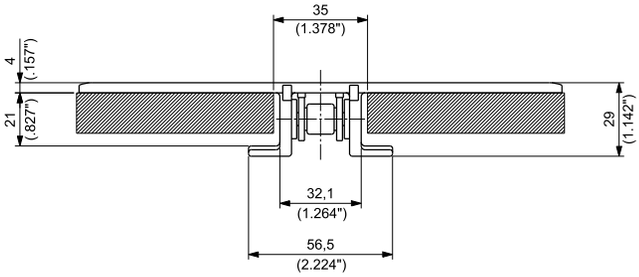

Gap comparison between 1863T and 1873T series

1863T

CHAIN WIDTH	SIDEFLEXING RADIUS R		SIDEFLEXING GAP G		STRAIGHT RUNNING GAP G	
	mm	inch	mm	inch	mm	inch
3 ¼	400,0	15.75	3,2	0.126	0	0
4 ½	457,2	18	5,8	0.228	1,3	0.051
7 ½	609,6	24	8,6	0.339	2,7	0.106
12	609,6	24	15,6	0.614	6,2	0.244

1873T

CHAIN WIDTH	SIDEFLEXING RADIUS R		SIDEFLEXING GAP G		STRAIGHT RUNNING GAP G	
	mm	inch	mm	inch	mm	inch
3 ¼	355,6	14	10,5	0.413	5,2	0.205
4 ½	355,6	14	13,5	0.531	6,7	0.264
7 ½	457,2	18	17,5	0.689	8,7	0.343
12	609,6	24	21,0	0.827	10,5	0.413

Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	UP 1863T K 2 ¼	UP1863KS/000	18/0873	57,1	2.25	457,2	18.00	4500	1,012	2,04	1.37
		UP 1863T K 3 ¼	UP1863KD/000		82,6	3.25	457,2	18.00	4500	1,012	2,17	1.46
		UP 1863T K 4 ½	UP1863KG/000		114,3	4.50	457,2	18.00	4500	1,012	2,32	1.56
		UP 1863T K 7 ½	UP1863KL/000		190,5	7.50	609,6	24.00	4500	1,012	2,68	1.80
		UP 1863T K 12	UP1863KN/000		304,8	12.00	609,6	24.00	4500	1,012	3,16	2.13
		UP 1863T K 16	UP1863KJ/000		406,4	16.00	750,0	29.53	4500	1,012	3,53	2.37
ABRASION RESISTANT POLYAMIDE [1] AR	CARBON STEEL S	AR 1863T K 3 ¼	AR1863KD/000		82,6	3.25	400,0	15.75	4500	1,012	2,12	1.42
		AR 1863T K 4 ½	AR1863KG/000		114,3	4.50	457,2	18.00	4500	1,012	2,24	1.50
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	STAINLESS STEEL SS	UP 1863T SS K 2 ¼	UP1863SKS/000	18/SS873AB	57,1	2.25	457,2	18.00	3500	787	1,99	1.34
		UP 1863T SS K 3 ¼	UP1863SKD/000		82,6	3.25	457,2	18.00	3500	787	2,11	1.42
		UP 1863T SS K 4 ½	UP1863SKG/000		114,3	4.50	457,2	18.00	3500	787	2,27	1.52
		UP 1863T SS K 7 ½	UP1863SKL/000		190,5	7.50	609,6	24.00	3500	787	2,63	1.76
		UP 1863T SS K 12	UP1863SKN/000		304,8	12.00	609,6	24.00	3500	787	3,11	2.09
		UP 1863T SS K 16	UP1863SKJ/000		406,4	16.00	750,0	29.53	3500	787	3,47	2.33

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH


Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


PLASTIC FLIGHTS
1" PITCH ROLLER CHAIN WITH INTEGRATED BEARINGS
THICKNESS 4,8 mm (0.189")
HINGE 41,3 mm (1.626")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY



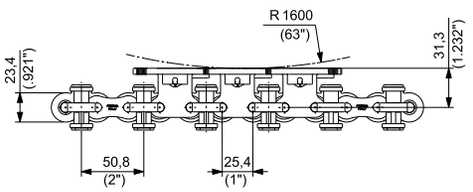

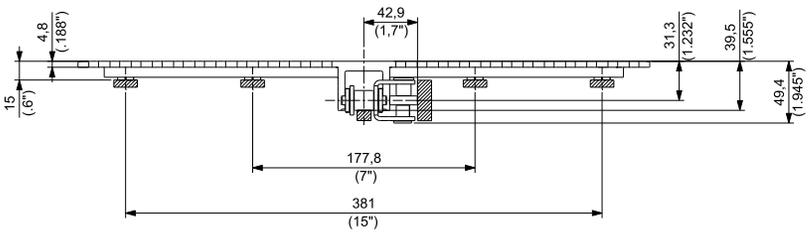

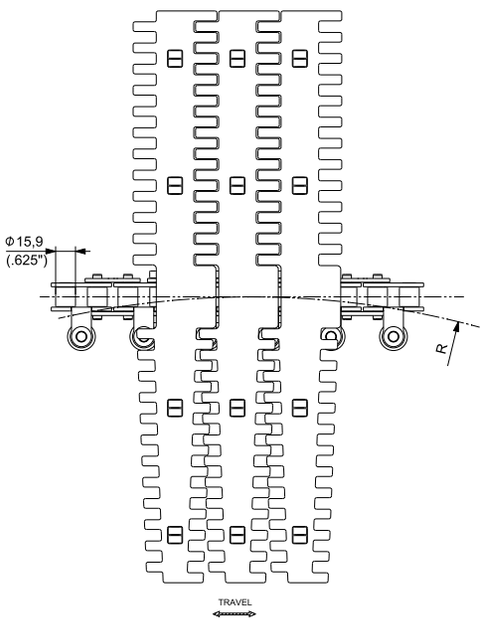


Materials see page 14
Sprockets see page 155
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL	UP 1883 K 18	UP1883KZB/000	18/80SB-007	457,2	18	650	25.59	6500	1,461	7,30	4.91


Standard packaging: Rolls of 1,524 m (5 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

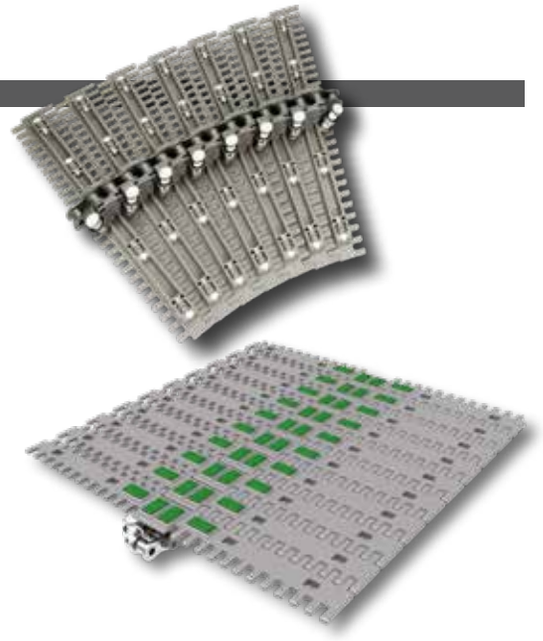


RUBBERIZED TOP PLASTIC FLIGHTS
1" PITCH ROLLER CHAIN WITH INTEGRATED BEARINGS
THICKNESS 4,8 mm (0.189")
HINGE 41,3 mm (1.626")


POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

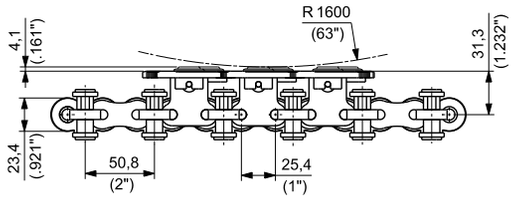

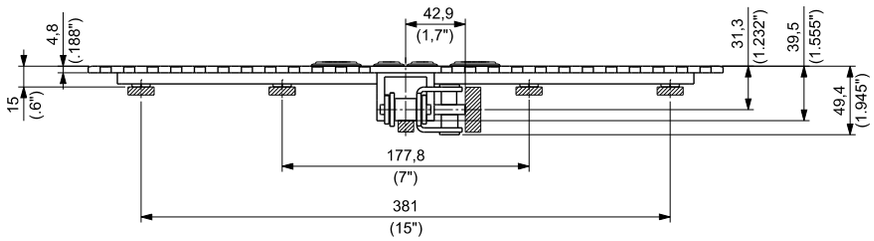


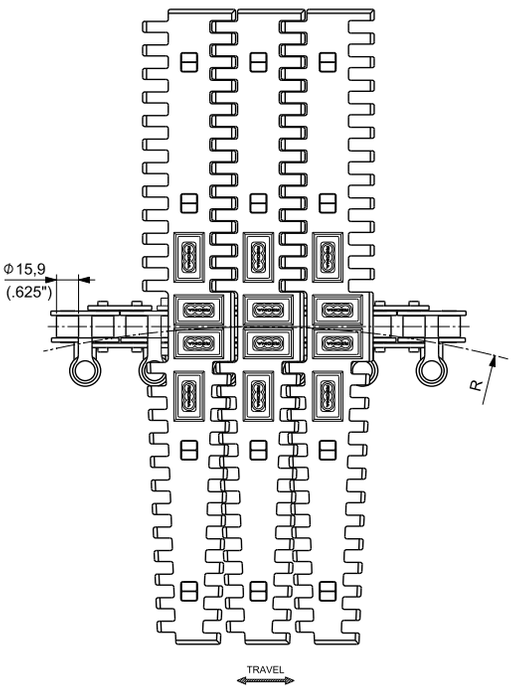

4- RUBBER PAD VERSION

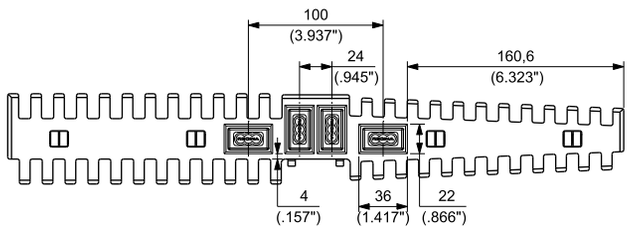

8- RUBBER PAD VERSION

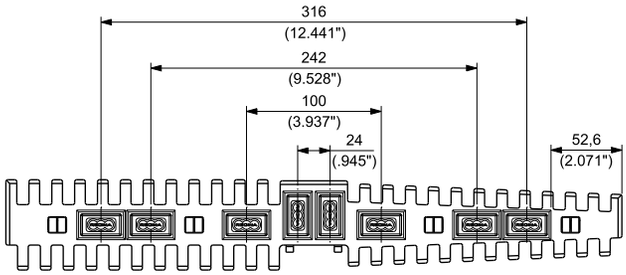

Materials see page 14
Sprockets see page 155
Applications see page 22

Flight	MATERIALS Base Chain	MATERIALS Rubber	ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK	WIDTH W mm	WIDTH W inch	SIDEFLEXING RADIUS R mm	SIDEFLEXING RADIUS R inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	CARBON STEEL S	THERMOPLASTIC **TPE** Hardness: 70 ShA	HFX 1883 UP K 18 (4-Rubber pad version)	HFX1883UPKZB/000	18/80SB-007	457,2	18	650	25.59	6500	1,461	7,54	5.08
			HFX 1883 UP K 18 (8-Rubber pad version)	HFX1883UPKZB/001	18/80SB-007	457,2	18	650	25.59	6500	1,461	7,75	5.22

Standard packaging: Rolls of 1,524 m (5 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

Gripper Chains



INDUSTRIES AND APPLICATIONS

GRIPPER CHAINS

Suitable for handling plastic and glass bottles, aluminum and steel cans through an elevated path.

INDUSTRIES

Bottling and canning

Glass manufacturing

Container manufacturing

Food filling

APPLICATIONS

Elevator

Lowerator

Pass through conveyors

Rinsers





FEATURES


- Powered by ASA 40 and ASA 60 base roller chains made by REGINA in Italy. In particular:

  - Stainless steel chain prelubricated with high performance lube suitable for the food industry (USDA H1 approved) which guarantees long-lasting effect for the chain.

  - ENDURO maintenance free chain that eliminates need for periodic lubrication.

- Wide range of rubber pads exerting an ideal and fine-tuned force on the products for each specific application.

- Reliable fixing system of gripper to the flight.

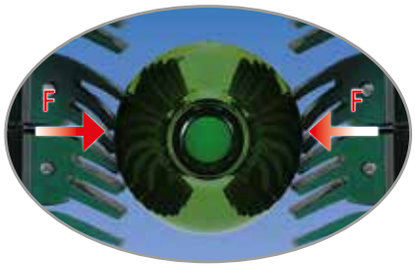

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

Available with ENDURO maintenance free base chains.

- "Heavy wall" sintered bushing, impregnated with USDA H1 food approved oil
- Hard plated pin
- Galvanically coated plates and rollers for resistance to mildly aggressive environment





- Sintered bushing, impregnated with high performance lubricant
- Optimized bushing wall thickness for increased wear performance


BENEFITS

- DRAMATIC WEAR LIFE INCREASE COMPARED TO STANDARD CHAINS IN UN-LUBRICATED CONDITIONS
- ELIMINATE NEED FOR PERIODIC LUBRICATION
- NO PRODUCT OR EQUIPMENT CONTAMINATION
- RESISTANCE TO CORROSION IN MILDLY AGGRESSIVE ENVIRONMENT
- SAVINGS IN LUBRICATION AND MAINTENANCE COSTS



Comparative wear test - 16B-1 chains with sintered bushings.

Regina Catene Calibrate S.p.A. - Laboratory 13/07/2011

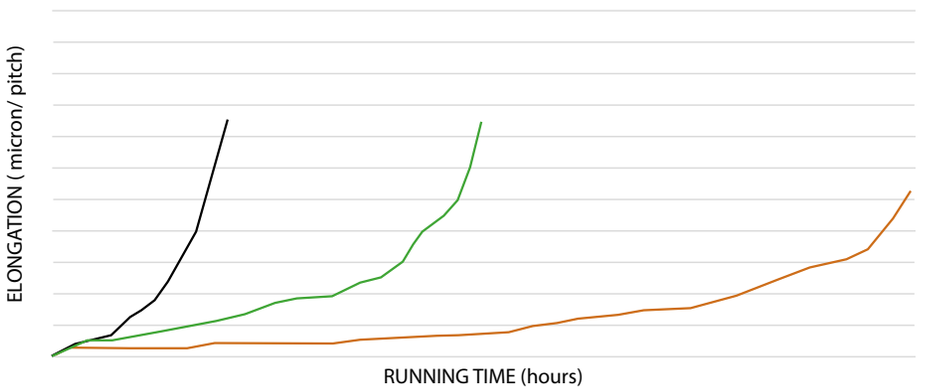

16B-1 REGINA STAINLESS STEEL chain with factory pre-lubrication (no relubrication)
16B-1 REGINA STANDARD chain with factory pre-lubrication (no relubrication)
16B-1 Maintenance free chain - REGINA Enduro series - code 147BS




TEST CONDITIONS
Rpm: 234
Sprockets: z1=15 z2=15
Chain pull: 3'432 N (350kg)
Chain speed: 1,50 m/s
Specific pressure pin/bushing: 17 N/mm²
No lubrication during the test

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB STEEL FLIGHTS
¾ " PITCH ROLLER CHAIN
SHORT FINGERS RUBBER PAD
THICKNESS 3 mm (0.118")
HINGE 31,8 mm (1.252")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY



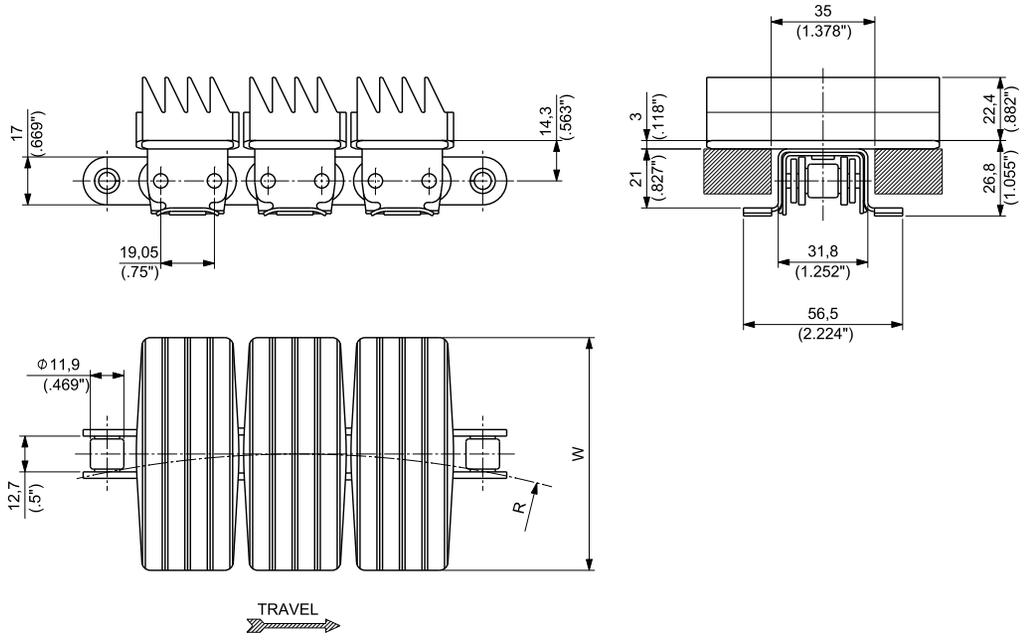

Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CARBON STEEL S	EPDM EPDM Hardness: 60 ShA	GV 1874T K 3 ¼	GV1874KD/010	18/0873	82,6	3.25	381	15	4500	1,012	5,65	3.79
			GV 1874T K 4 ½	GV1874KG/010		114,3	4.50	381	15	4500	1,012	6,71	4.51
STAINLESS STEEL SS	STAINLESS STEEL SS	EPDM EPDM Hardness: 60 ShA	GV 1874T SS K 3 ¼	GV1874SKD/010	18/SS873AB	82,6	3.25	381	15	3500	787	5,57	3.74
			GV 1874T SS K 4 ½	GV1874SKG/010		114,3	4.50	381	15	3500	787	6,63	4.46

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TWO-PIECE GRIPPER CHAINS - **EV 1874T SERIES**

TAB STEEL FLIGHTS
¾" PITCH ROLLER CHAIN
LONG FINGERS RUBBER PAD
THICKNESS 3 mm (0.118")
HINGE 31,8 mm (1.252")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY



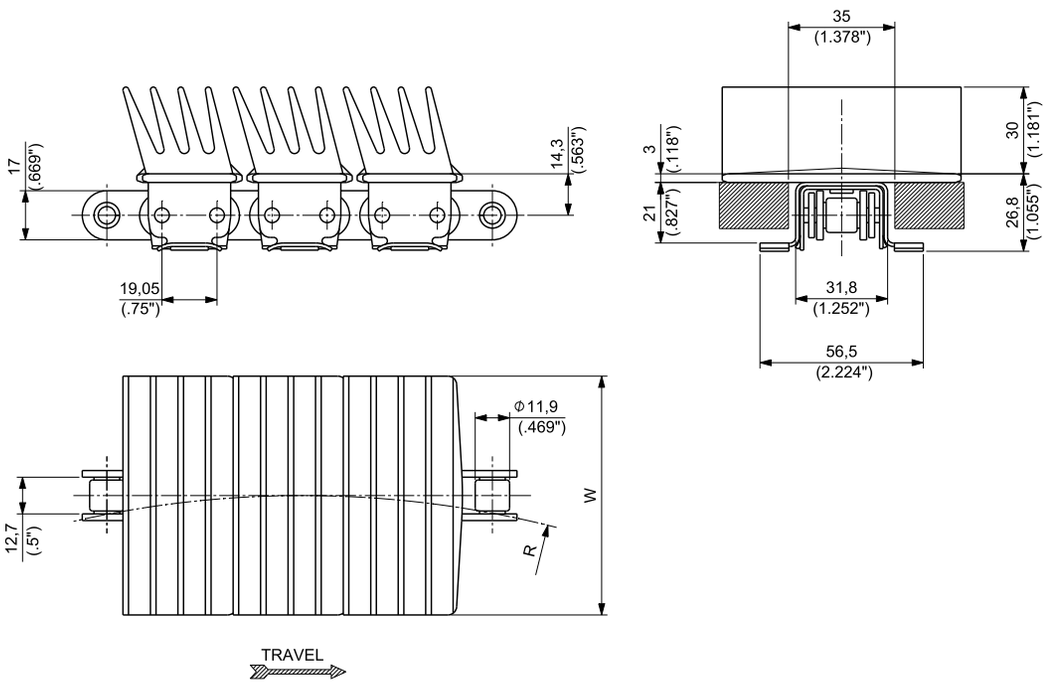


Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base Chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
CARBON STEEL S	CARBON STEEL S	EPDM EPDM Hardness: 60 ShA	EV 1874T K 3 ¼	EV1874KD/010	18/0873	82,6	3.25	381	15	4500	1,012	5,67	3.81
STAINLESS STEEL SS	STAINLESS STEEL SS	EPDM EPDM Hardness: 60 ShA	EV 1874T SS K 3 ¼	EV1874SKD/010	18/SS873AB	82,6	3.25	381	15	3500	787	5,60	3.76

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB PLASTIC FLIGHTS
¾ " PITCH ROLLER CHAIN
SHORT FINGERS RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

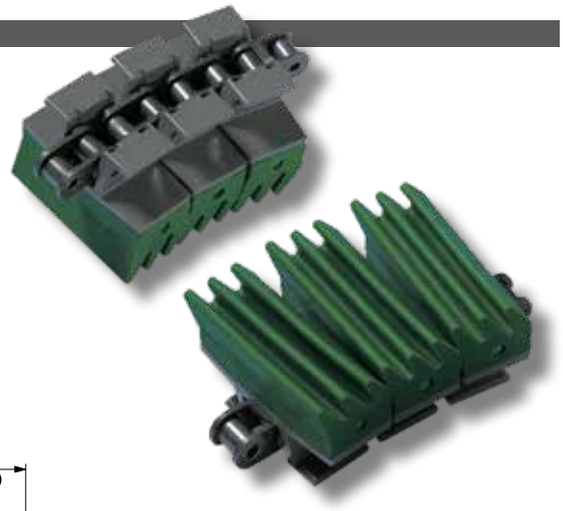

DUPONT® KEVLAR® INSIDE

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

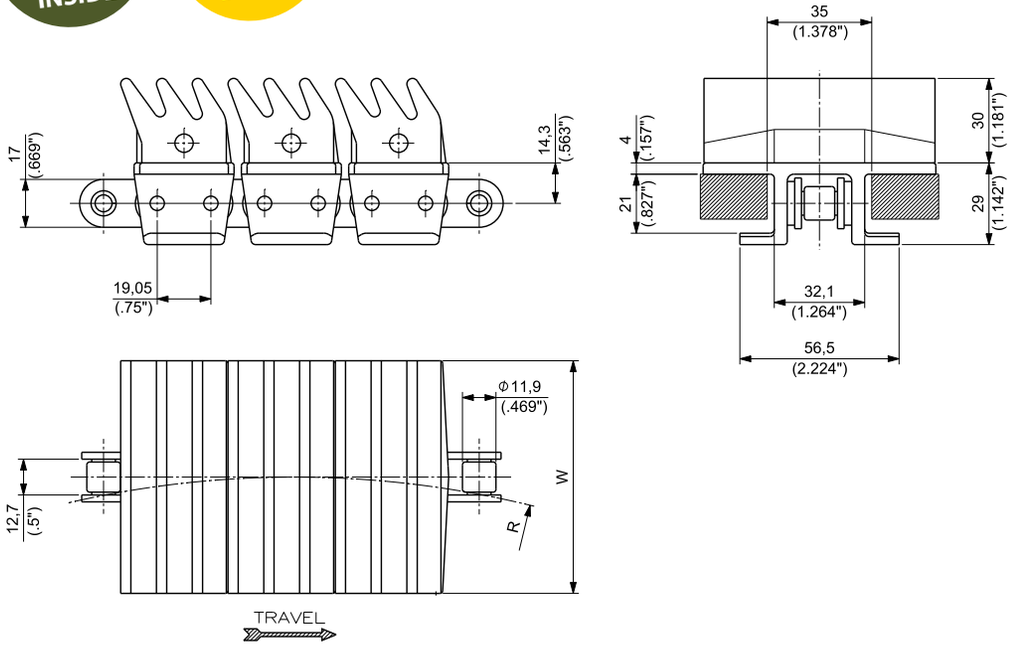

Materials see page 14 | Sprockets see page 154 | Corner tracks see page 344 | Applications see page 22

Flight	Base chain	Rubber	ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W mm	WIDTH W inch	SIDEFLEXING RADIUS R mm	SIDEFLEXING RADIUS R inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	GW 1873T UP K 3 ¼	GW1873KD/000	18/0873	82,6	3.25	355,6	14	4500	1012	4,05	2.72
	STAINLESS STEEL SS		GW 1873T UP SS K 3 ¼	GW1873SKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	4,00	2.69
	MAINTENANCE FREE CARBON STEEL BS		GW 1873T UP BS K 3 ¼	GW1873UPBKD/000	18/873BS	82,6	3.25	355,6	14	3500	787	4,06	2.73
SPECIAL DELRIN® REINFORCED WITH KEVLAR® DK2	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	GW 1873T D2K K 3 ¼	GW1873D2KKD/000	18/0873	82,6	3.25	355,6	14	4500	1012	4,05	2.72
	STAINLESS STEEL SS		GW 1873T D2K SS K 3 ¼	GW1873D2KSKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	4,00	2.69
	MAINTENANCE FREE CARBON STEEL BS		GW 1873T D2K BS K 3 ¼	GW1873D2KBKD/000	18/873BS	82,6	3.25	355,6	14	3500	787	4,06	2.73

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


TWO-PIECE GRIPPER CHAINS - **EW 1873T SERIES**

TAB PLASTIC FLIGHTS
¾ " PITCH ROLLER CHAIN
LONG FINGERS RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

DK2™ DUPONT® KEVLAR® INSIDE

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

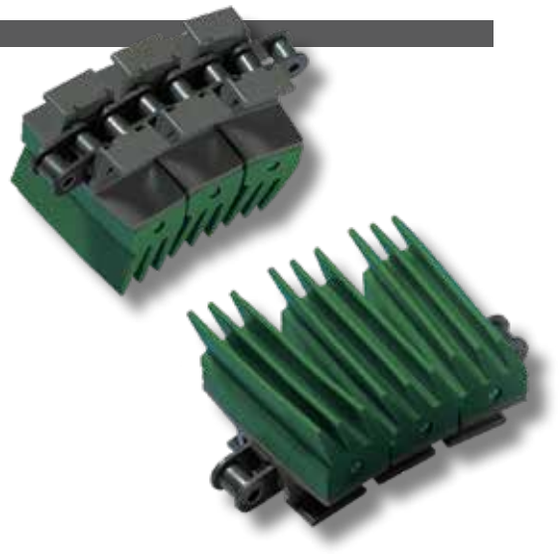

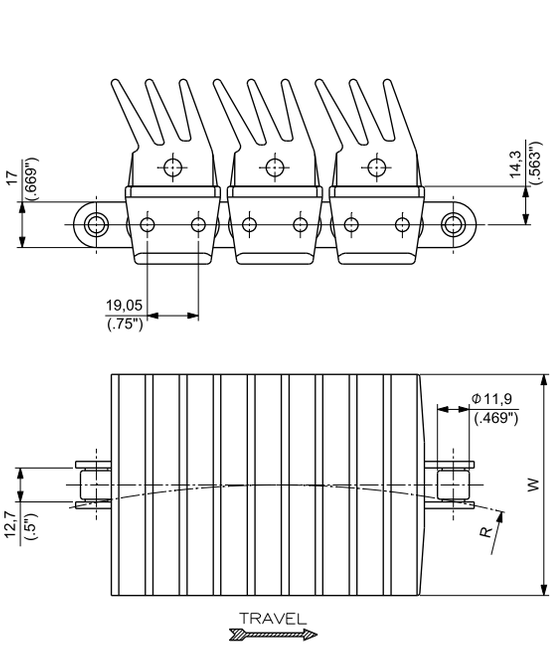


Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

Flight	Base chain	Rubber	ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W mm	WIDTH W inch	SIDEFLEXING RADIUS R mm	SIDEFLEXING RADIUS R inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	CARBON STEEL S		EW 1873T UP K 3 ¼	EW1873KD/000	18/0873	82,6	3.25	355,6	14.00	4500	1012	4,16	2.80
			EW 1873T UP K 4 ½	EW1873UPKG/000		114,3	4.50	355,6	14.00	4500	1012	4,94	3.32
	STAINLESS STEEL SS	THERMOPLASTIC TPE Hardness: 50 ShA	EW 1873T UP SS K 3 ¼	EW1873SKD/000	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,11	2.76
			EW 1873T UP SS K 4 ½	EW1873UPSKG/000		114,3	4.50	355,6	14.00	3500	787	4,89	3.29
	MAINTENANCE FREE CARBON STEEL BS		EW 1873T UP BS K 3 ¼	EW1873UPBKD/000	18/873BS	82,6	3.25	355,6	14.00	3500	787	4,17	2.80
			EW 1873T UP BS K 4 ½	EW1873UPBKG/000		114,3	4.50	355,6	14.00	3500	787	4,95	3.33
	STAINLESS STEEL SS	HEAT STABILZED THERMOPLASTIC HS Hardness: 45 ShA	EW 1873T UP HS SS K 3 ¼	EW1873HSSKD/003	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,37	2.94
SPECIAL DELRIN® REINFORCED WITH KEVLAR® DK2™	CARBON STEEL S		EW 1873T D2K K 3 ¼	EW1873D2KKD/000	18/0873	82,6	3.25	355,6	14.00	4500	1012	4,16	2.80
			EW 1873T D2K K 4 ½	EW1873D2KKG/000		114,3	4.50	355,6	14.00	4500	1012	4,94	3.32
	STAINLESS STEEL SS	THERMOPLASTIC TPE Hardness: 50 ShA	EW 1873T D2K SS K 3 ¼	EW1873D2KSKD/000	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,11	2.76
			EW 1873T D2K SS K 4 ½	EW1873D2KSKG/000		114,3	4.50	355,6	14.00	3500	787	4,89	3.29
	MAINTENANCE FREE CARBON STEEL BS		EW 1873T D2K BS K 3 ¼	EW1873D2KBKD/000	18/873BS	82,6	3.25	355,6	14.00	3500	787	4,17	2.80
			EW 1873T D2K BS K 4 ½	EW1873D2KBKG/000		114,3	4.50	355,6	14.00	3500	787	4,95	3.33
	STAINLESS STEEL SS	HEAT STABILZED THERMOPLASTIC HS Hardness: 45 ShA	EW 1873T D2K HS SS K 3 ¼	EW1873HSSKD/002	18/SS873AB	82,6	3.25	355,6	14.00	3500	787	4,37	2.94

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

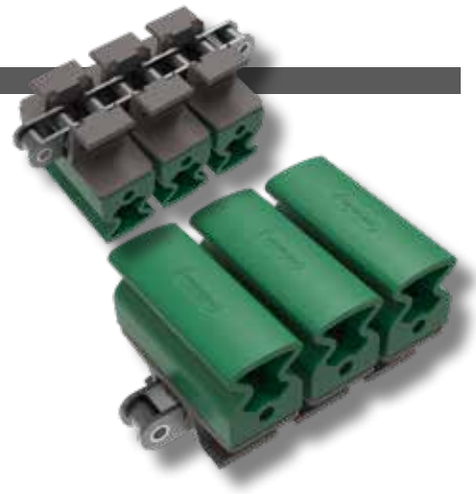


NEW

TAB PLASTIC FLIGHTS
¾ " PITCH ROLLER CHAIN
SPECIAL D-SHAPE RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

DUPONT® KEVLAR® INSIDE

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

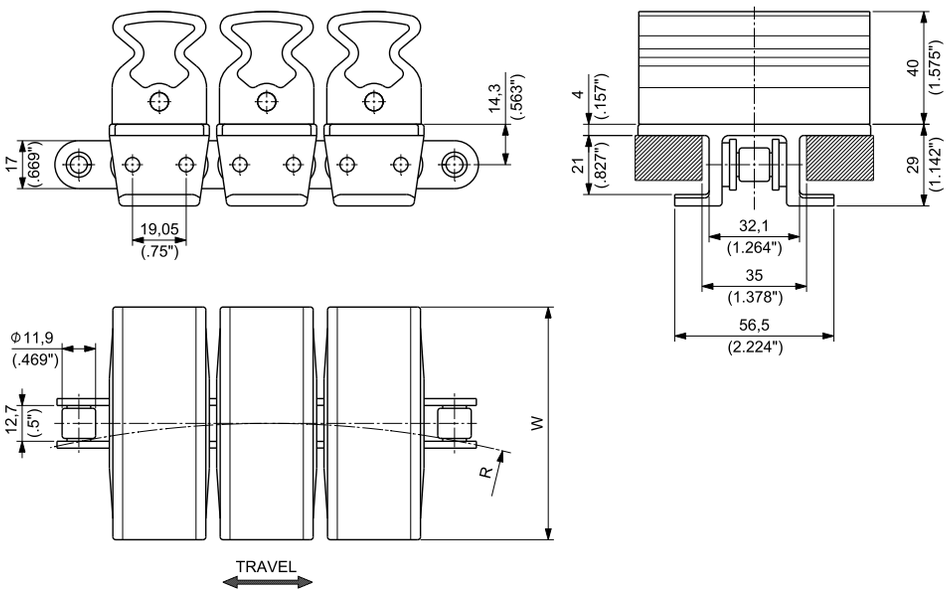


Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

Flight	MATERIALS Base chain	MATERIALS Rubber	ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W mm	WIDTH W inch	SIDEFLEXING RADIUS R mm	SIDEFLEXING RADIUS R inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	GS 1873T UP K 3 ¼	GS1873UPKD/000	18/0873	82,6	3.25	355,6	14	4500	1012	4,02	2.70
	STAINLESS STEEL SS		GS 1873T UP SS K 3 ¼	GS1873UPSKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	3,97	2.67
	MAINTENANCE FREE CARBON STEEL BS		GS 1873T UP BS K 3 ¼	GS1873UPBKD/000	18/873BS	82,6	3.25	355,6	14	3500	787	4,03	2.71
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	GS 1873T D2K K 3 ¼	GS1873D2KKD/000	18/0873	82,6	3.25	355,6	14	4500	1012	4,02	2.70
	STAINLESS STEEL SS		GS 1873T D2K SS K 3 ¼	GS1873D2KSKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	3,97	2.67
	MAINTENANCE FREE CARBON STEEL BS		GS 1873T D2K BS K 3 ¼	GS1873D2KBKD/000	18/873BS	82,6	3.25	355,6	14	3500	787	4,03	2.71

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


TWO-PIECE GRIPPER CHAINS - **GD 1873T SERIES**

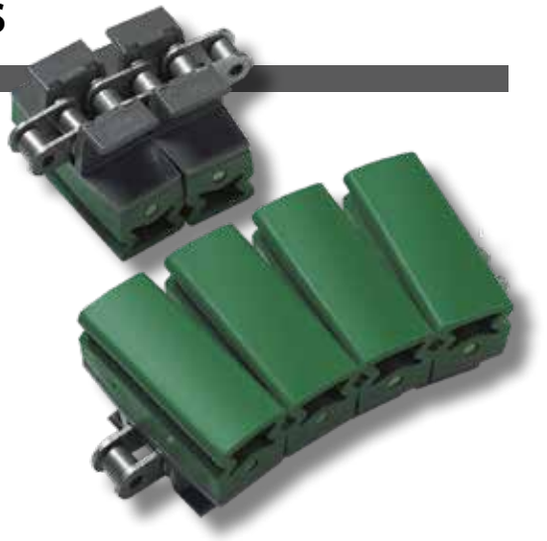

TAB PLASTIC FLIGHTS
¾" PITCH ROLLER CHAIN
D-SHAPE RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

DUPONT® KEVLAR® INSIDE

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

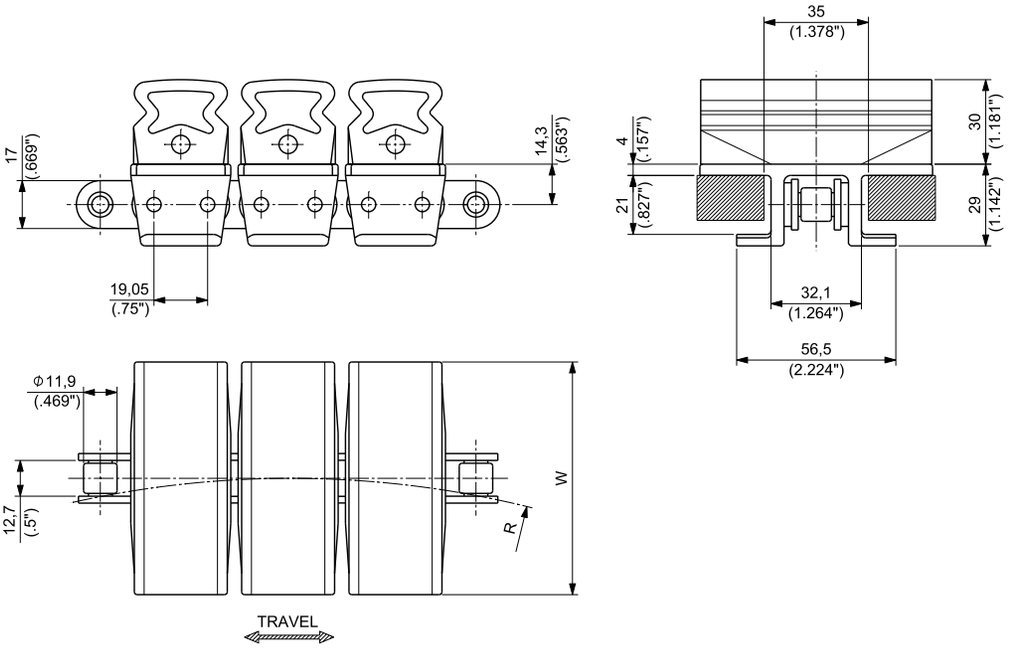


Materials see page 14
Sprockets see page 154
Corner tracks see page 344
Applications see page 22

Flight	MATERIALS Base chain	Rubber	ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W mm	inch	SIDEFLEXING RADIUS mm R	inch	WORKING LOAD (25°C/77°F) N	lbs	WEIGHT kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	GD 1873T UP K 3 ¼	GD1873UPKD/000	18/0873	82,6	3.25	355,6	14	4500	1012	3,84	2.58
	STAINLESS STEEL SS		GD 1873T UP SS K 3 ¼	GD1873UPSKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	3,79	2.55
	MAINTENANCE FREE CARBON STEEL BS		GD 1873T UP BS K 3 ¼	GD1873UPBKD/000	18/873BS	82,6	3.25	355,6	14	3500	787	3,85	2.59
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	GD 1873T D2K K 3 ¼	GD1873D2KKD/000	18/0873	82,6	3.25	355,6	14	4500	1012	3,84	2.58
	STAINLESS STEEL SS		GD 1873T D2K SS K 3 ¼	GD1873D2KSKD/000	18/SS873AB	82,6	3.25	355,6	14	3500	787	3,79	2.55
	MAINTENANCE FREE CARBON STEEL BS		GD 1873T D2K BS K 3 ¼	GD1873D2KBKD/000	18/873BS	82,6	3.25	355,6	14	3500	787	3,85	2.59


Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

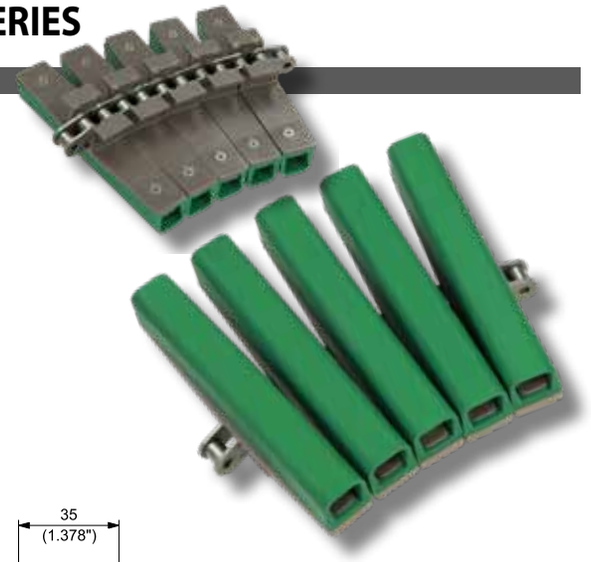

TAB PLASTIC FLIGHTS
¾ " PITCH ROLLER CHAIN
D-SHAPE RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

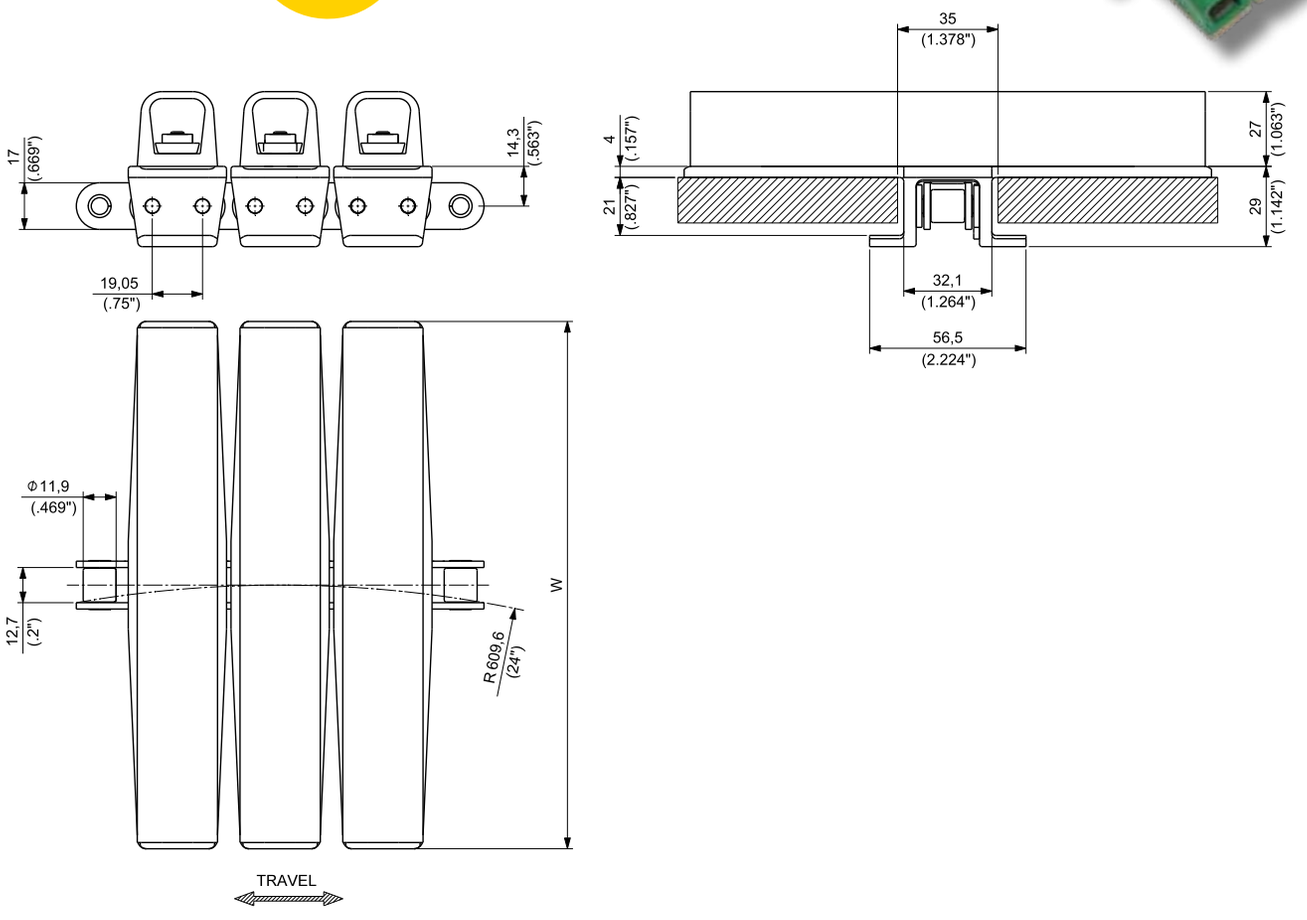

Materials see page 14
Sprockets see page 154
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	STAINLESS STEEL SS	THERMOPLASTIC TPE Hardness: 50 ShA	GD 1873T UP SS K 7 ½	GD1873UPSKL/000	18/SS873AB	190,5	7.50	609,6	24	3500	787	4,90	3.29
		HEAT STABILIZED THERMOPLASTIC HS Hardness: 70 ShA	GD 1873T UP H SS K 7 ½	GD1873UPHSKL/000	18/SS873AB	190,5	7.50	609,6	24	3500	787	5,26	3.53

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


TWO-PIECE GRIPPER CHAINS - **GC 1873T SERIES**




TAB PLASTIC FLIGHTS
¾" PITCH ROLLER CHAIN
"HOUSE"-SHAPED RUBBER PAD
THICKNESS 4 mm (0.157")
HINGE 32,1 mm (1.264")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

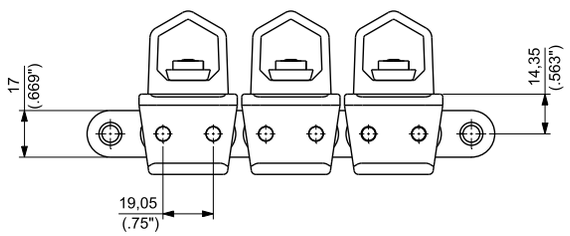

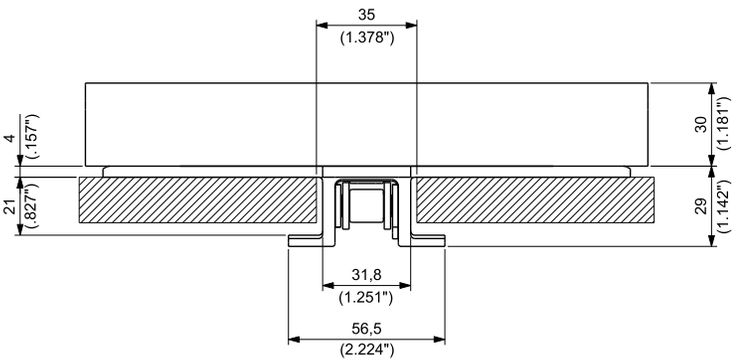

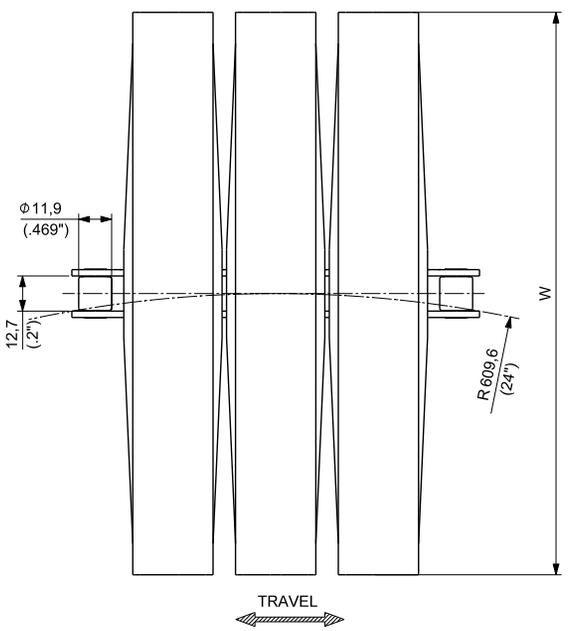


Materials see page 14
Sprockets see page 154
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	STAINLESS STEEL SS	THERMOPLASTIC TPE Hardness: 50 ShA	GC 1873T UP SS K 8	GC1873UPSKV/000	18/SS873AB	203,2	8	609,6	24	3500	787	4,90	3.29
		HEAT STABILIZED THERMOPLASTIC HS Hardness: 70 ShA	GC 1873T UP H SS K 8	GC1873UPHSKV/000	18/SS873AB	203,2	8	609,6	24	3500	787	5,26	3.53


Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

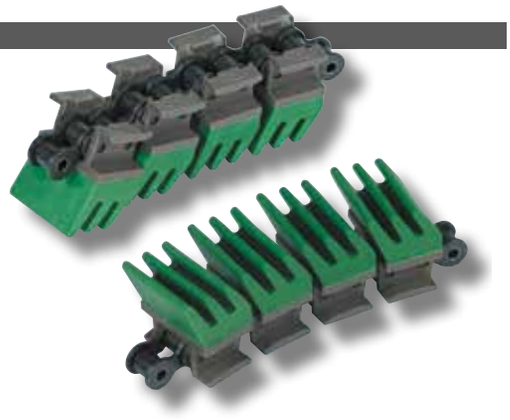

TAB PLASTIC FLIGHTS
½ " PITCH ROLLER CHAIN
LONG FINGERS RUBBER PAD
THICKNESS 3,3 mm (0.130")
HINGE 19,85 mm (0.781")

POWERED BY BASE ROLLER CHAIN MADE BY REGINA IN ITALY

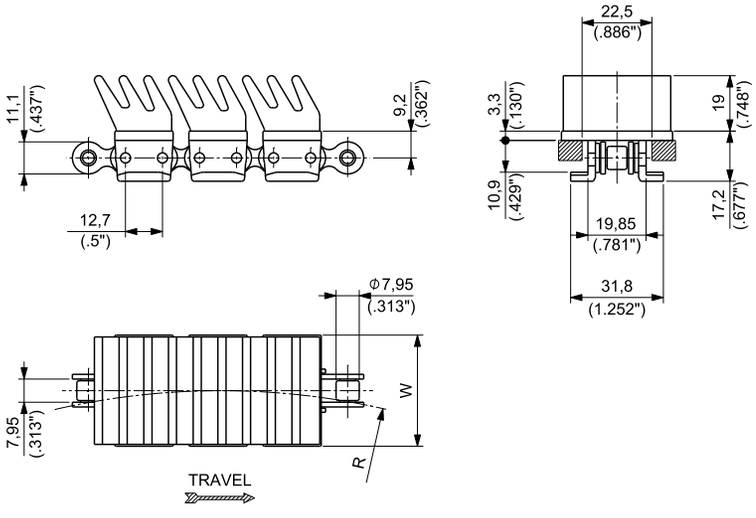


Materials see page 14
Sprockets see page 153
Corner tracks see page 344
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	CONNECTING LINK PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Flight	Base chain	Rubber				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	CARBON STEEL S	THERMOPLASTIC TPE Hardness: 50 ShA	EW 1843T UP K 1 ½	EW1843UPKW/000	18/1843	38,1	1.5	254	10	2600	584	1,28	0.86
	STAINLESS STEEL SS		EW 1843T UP SS K 1 ½	EW1843UPSKW/000	18/SS1843	38,1	1.5	254	10	2000	450	1,29	0.87

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB PLASTIC PLATES
SHORT FINGERS RUBBER PAD
REDUCED SIDEFLEXING RADIUS
THICKNESS 4,8 mm (0.189")
HINGE 42,9 mm (1.689")

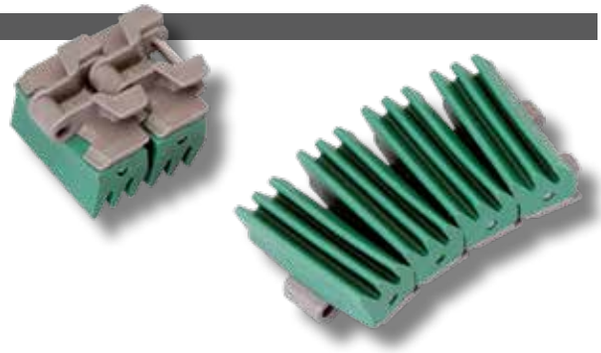

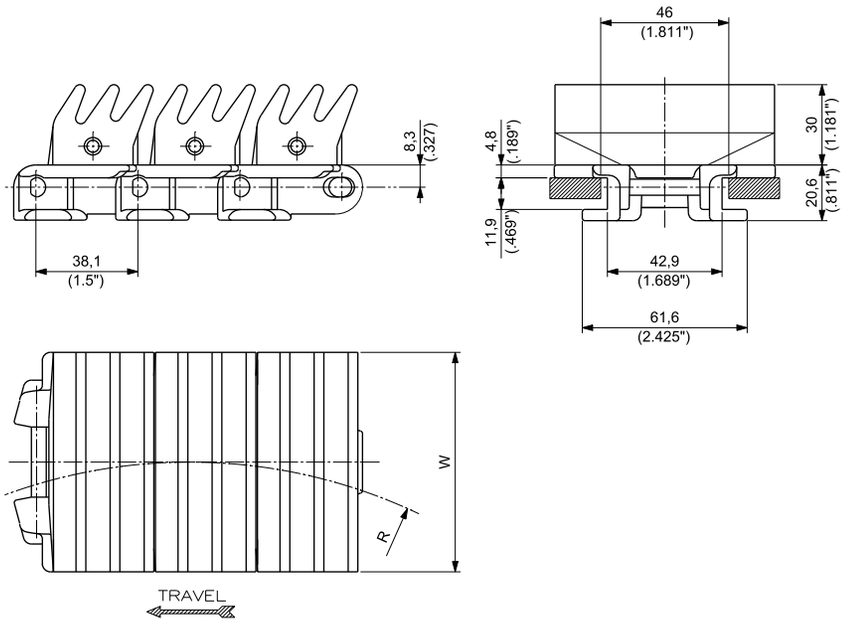


Materials see page 14
Sprockets see pages 147÷149
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 50 ShA	GW 878T UP K 3 ¼	GW878UPKD/000	82,6	3.25	250	9.84	2000	450	3,38	2.27

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB PLASTIC PLATES
LONG FINGERS RUBBER PAD
REDUCED SIDEFLEXING RADIUS
THICKNESS 4,8 mm (0.189")
HINGE 42,9 mm (1.689")

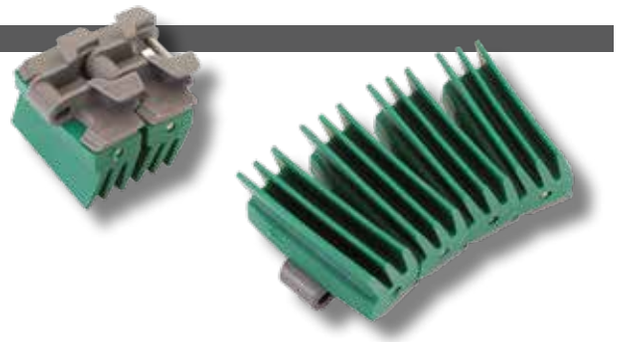

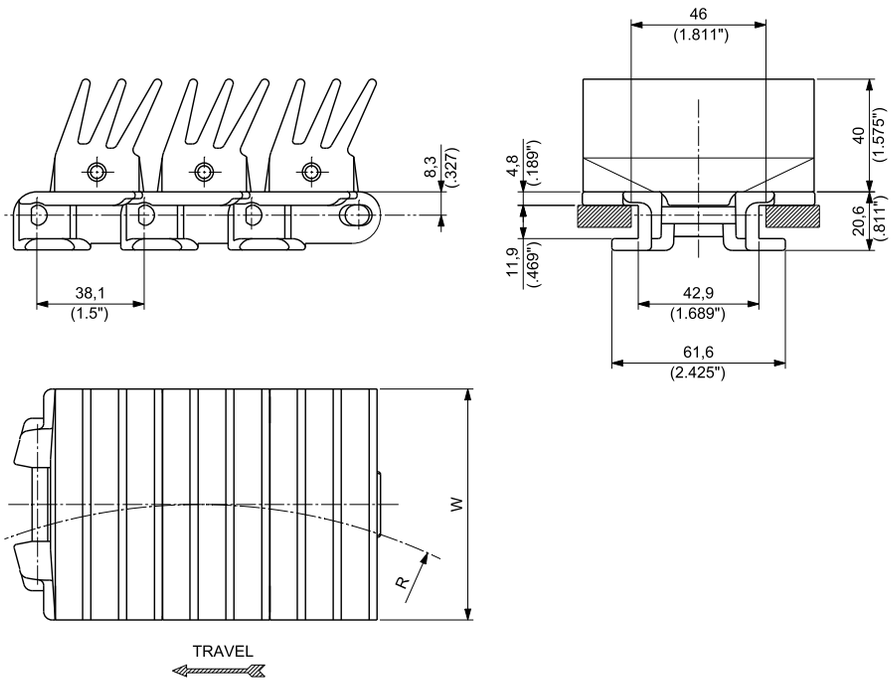


Materials see page 14
Sprockets see pages 147÷149
Applications see page 22


MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 50 ShA	EW 878T UP K 3 ¼	EW878UPKD/000	82,6	3.25	250	9.84	2000	450	3,38	2.27

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB PLASTIC PLATES
D-SHAPE RUBBER PAD
REDUCED SIDEFLEXING RADIUS
THICKNESS 4,8 mm (0.189")
HINGE 42,9 mm (1.689")

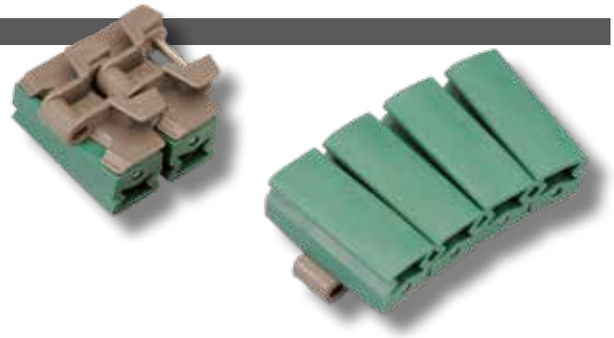

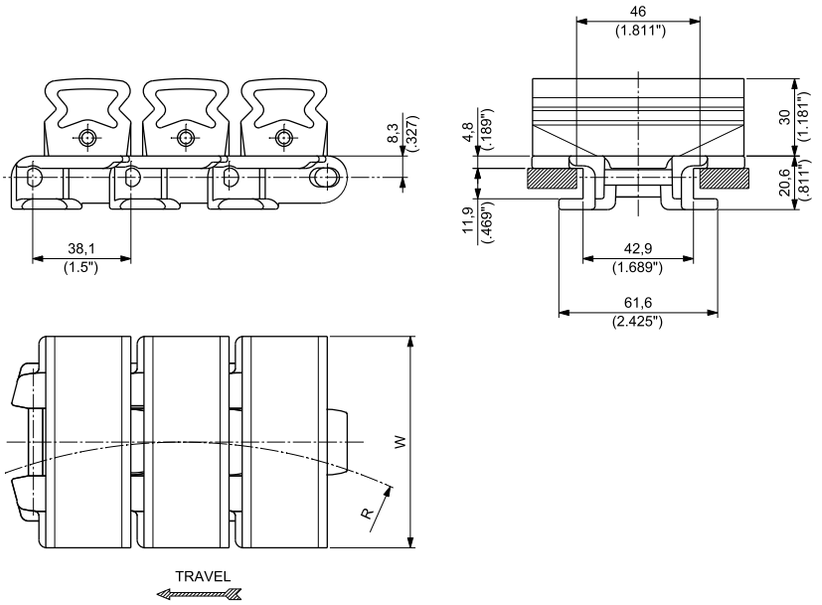

Materials see page 14
Sprockets see pages 147÷149
Applications see page 22

MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	THERMOPLASTIC TPE Hardness: 50 ShA	GD 878T UP K 3 ¼	GD878UPKD/000	82,6	3.25	250	9.84	2000	450	3,38	2.27

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

LBP Chains
(Low Back-Line Pressure)



INDUSTRIES AND APPLICATIONS

LBP CHAINS

Suitable for handling packaged products like cartons, shrink packs, crates.

INDUSTRIES

Bottling and canning

Food filling

Warehouse & distribution

APPLICATIONS

Packaged product convey in accumulation sections



FEATURES

- High ratio in outside/inside roller diameter: better rotation capability and lower coefficient of friction with products are guaranteed.



- UP material rollers paired with premium surface finish of stainlees steel pins minimize friction preventing product damage caused by the accumuation force.

- On larger chain widths additional supports for pins keep a flat handling surface for the maximum product stability.




- Availability of modular transfer plates with rollers to guarantee a smooth product head transfer between two conveyors (see page 334).




Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

DOUBLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 136,5 mm (5.374")



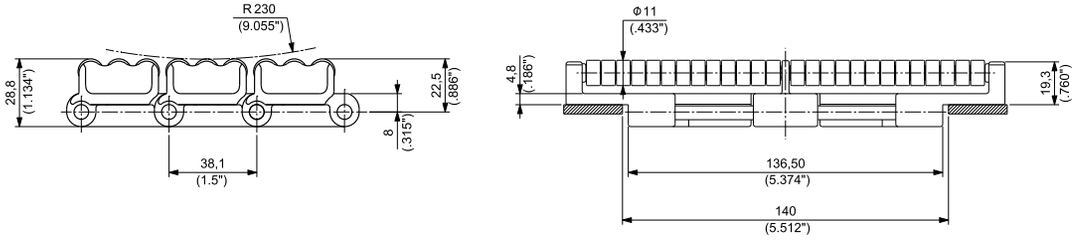

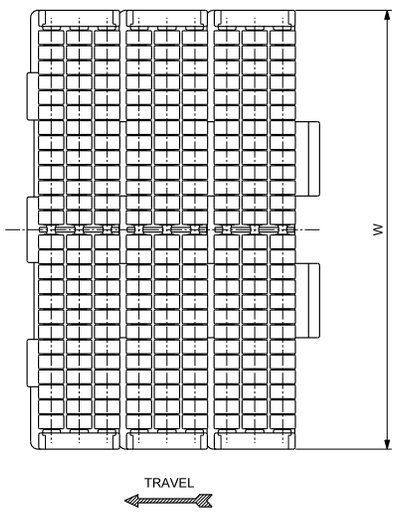

Materials see page 14
Sprockets see pages 145÷146
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	LBP 821 UP K 7 ½	LBP821UPKL/000	190,5	7.50	4,8	0.19	2750	618	5,63	3.78
		LBP 821 UP K 10	LBP821UPKM/000	254,0	10.00	4,8	0.19	2750	618	7,07	4.75
		LBP 821 UP K 12	LBP821UPKN/000	304,8	12.00	4,8	0.19	2750	618	8,22	5.53


Standard packaging:
Rolls of 1,524 m (5 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

STRAIGHT RUNNING LBP CHAINS - **LBP 8257 SERIES**



HEAVY DUTY SINGLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")

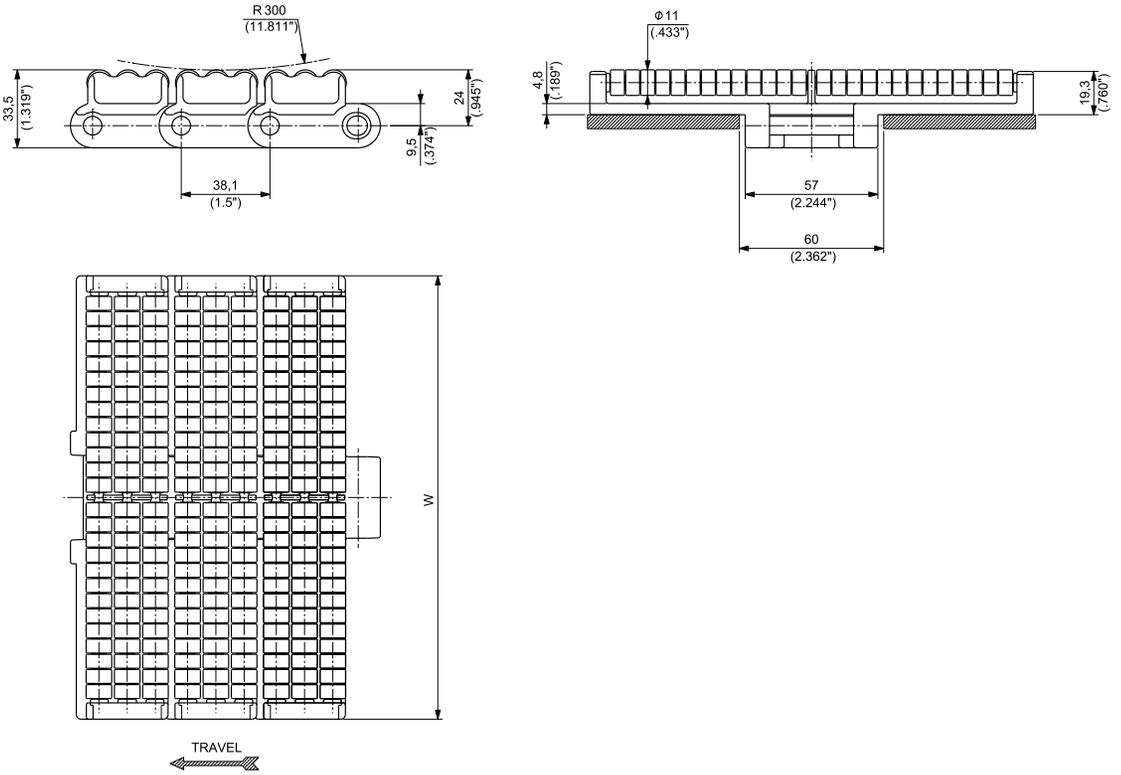

Materials see page 14
Sprockets see pages 150÷151
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	AUSTENITIC STAINLESS STEEL	LBP 8257 UP K 7 ½	LBP8257UPKL/000	190,5	7.50	4,8	0.19	3910	879	5,47	3.68
		LBP 8257 UP K 10	LBP8257UPKM/000	254,0	10.00	4,8	0.19	3910	879	6,93	4.66
		LBP 8257 UP K 12	LBP8257UPKN/000	304,8	12.00	4,8	0.19	3910	879	8,09	5.44


Standard packaging:
Rolls of 1,524 m (5 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
HEAVY DUTY SINGLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")



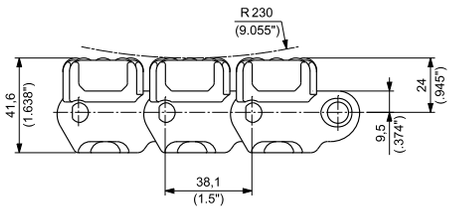

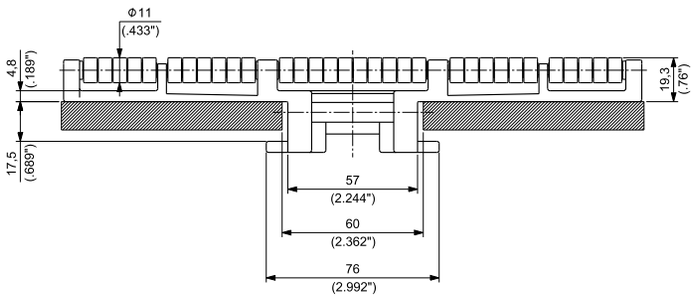

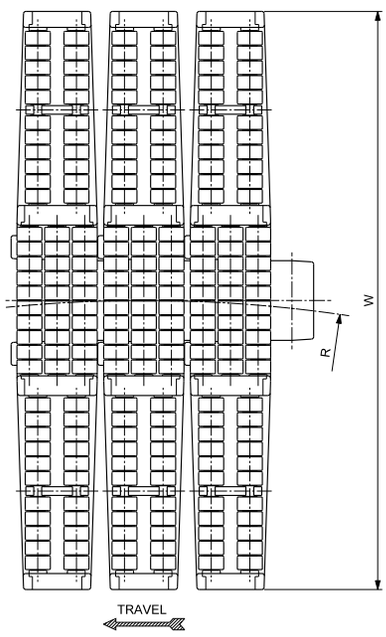

Materials see page 14
Sprockets see pages 150÷152
Corner tracks see page 343
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	LBP 882T UP K 3 ¾	LBP882TUPKEA/000	95,3	3.75	4,8	0.19	667,0	26.26	3910	879	3,51	2.36
		LBP 882T UP K 4 ½	LBP882TUPKG/000	114,3	4.50	4,8	0.19	609,6	24.00	3910	879	3,95	2.65
		LBP 882T UP K 7 ½	LBP882TUPKL/000	190,5	7.50	4,8	0.19	609,6	24.00	3910	879	5,10	3.43
		LBP 882T UP K 10	LBP882TUPKM/000	254,0	10.00	4,8	0.19	609,6	24.00	3910	879	6,38	4.29
		LBP 882T UP K 12	LBP882TUPKN/000	304,8	12.00	4,8	0.19	609,6	24.00	3910	879	6,95	4.67

Standard packaging: Rolls of 1,524 m (5 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MAGNETIC
HEAVY DUTY SINGLE HINGE
PITCH 1 ½" (38,1 mm)
THICKNESS 4,8 mm (0.189")
HINGE 57 mm (2.244")



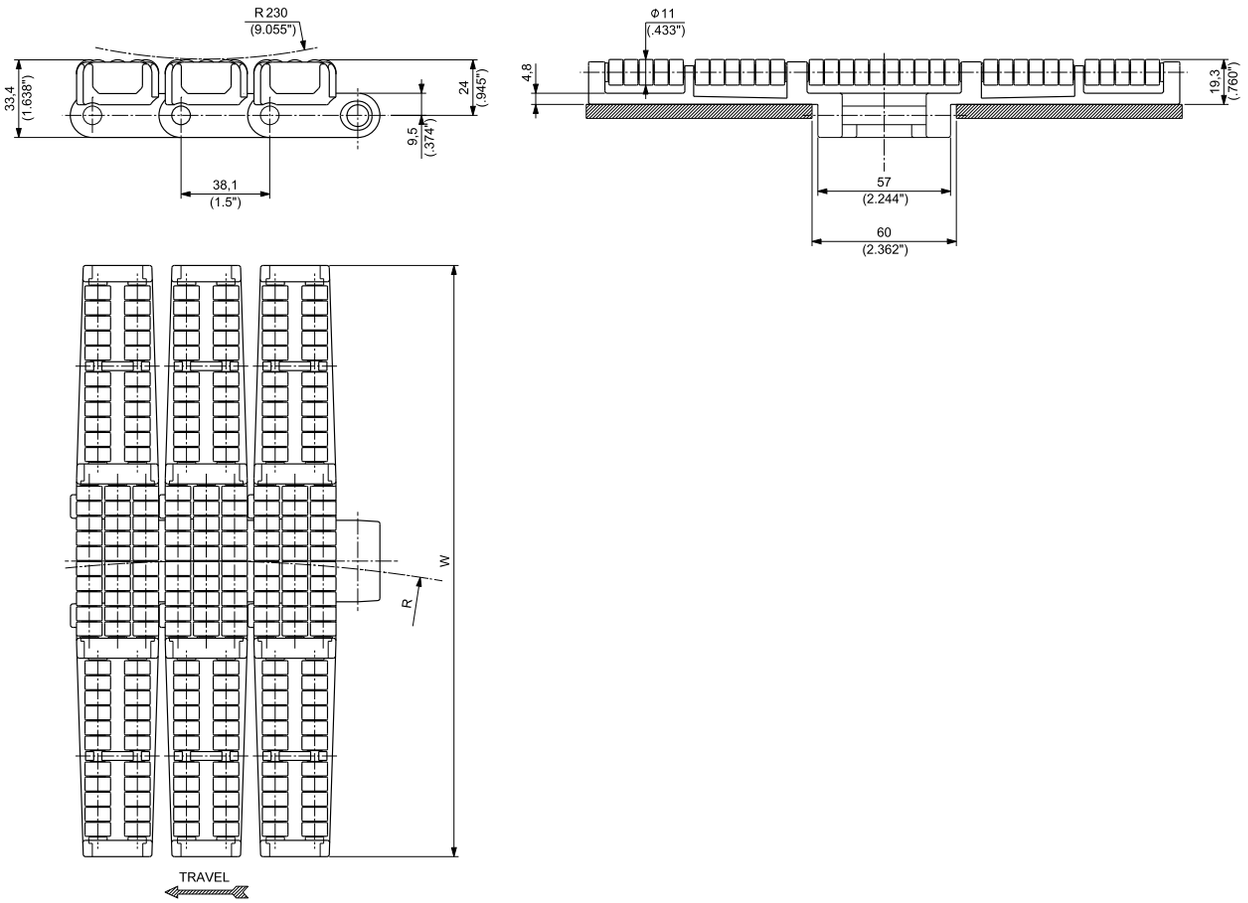

Materials see page 14
Sprockets see pages 150÷151
Corner tracks see page 301
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® **UP**	MAGNETIC STAINLESS STEEL	LBP 882M UP K 7 ½	LBP882MUPKL/000	190,5	7.50	4,8	0.19	609,6	24	3910	879	4,85	3.26
		LBP 882M UP K 10	LBP882MUPKM/000	254,0	10.00	4,8	0.19	609,6	24	3910	879	5,91	3.97
		LBP 882M UP K 12	LBP882MUPKN/000	304,8	12.00	4,8	0.19	609,6	24	3910	879	6,70	4.50

Standard packaging:
Rolls of 1,524 m (5 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN


PERFORMANCE IN MOTION

FliteTop®


Biplanar Chains



INCREASED PRODUCT SUPPORT SURFACE
PITCH 50 mm (1.969")
THICKNESS 4 mm (0.157")

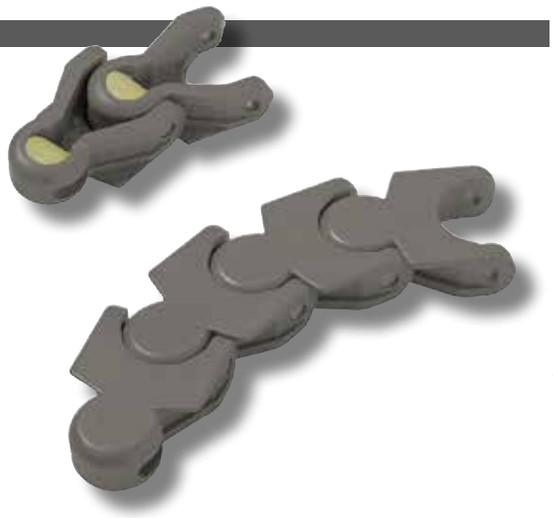

DUPONT® KEVLAR® INSIDE

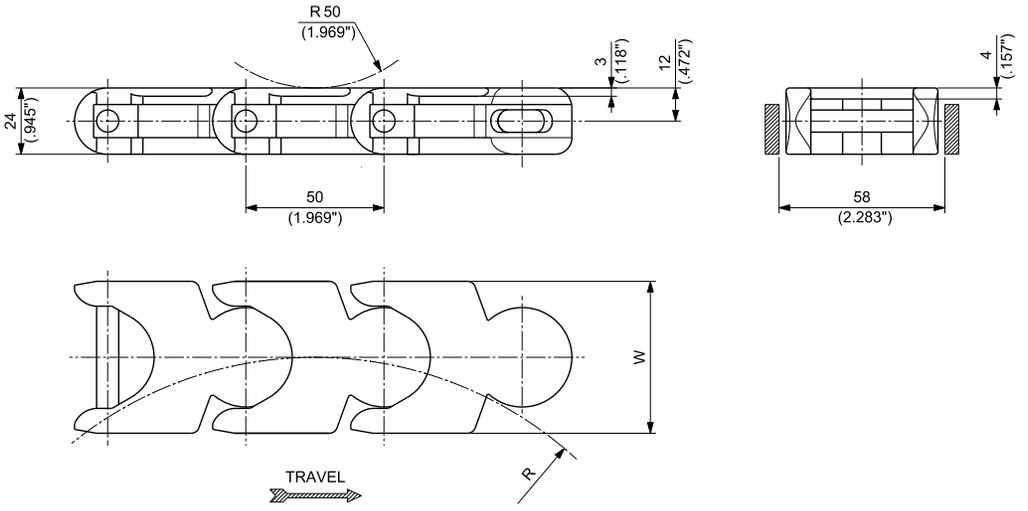

Materials see page 14
Sprockets see pages 156÷157
Turning disc see page 113
Applications see page 22

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
WHITE ACETAL RESIN WA	AUSTENITIC STAINLESS STEEL	C 1700	C1700/000	55	2.17	140	5.51	3000	674	1,34	0.90
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	A 1700	A1700/000	55	2.17	140	5.51	3300	742	1,33	0.89
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 1700A	D2K1700A/000	55	2.17	140	5.51	3000	674	1,33	0.89

Standard packaging:
Rolls of 3,000 m (9.842 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TURNING DISC




Anti-friction turning discs for 1700 series combined with the special thermoplastic chain material allow longer chain runs and multiple turns in applications like:
line accumulation, routing to automatic or manual inspection points, elevation or lowering to automatic or manual inspection points and product distribution.


MATERIALS

DISCS: **PGF** REINFORCED POLYAMIDE


CLOSED VERSION: PART NUMBER **CMT091700A00**

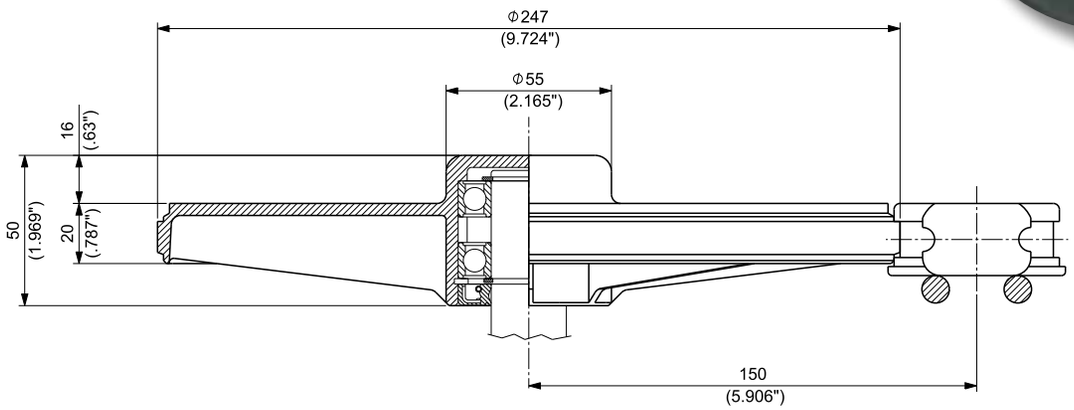

OPEN VERSION: PART NUMBER **CMT091700C00**

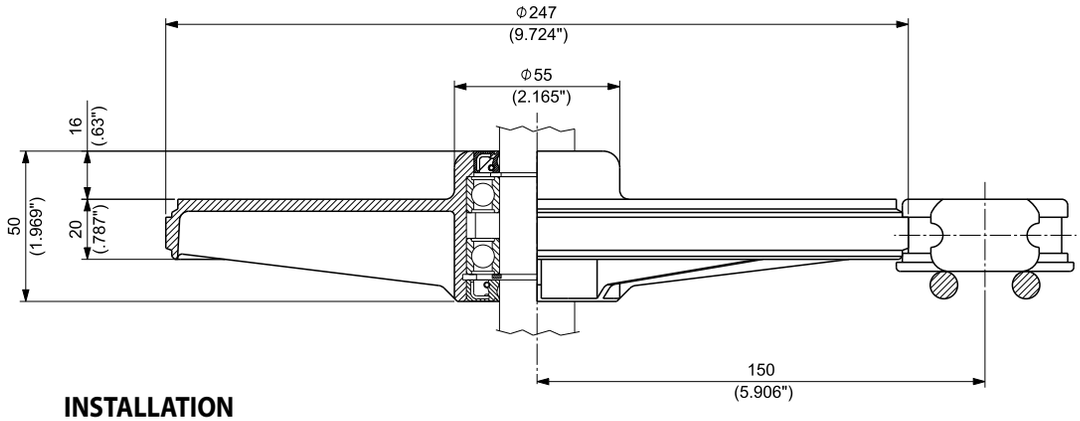

INSTALLATION

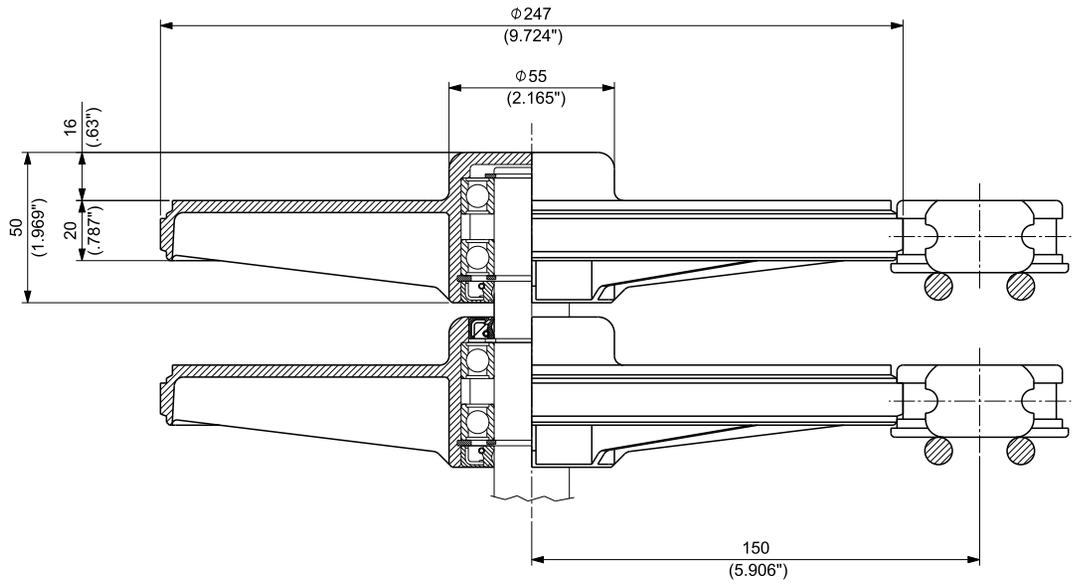

UPPER PART


RETURN PART

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


TURNING DISC

SHAFT AND TURNING DISC DIMENSIONS:


CLOSED VERSION

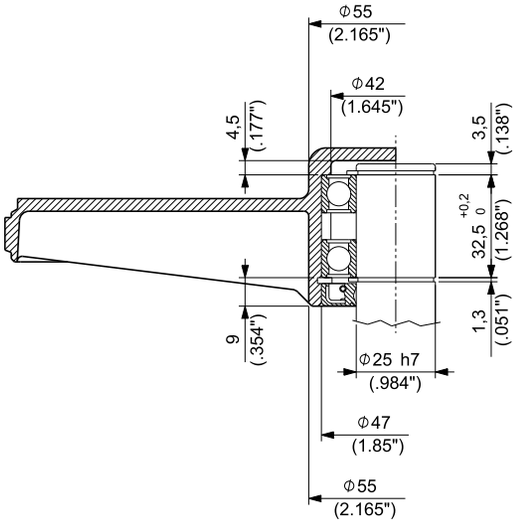


OPEN VERSION

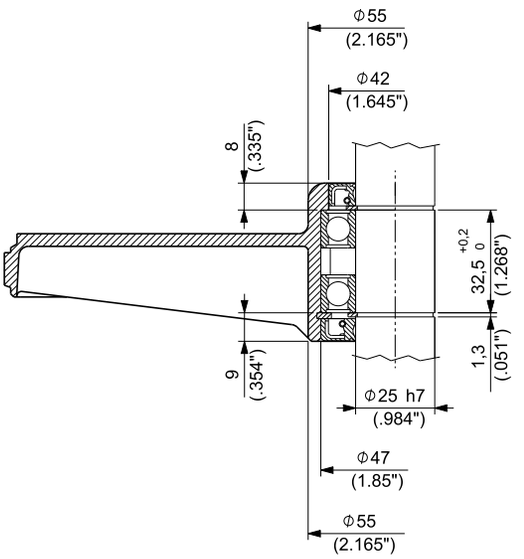

COMPONENTS:

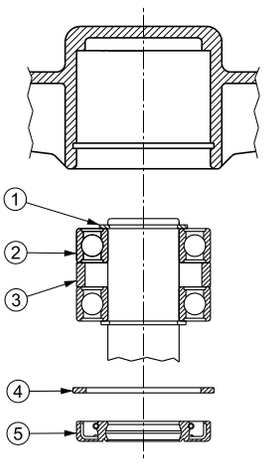

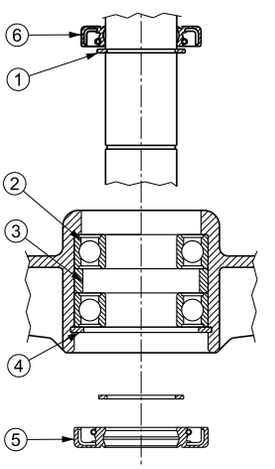

Turning discs are supplied with the following separated components:

1 - External retaining ring, Ø 25 UNI 7435-25;

2 - Single race radial bearing with two sliding seals, 6005-2RS1 (25x47x12);

3 - Bearing spacer;


4 - Internal retaining ring, Ø 47 UNI 7437-47;


5 - Seal ring with dust cover, DPSM 25477 DIN 3760 (25x47x7);

6 - Seal ring with dust cover, DPSM 25477 DIN 3760 (25x47x7), only for open version (CMT091700C00).

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PITCH 50 mm (1.969")
THICKNESS 5,0 mm (0.197")

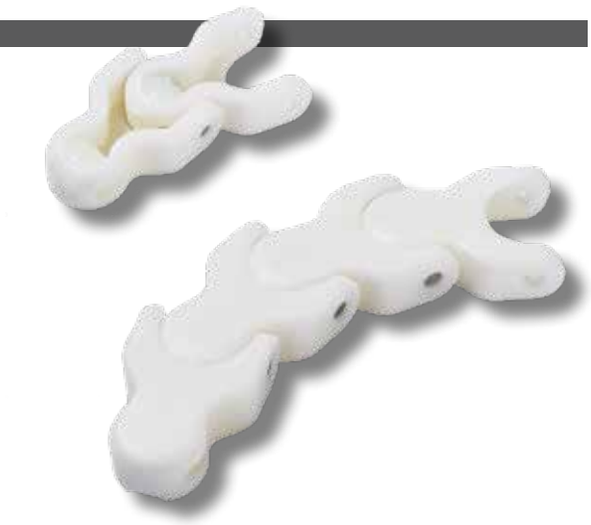

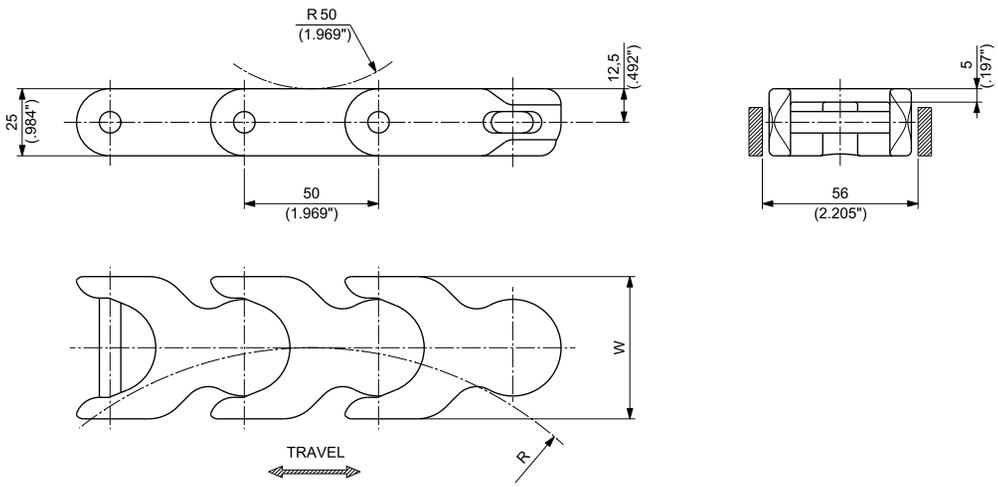

Materials see page 14
Sprockets see pages 156÷157
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
WHITE ACETAL RESIN WA	AUSTENITIC STAINLESS STEEL	1702A	1702A/000	53	2.09	140	5.51	3300	742	1,44	0.97


Standard packaging:
Rolls of 3,000 m (9.842 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SIDEFLEXING BIPLANAR CHAINS - **1701T SERIES**

TAB
PITCH 50 mm (1.969")
THICKNESS 5,0 mm (0.197")

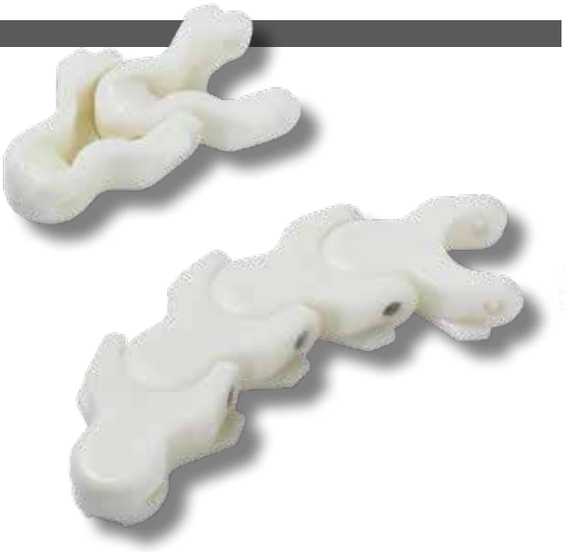

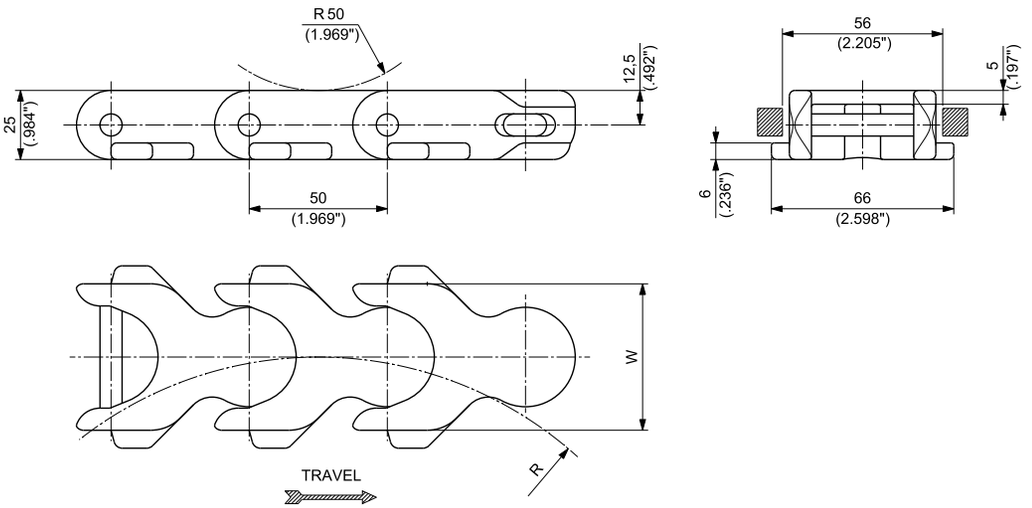

Materials see page 14
Sprockets see pages 156÷157
Corner tracks see page 344
Applications see page 22


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N		kg/m	lbs/ft
WHITE ACETAL RESIN WA	AUSTENITIC STAINLESS STEEL	1701TA	1701TA/000	53	2.09	140	5.51	3300	647	1,48	0.99
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	AUSTENITIC STAINLESS STEEL	UP 1701TA	UP1701TA/000	53	2.09	140	5.51	3000	647	1,42	0.95
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® D2K	AUSTENITIC STAINLESS STEEL	D2K 1701TA	D2K1701TA/000	53	2.09	140	5.51	3000	647	1,40	0.94

Standard packaging:
Rolls of 3,000 m (9.842 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

1702 AND 1701T SERIES WITH PUSHERS

REGINA can supply, on request, loose flights with holes plus pins and pushers which the customer can assemble on the standard biplanar chains type 1702 and 1701T.

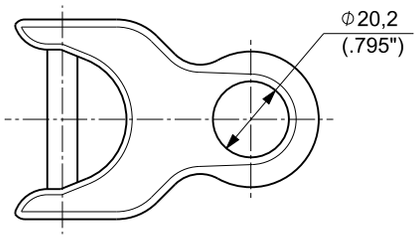


PART NUMBER: **136/1702**

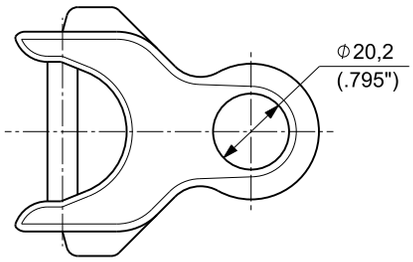

PART NUMBER: **136/1701T**


Two types of pushers are available:

TYPE "S" PUSHERS
With possibility of product accumulation.
This type of pusher has a rounded shape which allows some products accumulation.

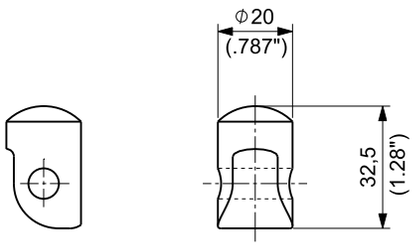


PART NUMBER: **232/1700**

TYPE "L" PUSHERS
With no possibility of product accumulation.
This type of pusher has an height that prevents any products accumulation.

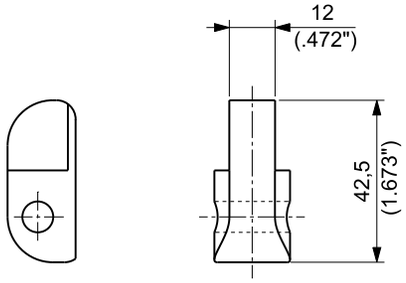

PART NUMBER: **233/1700**

Example of 1702 chain with pushers:

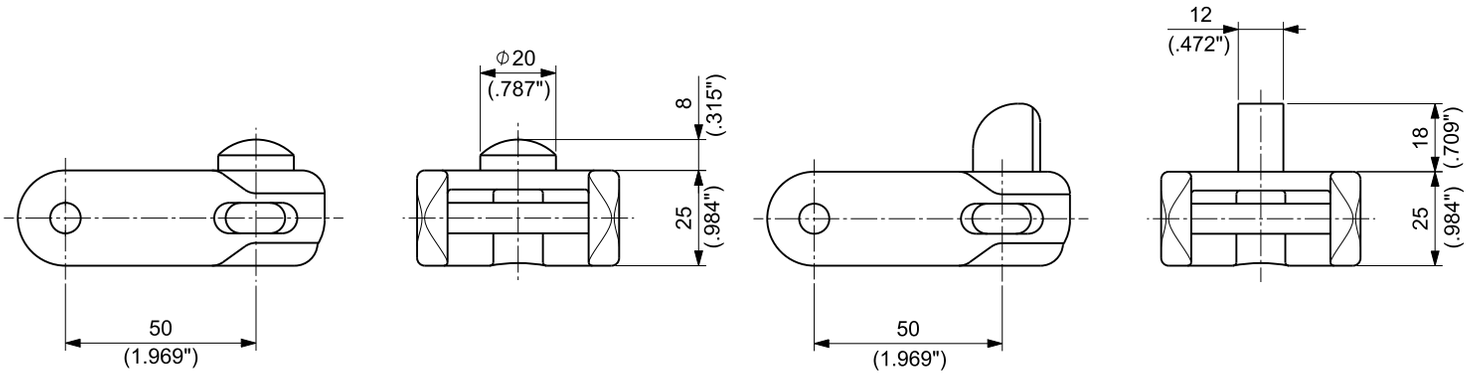


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop®

Sprockets for Chains

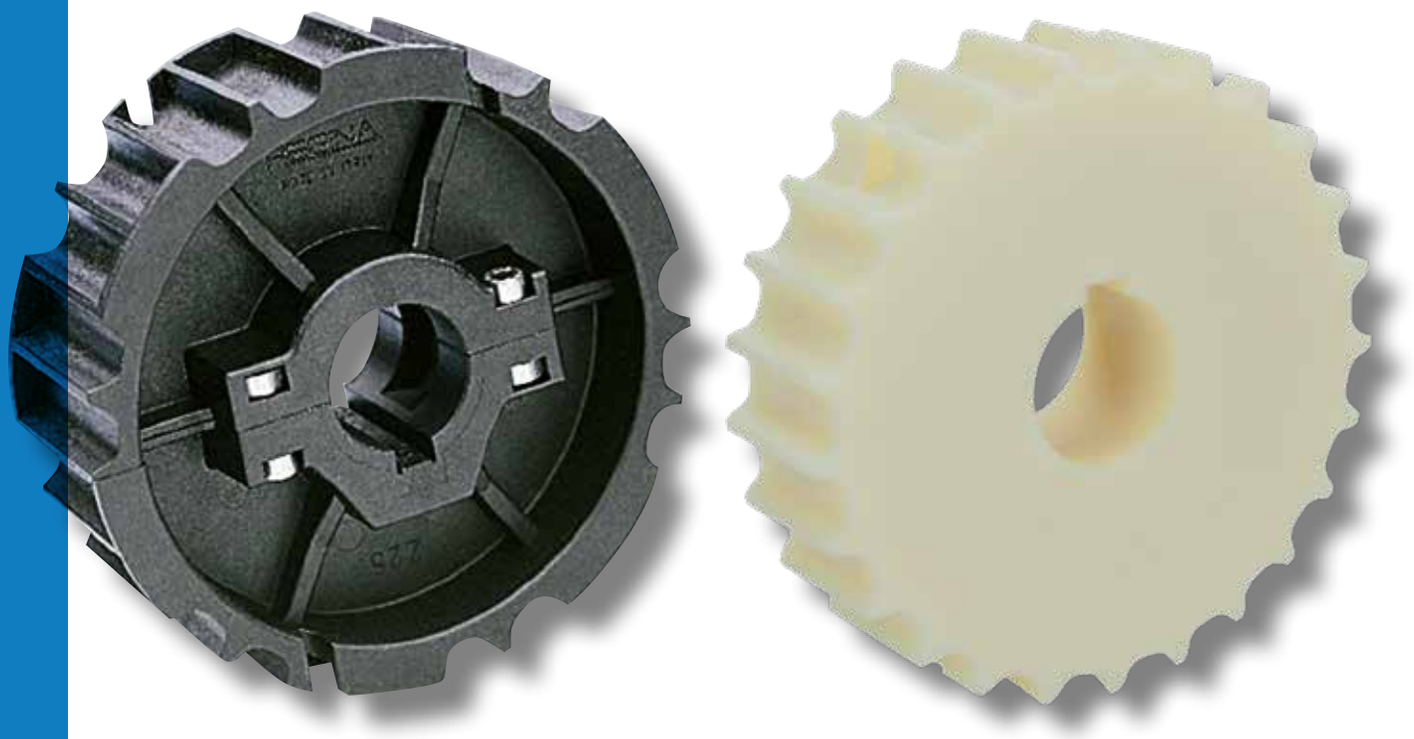

SPROCKETS SERIES INDEX		
815 series	PAGES	120÷123
250 series	PAGES	124÷127
2815 series	PAGES	128÷131
9157 series	PAGES	132÷133
803 series	PAGE	134
881 series	PAGES	135÷140
820 series	PAGES	141÷144
821 series	PAGES	145÷146
880 series	PAGES	147÷149
882 series	PAGES	150÷152
A40 series	PAGE	153
A60 series	PAGE	154
A80 series	PAGE	155
1700 series	PAGES	156÷157

CHAIN SERIES INDEX	SPROCKETS	
915, PHD 915, PHDG 915, 981M, PHD 981M, PHDG 981M series	PAGE	120
2815, PHDG 2815 series	PAGE	128
PHD 9157, PHDG 9157, PHD 9857M, PHDG 9857M series	PAGE	132
803 series	PAGE	134
881, 881T, 981, 981T, 982T, PHDG 981T series	PAGE	135
820, 831, HFX 820 series	PAGE	141
821, HFX 821, LBP 821 series	PAGE	145
828, 880, 879, 880T, 879T, 880M RG, 878T, 880TA, HFX 880T, EW 878T, GW 878T, GD 878T	PAGE	147
8257, 882, 882T, 882M, HFX 8257, HFX 882T, HFX 882M, LBP 8257, LBP 882T, LBP 882M series	PAGE	150
843, 845, RR 845, HF RR 845, 1843T, EW 1843T series	PAGE	153
1864, 1874T, 863, 1863T, 1873T, HFX 1873T, GV 1874, EV 1874T, GW 1873T, EW 1873T, GD 1873T, GS 1873T, GC 1873T series	PAGE	154
1883, HFX 1883 series	PAGE	155
1700, 1702, 1701T series	PAGE	156

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **915 / PHD 915**
- **PHDG 915**
- **981M / PHD 981M**
- **PHDG 981M**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




19T & 21T SPROCKETS


(for 23T & 25T see next page)

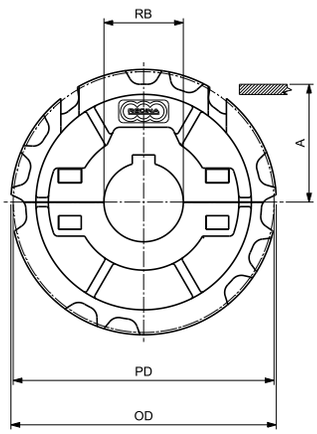

ROUND BORE - DRIVE

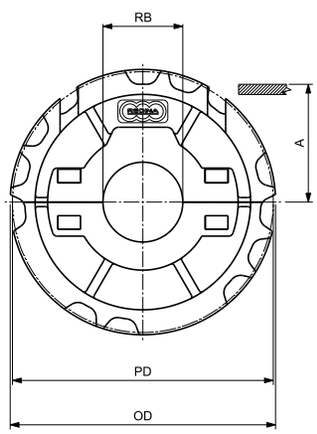

ROUND BORE - IDLER



MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
19	117,34	4.620	117,00	4.606	62,07	2.444	25		**CMT028151901**	**CMT038151901**	0,40	0.88
							30		**CMT028151902**	**CMT038151902**	0,39	0.86
							35		**CMT028151903**	**CMT038151903**	0,38	0.84
							40		**CMT028151904**	**CMT038151904**	0,37	0.82
							45		**CMT028151905**	**CMT038151905**	0,36	0.79
								1	CMT028151906	CMT038151906	0,40	0.88
								1 ¼	CMT028151908	CMT038151908	0,39	0.86
								1 ⅜	CMT028151911	CMT038151911	0,39	0.86
								1 7⁄16	CMT028151909	CMT038151909	0,38	0.84
								1 ½	CMT028151910	CMT038151910	0,37	0.82
21	129,30	5.091	130,00	5.118	68,05	2.679	25		**CMT028152101**	**CMT038152101**	0,52	1.15
							30		**CMT028152102**	**CMT038152102**	0,51	1.12
							35		**CMT028152103**	**CMT038152103**	0,50	1.10
							40		**CMT028152104**	**CMT038152104**	0,48	1.06
							45		**CMT028152105**	**CMT038152105**	0,47	1.04
								1	CMT028152106	CMT038152106	0,52	1.15
								1 ¼	CMT028152108	CMT038152108	0,51	1.12
								1 ⅜	CMT028152111	CMT038152111	0,50	1.10
								1 7⁄16	CMT028152109	CMT038152109	0,49	1.08
								1 ½	CMT028152110	CMT038152110	0,49	1.08

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **915 / PHD 915**
- **PHDG 915**
- **981M / PHD 981M**
- **PHDG 981M**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




23T & 25T SPROCKETS


(for 19T & 21T see previous page)

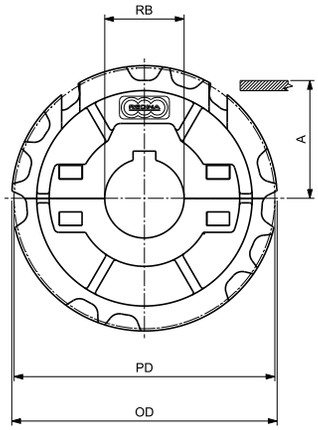

ROUND BORE - DRIVE

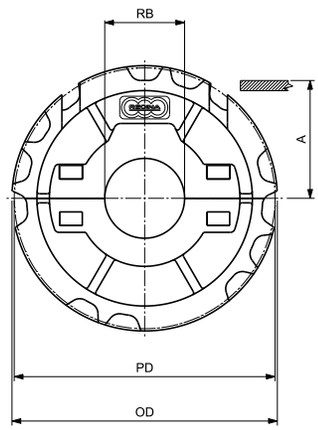

ROUND BORE - IDLER



MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
23	141,20	5.559	141,90	5.587	74,00	2.913	25		**CMT028152301**	**CMT038152301**	0,57	1.26
							30		**CMT028152302**	**CMT038152302**	0,56	1.23
							35		**CMT028152303**	**CMT038152303**	0,55	1.21
							40		**CMT028152304**	**CMT038152304**	0,53	1.17
							45		**CMT028152305**	**CMT038152305**	0,52	1.15
								1	CMT028152306	CMT038152306	0,57	1.26
								1 ¼	CMT028152308	CMT038152308	0,56	1.23
								1 ⅜	CMT028152311	CMT038152311	0,55	1.21
								1 7⁄16	CMT028152309	CMT038152309	0,54	1.19
								1 ½	CMT028152310	CMT038152310	0,54	1.19
25	153,19	6.031	154,20	6.071	80,00	3.150	25		**CMT028152501**	**CMT038152501**	0,62	1.37
							30		**CMT028152502**	**CMT038152502**	0,61	1.34
							35		**CMT028152503**	**CMT038152503**	0,60	1.32
							40		**CMT028152504**	**CMT038152504**	0,59	1.30
							45		**CMT028152505**	**CMT038152505**	0,57	1.26
								1	CMT028152506	CMT038152506	0,62	1.37
								1 ¼	CMT028152508	CMT038152508	0,61	1.34
								1 ⅜	CMT028152511	CMT038152511	0,60	1.32
								1 7⁄16	CMT028152509	CMT038152509	0,60	1.32
								1 ½	CMT028152510	CMT038152510	0,59	1.30

*Diameter is indicated.


** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **915 / PHD 915**
- **PHDG 915**
- **981M / PHD 981M**
- **PHDG 981M**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

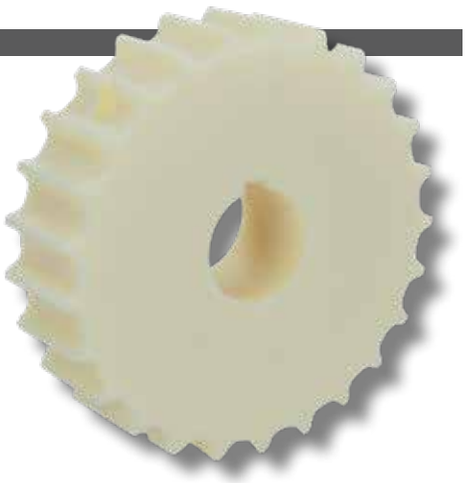

17T, 19T & 21T SPROCKETS

(for 23T, 25T & 27T see next page)

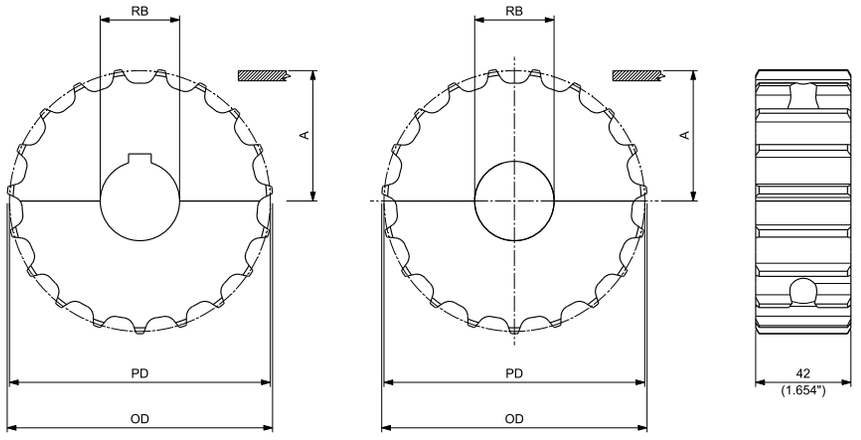

ROUND BORE - DRIVE

ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
17	105,47	4.152	104,40	4.110	56,34	2.218	25		**CMAS028151725**	**CMAS038151725**	0,36	0.80
							30		**CMAS028151730**	**CMAS038151730**	0,35	0.78
							35		**CMAS028151735**	**CMAS038151735**	0,34	0.75
							40		**CMAS028151740**	**CMAS038151740**	0,33	0.72
								1	CMAS0281517254	CMAS0381517254	0,36	0.80
								1 ¼	CMAS0281517317	CMAS0381517317	0,35	0.78
								1 ⅜	CMAS0281517349	CMAS0381517349	0,35	0.78
								1 7⁄16	CMAS0281517365	CMAS0381517365	0,34	0.75
								1 ½	CMAS0281517381	CMAS0381517381	0,33	0.73
19	117,34	4.620	117,00	4.606	62,27	2.452	25		**CMAS028151925**	**CMAS038151925**	0,45	1.00
							30		**CMAS028151930**	**CMAS038151930**	0,44	0.97
							35		**CMAS028151935**	**CMAS038151935**	0,43	0.95
							40		**CMAS028151940**	**CMAS038151940**	0,42	0.92
								1	CMAS0281519254	CMAS0381519254	0,45	1.00
								1 ¼	CMAS0281519317	CMAS0381519317	0,45	1.00
								1 ⅜	CMAS0281519349	CMAS0381519349	0,44	0.97
								1 7⁄16	CMAS0281519365	CMAS0381519365	0,43	0.94
								1 ½	CMAS0281519381	CMAS0381519381	0,42	0.92
21	129,26	5.089	129,40	5.094	68,23	2.686	25		**CMAS028152125**	**CMAS038152125**	0,54	1.20
							30		**CMAS028152130**	**CMAS038152130**	0,57	1.26
							35		**CMAS028152135**	**CMAS038152135**	0,53	1.17
							40		**CMAS028152140**	**CMAS038152140**	0,52	1.14
								1	CMAS0281521254	CMAS0381521254	0,55	1.22
								1 ¼	CMAS0281521317	CMAS0381521317	0,55	1.22
								1 ⅜	CMAS0281521349	CMAS0381521349	0,54	1.20
								1 7⁄16	CMAS0281521365	CMAS0381521365	0,53	1.17
								1 ½	CMAS0281521381	CMAS0381521381	0,52	1.15

*Diameter is indicated.


** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **915 / PHD 915**
- **PHDG 915**
- **981M / PHD 981M**
- **PHDG 981M**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

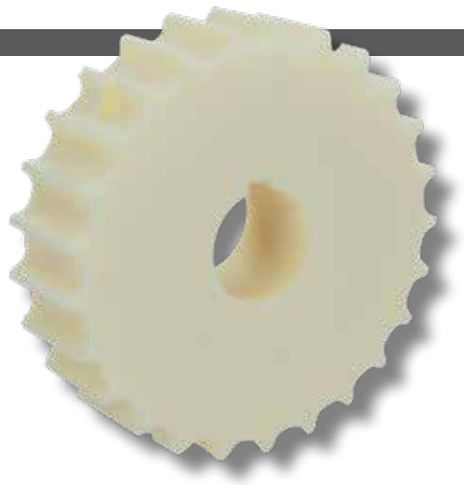


23T, 25T & 27T SPROCKETS

(for 17T, 19T & 21T see previous page)

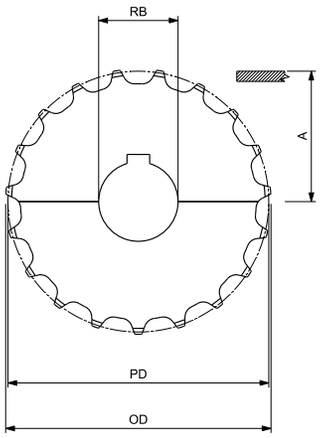

ROUND BORE - DRIVE

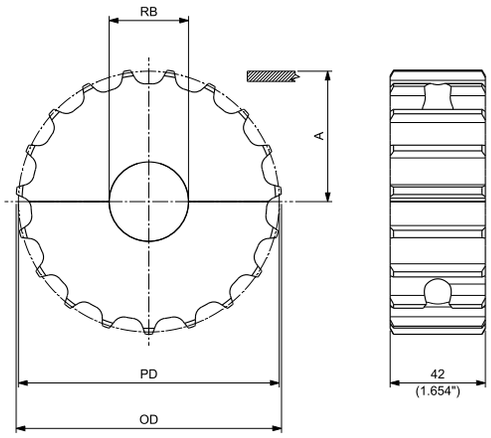

ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
23	141,22	5.560	141,90	5.587	74,21	2.922	25		**CMAS028152325**	**CMAS038152325**	0,66	1.46
							30		**CMAS028152330**	**CMAS038152330**	0,65	1.44
							35		**CMAS028152335**	**CMAS038152335**	0,64	1.41
							40		**CMAS028152340**	**CMAS038152340**	0,63	1.38
								1	CMAS0281523254	CMAS0381523254	0,66	1.46
								1 ¼	CMAS0281523317	CMAS0381523317	0,66	1.46
								1 ⅜	CMAS0281523349	CMAS0381523349	0,65	1.44
								1 7⁄16	CMAS0281523365	CMAS0381523365	0,64	1.41
								1 ½	CMAS0281523381	CMAS0381523381	0,63	1.39
25	153,20	6.031	154,20	6.071	80,20	3.157	25		**CMAS028152525**	**CMAS038152525**	0,82	1.80
							30		**CMAS028152530**	**CMAS038152530**	0,81	1.77
							35		**CMAS028152535**	**CMAS038152535**	0,79	1.75
							40		**CMAS028152540**	**CMAS038152540**	0,78	1.71
								1	CMAS0281525254	CMAS0381525254	0,82	1.80
								1 ¼	CMAS0281525317	CMAS0381525317	0,82	1.80
								1 ⅜	CMAS0281525349	CMAS0381525349	0,81	1.77
								1 7⁄16	CMAS0281525365	CMAS0381525365	0,79	1.75
								1 ½	CMAS0281525381	CMAS0381525381	0,78	1.73
27	165,21	6.504	166,40	6.551	86,20	3.394	25		**CMAS028152725**	**CMAS038152725**	1,01	2.22
							30		**CMAS028152730**	**CMAS038152730**	1,00	2.20
							35		**CMAS028152735**	**CMAS038152735**	0,98	2.17
							40		**CMAS028152740**	**CMAS038152740**	0,97	2.14
								1	CMAS0281527254	CMAS0381527254	1,00	2.20
								1 ¼	CMAS0281527317	CMAS0381527317	0,98	2.16
								1 ⅜	CMAS0281527349	CMAS0381527349	0,98	2.16
								1 7⁄16	CMAS0281527365	CMAS0381527365	0,97	2.14
								1 ½	CMAS0281527381	CMAS0381527381	0,97	2.14

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **915 / PHD 915**
- **PHDG 915**
- **881**
- **981 / 981M / PHD 981M**
- **PHDG 981M**
- **820**
- **HFX 820**
- **831**
- **828**
- **880 / 880M RG**
- **879**

MATERIALS
SPROCKETS: **PGF** REINFORCED POLYAMIDE



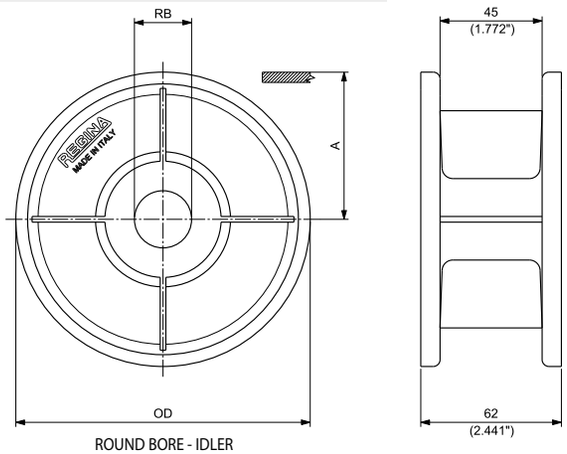

ROUND BORE - IDLER

MOULDED SOLID IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
21	129,80	5.110	64,90	2.555	25		**CMT032502101**	0,22	0.48
					30		**CMT032502102**	0,22	0.49
					35		**CMT032502103**	0,22	0.49
					40		**CMT032502104**	0,20	0.44
						1	CMT032502106	0,22	0.49
						1 ¼	CMT032502108	0,21	0.47
						1 ⅜	CMT032502111	0,21	0.47
						1 7⁄16	CMT032502109	0,20	0.44
						1 ½	CMT032502110	0,22	0.49
23	142,30	5.602	71,15	2.801	25		**CMT032502301**	0,25	0.54
					30		**CMT032502302**	0,25	0.55
					35		**CMT032502303**	0,24	0.53
					40		**CMT032502304**	0,24	0.54
						1	CMT032502306	0,24	0.54
						1 ¼	CMT032502308	0,24	0.53
						1 ⅜	CMT032502311	0,24	0.53
						1 7⁄16	CMT032502309	0,24	0.53
						1 ½	CMT032502310	0,25	0.55
25	154,70	6.091	77,35	3.045	25		**CMT032502501**	0,30	0.65
					30		**CMT032502502**	0,30	0.66
					35		**CMT032502503**	0,29	0.64
					40		**CMT032502504**	0,28	0.62
						1	CMT032502506	0,30	0.65
						1 ¼	CMT032502508	0,29	0.64
						1 ⅜	CMT032502511	0,29	0.64
						1 7⁄16	CMT032502509	0,29	0.64
						1 ½	CMT032502510	0,28	0.61

*Diameter is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **915 / PHD 915**
- **PHDG 915**
- **881**
- **981 / 981M / PHD 981M**
- **PHDG 981M**
- **820**
- **HFX 820**
- **831**
- **828**
- **880 / 880M RG**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL



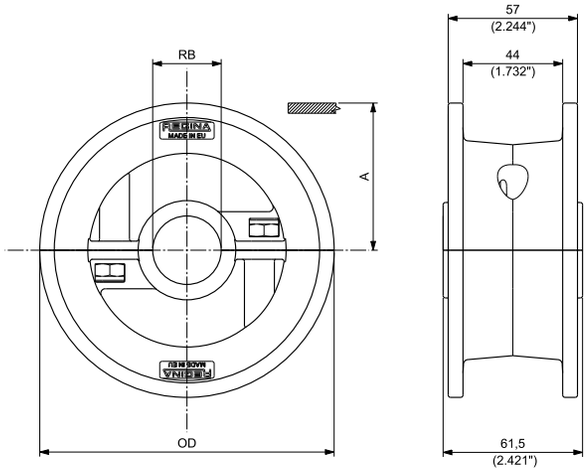

ROUND BORE - IDLER

MOULDED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
21	129,80	5.110	64,90	2.555	25		**CMTS048152125**	0,33	0.72
					30		**CMTS048152130**	0,33	0.73
					35		**CMTS048152135**	0,31	0.68
					40		**CMTS048152140**	0,34	0.76
					45		**CMTS048152145**	0,31	0.69
						1	CMTS0481521254	0,33	0.72
						1 ¼	CMTS0481521317	0,32	0.71
23	142,30	5.602	71,15	2.801	25		**CMTS048152325**	0,36	0.80
					30		**CMTS048152330**	0,37	0.81
					35		**CMTS048152335**	0,35	0.76
					40		**CMTS048152340**	0,38	0.84
					45		**CMTS048152345**	0,35	0.77
						1	CMTS0481523254	0,36	0.80
						1 ¼	CMTS0481523317	0,36	0.79
25	154,70	6.091	77,35	3.045	25		**CMTS048152525**	0,40	0.89
					30		**CMTS048152530**	0,41	0.90
					35		**CMTS048152535**	0,39	0.85
					40		**CMTS048152540**	0,42	0.92
					45		**CMTS048152545**	0,39	0.86
						1	CMTS0481525254	0,40	0.89
						1 ¼	CMTS0481525317	0,40	0.88

*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **915 / PHD 915**
- **PHDG 915**
- **881**
- **981 / 981M / PHD 981M**
- **PHDG 981M**
- **820**
- **HFX 820**
- **831**
- **828**
- **880 / 880M RG**
- **879**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



17T & 19T IDLER WHEELS

(for 21T, 23T & 25T see next page)

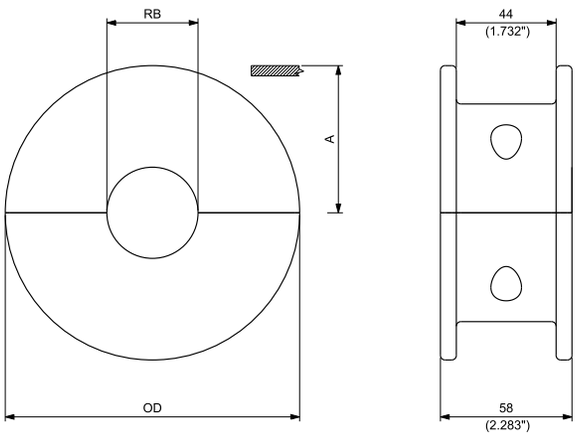

ROUND BORE - IDLER

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
17	106,50	4.193	53,25	2.096	25		**CMAS048151725**	0,34	0.76
					30		**CMAS048151730**	0,33	0.73
					35		**CMAS048151735**	0,31	0.69
					40		**CMAS048151740**	0,29	0.65
						1	CMAS0481517254	0,34	0.76
						1 ¼	CMAS0481517317	0,32	0.71
						1 ⅜	CMAS0481517349	0,32	0.71
						1 7⁄16	CMAS0481517365	0,31	0.69
						1 ½	CMAS0481517381	0,30	0.66
19	118,00	4.646	59,00	2.323	25		**CMAS048151925**	0,45	1.00
					30		**CMAS048151930**	0,44	0.97
					35		**CMAS048151935**	0,42	0.93
					40		**CMAS048151940**	0,40	0.89
						1	CMAS0481519254	0,45	1.00
						1 ¼	CMAS0481519317	0,42	0.92
						1 ⅜	CMAS0481519349	0,42	0.92
						1 7⁄16	CMAS0481519365	0,40	0.89
						1 ½	CMAS0481519381	0,38	0.84

*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **915 / PHD 915**
- **PHDG 915**
- **881 / 981 / 981M / PHD 981M**
- **PHDG 981M**
- **820 / HFX 820**
- **831**
- **828**
- **880 / 880M RG**
- **879**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



21T, 23T & 25T IDLER WHEELS

(for 17T & 19T see previous page)

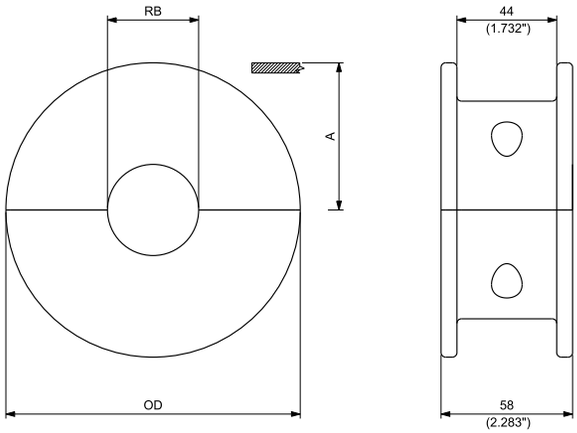

ROUND BORE - IDLER

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
21	129,80	5.110	64,90	2.555	25		**CMAS048152125**	0,58	1.27
					30		**CMAS048152130**	0,56	1.24
					35		**CMAS048152135**	0,54	1.20
					40		**CMAS048152140**	0,52	1.15
						1	**CMAS0481521254**	0,58	1.27
						1 ¼	**CMAS0481521317**	0,56	1.24
						1 7⁄16	**CMAS0481521365**	0,54	1.20
						1 ½	**CMAS0481521381**	0,53	1.17
23	142,30	5.602	71,15	2.801	25		**CMAS048152325**	0,72	1.58
					30		**CMAS048152330**	0,70	1.55
					35		**CMAS048152335**	0,69	1.51
					40		**CMAS048152340**	0,67	1.47
						1	**CMAS0481523254**	0,72	1.58
						1 ¼	**CMAS0481523317**	0,70	1.55
						1 7⁄16	**CMAS0481523365**	0,69	1.51
						1 ½	**CMAS0481523381**	0,67	1.49
25	154,70	6.091	77,35	3.045	25		**CMAS048152525**	0,87	1.92
					30		**CMAS048152530**	0,85	1.88
					35		**CMAS048152535**	0,84	1.85
					40		**CMAS048152540**	0,82	1.80
						1	**CMAS0481525254**	0,87	1.91
						1 ¼	**CMAS0481525317**	0,85	1.88
						1 7⁄16	**CMAS0481525365**	0,84	1.85
						1 ½	**CMAS0481525381**	0,83	1.82

*Diameter is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **2815 / PHD 2815**
- **PHDG 2815**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




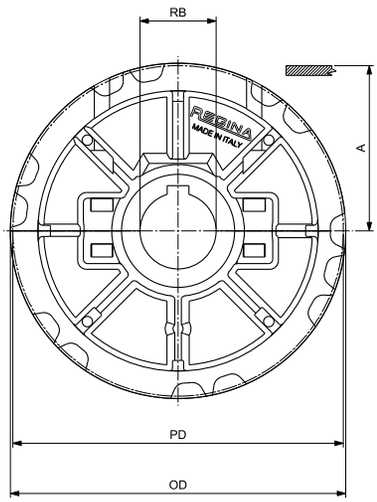

ROUND BORE - DRIVE

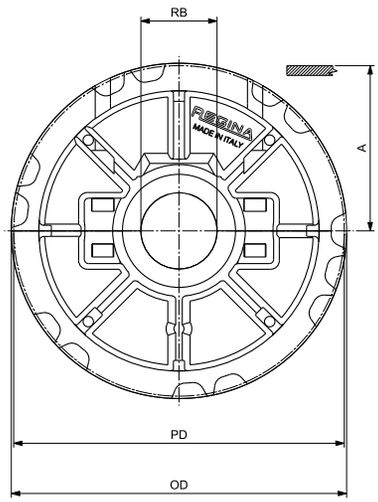

ROUND BORE - IDLER

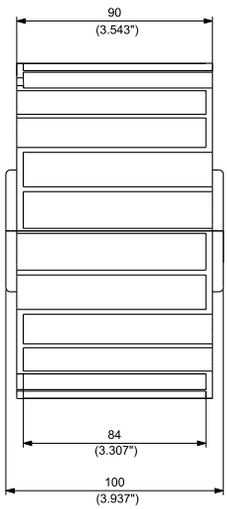

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
25	153,20	6.031	154,20	6.071	80,00	3.150	30		**CMT022802502**	**CMT032802502**	1,05	2.30
							35		**CMT022802503**	**CMT032802503**	1,03	2.27
							40		**CMT022802504**	**CMT032802504**	1,01	2.22
							45		**CMT022802505**	**CMT032802505**	0,98	2.16
								1 ¼	**CMT022802508**	**CMT032802508**	1,04	2.29
								1 ⅜	**CMT022802511**	**CMT032802511**	1,03	2.27
								1 7⁄16	**CMT022802509**	**CMT032802509**	1,02	2.25
								1 ½	**CMT022802510**	**CMT032802510**	1,01	2.24


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **2815 / PHD 2815**
- **PHDG 2815**
- **821**
- **HFX 821**
- **LBP 821**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

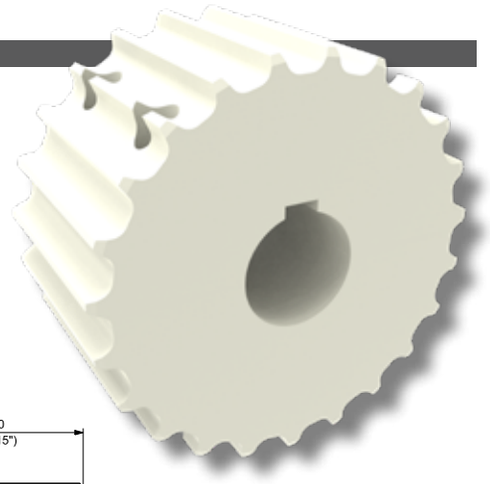


19T, 21T & 23T SPROCKETS


(for 25T , 27T & 29T see next page)

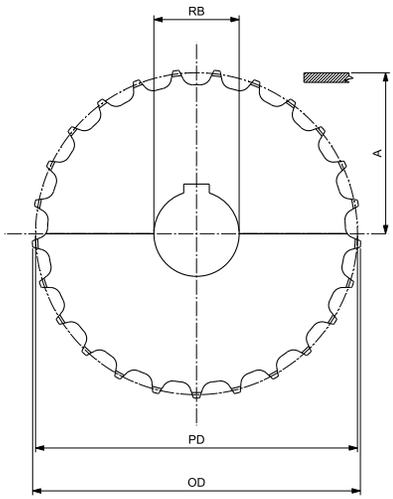

ROUND BORE - DRIVE

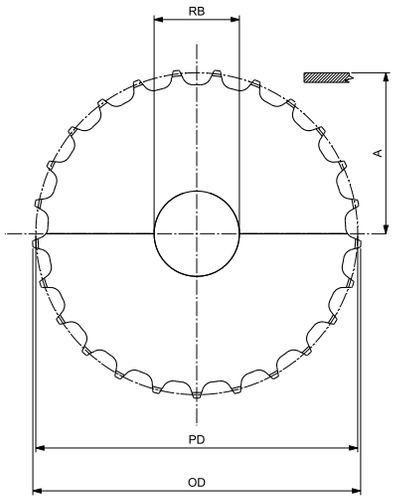

ROUND BORE - IDLER

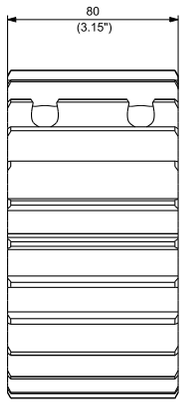


MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
19	117,34	4.620	117,00	4.606	62,27	2.452	25		**CMAS0228151925**	**CMAS0328151925**	0,87	1.92
							30		**CMAS0228151930**	**CMAS0328151930**	0,85	1.88
							35		**CMAS0228151935**	**CMAS0328151935**	0,83	1.83
							40		**CMAS0228151940**	**CMAS0328151940**	0,80	1.77
								1	CMAS02281519254	CMAS03281519254	0,87	1.92
								1 ¼	CMAS02281519317	CMAS03281519317	0,87	1.92
								1 ⅜	CMAS02281519349	CMAS03281519349	0,85	1.88
								1 7⁄16	CMAS02281519365	CMAS03281519365	0,82	1.81
								1 ½	CMAS02281519381	CMAS03281519381	0,74	1.64
21	129,26	5.089	129,40	5.094	68,23	2.686	25		**CMAS0228152125**	**CMAS0328152125**	1,07	2.36
							30		**CMAS0228152130**	**CMAS0328152130**	1,04	2.29
							35		**CMAS0228152135**	**CMAS0328152135**	1,01	2.23
							40		**CMAS0228152140**	**CMAS0328152140**	0,99	2.17
								1	CMAS02281521254	CMAS03281521254	1,06	2.33
								1 ¼	CMAS02281521317	CMAS03281521317	1,06	2.33
								1 ⅜	CMAS02281521349	CMAS03281521349	1,04	2.29
								1 7⁄16	CMAS02281521365	CMAS03281521365	0,99	2.17
								1 ½	CMAS02281521381	CMAS03281521381	1,00	2.20
23	141,22	5.560	141,90	5.587	74,21	2.922	25		**CMAS0228152325**	**CMAS0328152325**	1,27	2.81
							30		**CMAS0228152330**	**CMAS0328152330**	1,25	2.76
							35		**CMAS0228152335**	**CMAS0328152335**	1,23	2.71
							40		**CMAS0228152340**	**CMAS0328152340**	1,17	2.58
								1	CMAS02281523254	CMAS03281523254	1,27	2.80
								1 ¼	CMAS02281523317	CMAS03281523317	1,27	2.80
								1 ⅜	CMAS02281523349	CMAS03281523349	1,25	2.76
								1 7⁄16	CMAS02281523365	CMAS03281523365	1,23	2.71
								1 ½	CMAS02281523381	CMAS03281523381	1,21	2.68

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

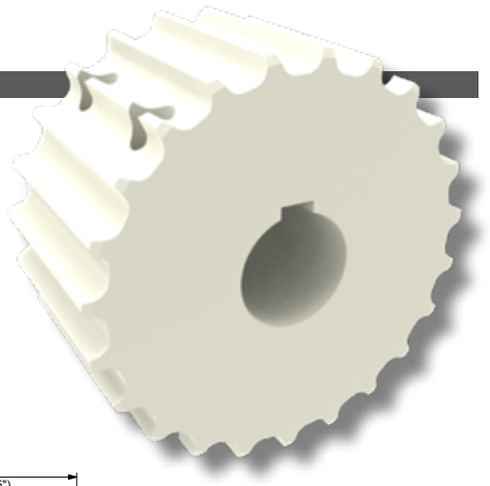


SUITABLE FOR CHAINS:

- **2815 / PHD 2815**
- **PHDG 2815**
- **821**
- **HFX 821**
- **LBP 821**


MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

25T, 27T & 29T SPROCKETS


(for 19T, 21T & 23T see previous page)

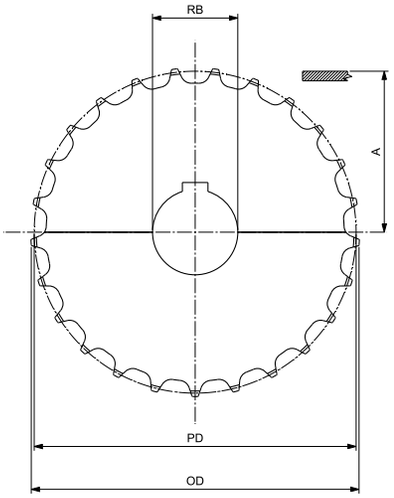

ROUND BORE - DRIVE

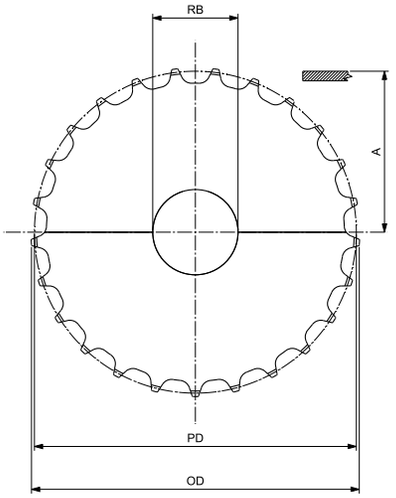

ROUND BORE - IDLER

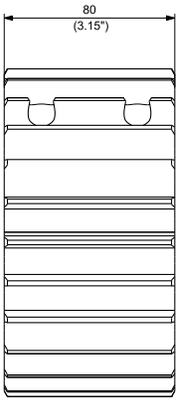

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
25	153,20	6.031	154,20	6.071	80,20	3.157	25		**CMAS0228152525**	**CMAS0328152525**	1,56	3.45
							30		**CMAS0228152530**	**CMAS0328152530**	1,54	3.41
							35		**CMAS0228152535**	**CMAS0328152535**	1,52	3.36
							40		**CMAS0228152540**	**CMAS0328152540**	1,49	3.29
								1	CMAS02281525254	CMAS03281525254	1,56	3.45
								1 ¼	CMAS02281525317	CMAS03281525317	1,54	3.41
								1 ⅜	CMAS02281525349	CMAS03281525349	1,54	3.41
								1 7⁄16	CMAS02281525365	CMAS03281525365	1,52	3.36
								1 ½	CMAS02281525381	CMAS03281525381	1,50	3.32
27	165,21	6.504	166,40	6.551	86,21	3.394	25		**CMAS0228152725**	**CMAS0328152725**	1,82	4.00
							30		**CMAS0228152730**	**CMAS0328152730**	1,80	3.96
							35		**CMAS0228152735**	**CMAS0328152735**	1,77	3.91
							40		**CMAS0228152740**	**CMAS0328152740**	1,75	3.85
								1	CMAS02281527254	CMAS03281527254	1,81	4.00
								1 ¼	CMAS02281527317	CMAS03281527317	1,81	4.00
								1 ⅜	CMAS02281527349	CMAS03281527349	1,80	3.96
								1 7⁄16	CMAS02281575365	CMAS03281575365	1,77	3.91
								1 ½	CMAS02281527381	CMAS03281527381	1,76	3.48
29	177,23	6.978	178,7	7.035	92,02	3.623	25		**CMAS0228152925**	**CMAS0328152925**	2,21	4.87
							30		**CMAS0228152930**	**CMAS0328152930**	2,19	4.83
							35		**CMAS0228152935**	**CMAS0328152935**	2,17	4.78
							40		**CMAS0228152940**	**CMAS0328152940**	2,14	4.72
								1	CMAS02281529254	CMAS03281529254	2,20	4.85
								1 ¼	CMAS02281529317	CMAS03281529317	2,19	4.83
								1 ⅜	CMAS02281529349	CMAS03281529349	2,17	4.78
								1 7⁄16	CMAS02281529365	CMAS03281529365	2,14	4.72
								1 ½	CMAS02281529381	CMAS03281529381	2,12	4.67

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **2815 / PHD 2815**
- **PHDG 2815**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



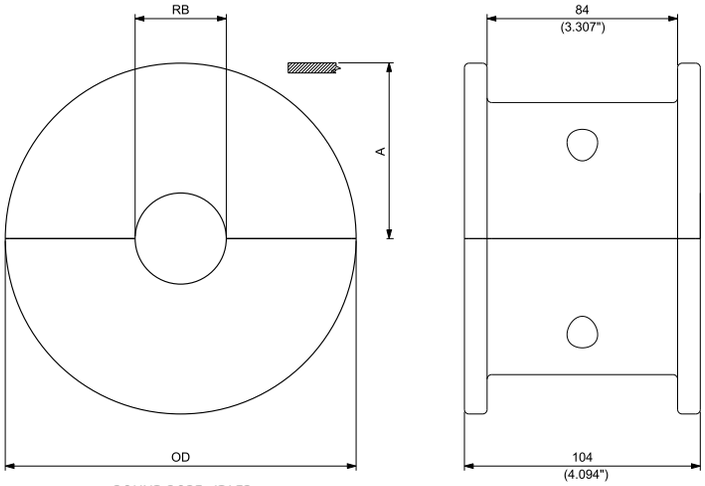

ROUND BORE - IDLER

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD mm	inch	WEAR STRIP POSITIONING A mm	inch	BORE SIZE* mm	inch	PART NUMBER ROUND BORE RB IDLER	WEIGHT Kg	lbs
19	118,00	4.646	59,00	2.323	25		**CMAS0428151925**	0,76	1.67
					30		**CMAS0428151930**	0,73	1.61
					35		**CMAS0428151935**	0,70	1.55
					40		**CMAS0428151940**	0,67	1.47
						1	CMAS04281519254	0,76	1.67
						1 ¼	CMAS04281519317	0,73	1.61
						1 ⅜	CMAS04281519349	0,70	1.55
						1 ½	CMAS04281519381	0,63	1.39
21	129,80	5.110	64,90	2.555	25		**CMAS0428152125**	0,97	2.14
					30		**CMAS0428152130**	0,94	2.08
					35		**CMAS0428152135**	0,91	2.02
					40		**CMAS0428152140**	0,88	1.94
						1	CMAS04281521254	0,97	2.14
						1 ¼	CMAS04281521317	0,94	2.08
						1 ⅜	CMAS04281521349	0,91	2.02
						1 ½	CMAS04281521381	0,89	1.97
23	142,30	5.602	71,15	2.801	25		**CMAS0428152325**	1,22	2.69
					30		**CMAS0428152330**	1,20	2.64
					35		**CMAS0428152335**	1,16	2.57
					40		**CMAS0428152340**	1,13	2.49
						1	CMAS04281523254	1,22	2.69
						1 ¼	CMAS04281523317	1,20	2.64
						1 ⅜	CMAS04281523349	1,16	2.57
						1 ½	CMAS04281523381	1,14	2.52
25	154,70	6.091	77,35	3.045	25		**CMAS0428152525**	1,49	3.29
					30		**CMAS0428152530**	1,46	3.23
					35		**CMAS0428152535**	1,43	3.16
					40		**CMAS0428152540**	1,40	3.08
						1	CMAS04281525254	1,49	3.28
						1 ¼	CMAS04281525317	1,46	3.23
						1 ⅜	CMAS04281525349	1,43	3.16
						1 ½	CMAS04281525381	1,41	3.12


*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **PHD 9157**
- **PHDG 9157**
- **PHD 9857M**
- **PHDG 9857M**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

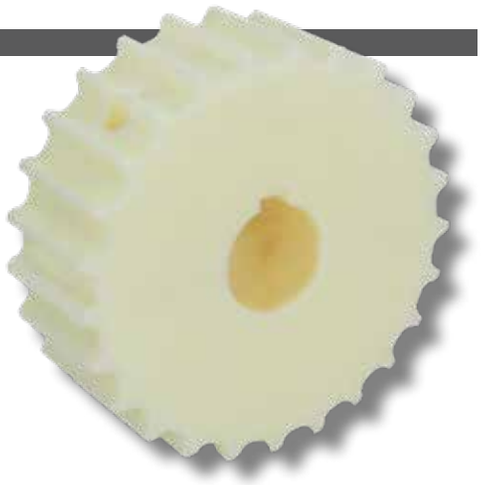

19T, 21T & 23T SPROCKETS

(for 25T & 27T see next page)

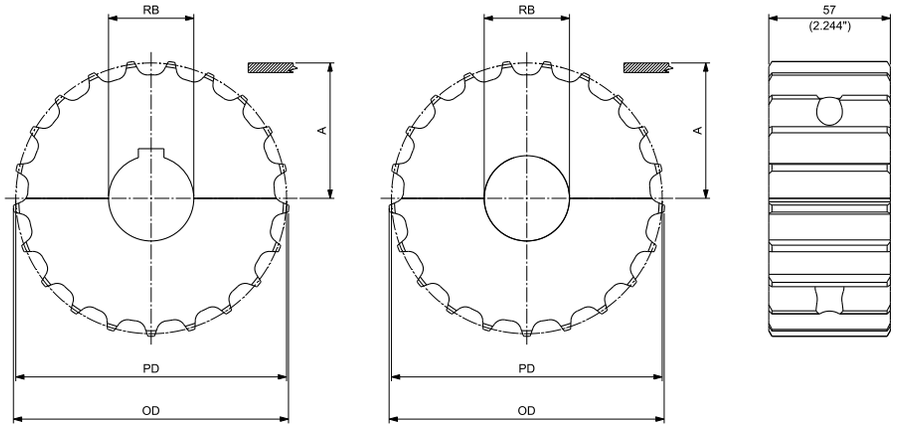

ROUND BORE - DRIVE

ROUND BORE - IDLER



MACHINED SPLIT IDLER WHEELS

SEE PAGE 139

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
19	117,34	4.620	117,00	4.606	62,07	2.444	25		**CMAS0291571925**	**CMAS0391571925**	0,68	1.50
							30		**CMAS0291571930**	**CMAS0391571930**	0,66	1.46
							35		**CMAS0291571935**	**CMAS0391571935**	0,64	1.41
							40		**CMAS0291571940**	**CMAS0391571940**	0,63	1.39
								1	CMAS02915719254	CMAS03915719254	0,68	1.50
								1 ¼	CMAS02915719317	CMAS03915719317	0,67	1.48
								1 ⅜	CMAS02915719349	CMAS03915719349	0,66	1.46
								1 7⁄16	CMAS02915719365	CMAS03915719365	0,64	1.41
								1 ½	CMAS02915719381	CMAS03915719381	0,62	1.37
21	129,26	5.089	129,40	5.094	68,03	2.678	25		**CMAS0291572125**	**CMAS0391572125**	0,74	1.64
							30		**CMAS0291572130**	**CMAS0391572130**	0,73	1.60
							35		**CMAS0291572135**	**CMAS0391572135**	0,71	1.57
							40		**CMAS0291572140**	**CMAS0391572140**	0,69	1.53
								1	CMAS02915721254	CMAS03915721254	0,74	1.63
								1 ¼	CMAS02915721317	CMAS03915721381	0,73	1.60
								1 ⅜	CMAS02915721349	CMAS03915721349	0,73	1.60
								1 7⁄16	CMAS02915721365	CMAS03915721365	0,71	1.57
								1 ½	CMAS02915721381	CMAS03915721381	0,70	1.54
23	141,22	5.560	141,90	5.587	74,01	2.914	25		**CMAS0291572325**	**CMAS0391572325**	0,99	2.18
							30		**CMAS0291572330**	**CMAS0391572330**	0,98	2.16
							35		**CMAS0291572335**	**CMAS0391572335**	0,96	2.12
							40		**CMAS0291572340**	**CMAS0391572340**	0,94	2.07
								1	CMAS02915723254	CMAS03915723254	0,99	2.18
								1 ¼	CMAS02915723317	CMAS03915723317	0,99	2.18
								1 ⅜	CMAS02915723349	CMAS03915723349	0,98	2.16
								1 7⁄16	CMAS02915723365	CMAS03915723365	0,96	2.12
								1 ½	CMAS02915723381	CMAS03915723381	0,94	2.07

*Diameter is indicated.


** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **PHD 9157**
- **PHDG 9157**
- **PHD 9857M**
- **PHDG 9857M**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

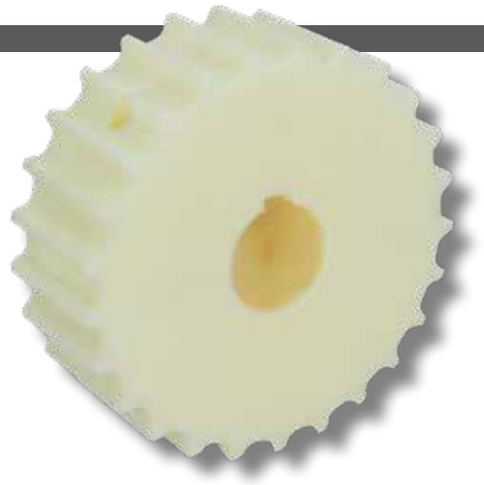

25T & 27T SPROCKETS

(for 19T, 21T & 23T see previous page)

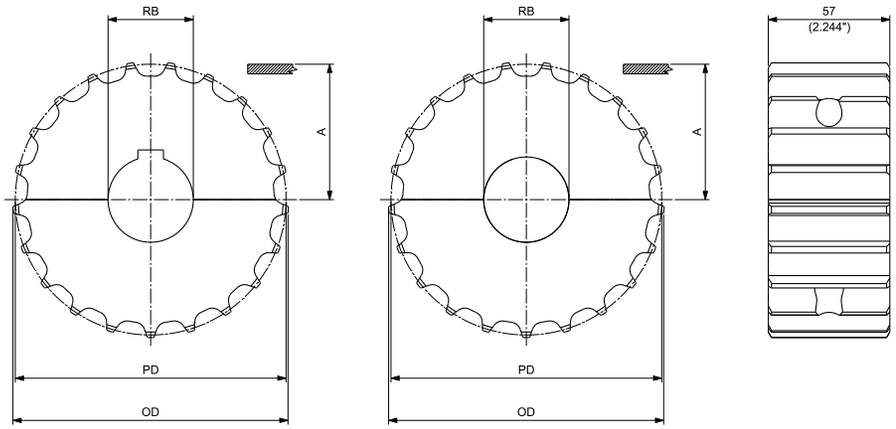

ROUND BORE - DRIVE

ROUND BORE - IDLER



MACHINED SPLIT IDLER WHEELS
SEE PAGE 139

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
25	153,20	6.031	154,20	6.071	80,00	3.150	25		**CMAS0291572525**	**CMAS0391572525**	1,09	2.40
							30		**CMAS0291572530**	**CMAS0391572530**	1,07	2.37
							35		**CMAS0291572535**	**CMAS0391572535**	1,06	2.33
							40		**CMAS0291572540**	**CMAS0391572540**	1,04	2.29
								1	CMAS02915725254	CMAS03915725254	1,09	2.40
								1 ¼	CMAS02915725317	CMAS03915725317	1,09	2.40
								1 ⅜	CMAS02915725349	CMAS03915725349	1,07	2.37
								1 7/16	CMAS02915725365	CMAS03915725365	1,06	2.33
								1 ½	CMAS02915725381	CMAS03915725381	1,05	2.31
27	165,21	6.504	166,40	6,551	86,01	3.386	25		**CMAS0291572725**	**CMAS0391572725**	1,27	2.80
							30		**CMAS0291572730**	**CMAS0391572730**	1,26	2.77
							35		**CMAS0291572735**	**CMAS0391572735**	1,24	2.74
							40		**CMAS0291572740**	**CMAS0391572740**	1,22	2.69
								1	CMAS02915727254	CMAS03915727254	1,27	2.80
								1 ¼	CMAS02915727317	CMAS03915727317	1,27	2.80
								1 ⅜	CMAS02915727349	CMAS03915727349	1,26	2.77
								1 7/16	CMAS02915727365	CMAS03915727365	1,24	2.74
								1 ½	CMAS02915727381	CMAS03915727381	1,23	2.71


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **803**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

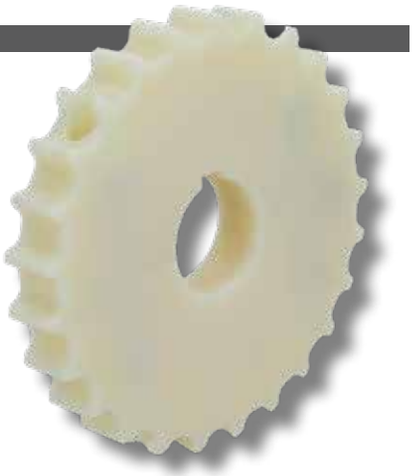


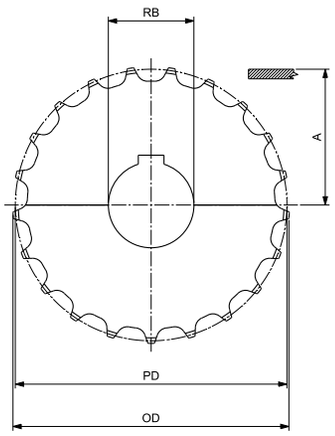

ROUND BORE - DRIVE

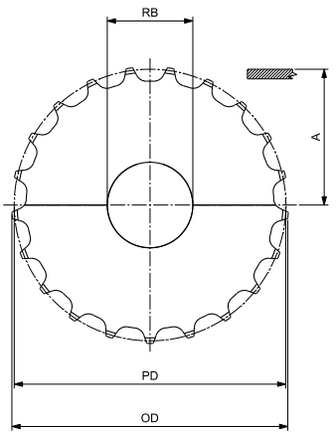

ROUND BORE - IDLER





MOULDED SPLIT SPROCKETS
SEE PAGE 135

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
17	105,47	4.152	104,40	4.110	55,94	2.202	25		**CMAS028031725**	**CMAS038031725**	0,21	0.47
							30		**CMAS028031730**	**CMAS038031730**	0,20	0.45
							35		**CMAS028031735**	**CMAS038031735**	0,20	0.43
							40		**CMAS028031740**	**CMAS038031740**	0,20	0.45
								1	CMAS0280317254	CMAS0380317254	0,21	0.46
								1¼	CMAS0280317317	CMAS0380317317	0,20	0.44
								1 ½	CMAS0280317381	CMAS0380317381	0,19	0.42
19	117,34	4.620	117,00	4.606	62,87	2.475	25		**CMAS028031925**	**CMAS038031925**	0,26	0.57
							30		**CMAS028031930**	**CMAS038031930**	0,25	0.56
							35		**CMAS028031935**	**CMAS038031935**	0,25	0.54
							40		**CMAS028031940**	**CMAS038031940**	0,24	0.52
								1	CMAS0280319254	CMAS0380319254	0,26	0.57
								1¼	CMAS0280319317	CMAS0380319317	0,24	0.54
								1 ½	CMAS0280319381	CMAS0380319381	0,22	0.49
21	129,26	5.089	129,40	5.094	67,83	2.670	25		**CMAS028032125**	**CMAS038032125**	0,31	0.68
							30		**CMAS028032130**	**CMAS038032130**	0,30	0.67
							35		**CMAS028032135**	**CMAS038032135**	0,30	0.65
							40		**CMAS028032140**	**CMAS038032140**	0,29	0.63
								1	CMAS0280321254	CMAS0380321254	0,31	0.68
								1¼	CMAS0280321317	CMAS0380321317	0,29	0.64
								1 ½	CMAS0280321381	CMAS0380321381	0,27	0.59
23	141,22	5.560	141,90	5.587	73,81	2.906	25		**CMAS028032325**	**CMAS038032325**	0,37	0.80
							30		**CMAS028032330**	**CMAS038032330**	0,36	0.79
							35		**CMAS028032335**	**CMAS038032335**	0,35	0.78
							40		**CMAS028032340**	**CMAS038032340**	0,35	0.78
								1	CMAS0280323254	CMAS0380323254	0,36	0.80
								1¼	CMAS0280323317	CMAS0380323317	0,35	0.77
								1 ½	CMAS0280323381	CMAS0380323381	0,33	0.72
25	153,19	6.031	154,20	6.071	79,80	3.142	25		**CMAS028032525**	**CMAS038032525**	0,45	1.00
							30		**CMAS028032530**	**CMAS038032530**	0,45	0.99
							35		**CMAS028032535**	**CMAS038032535**	0,44	0.97
							40		**CMAS028032540**	**CMAS038032540**	0,43	0.96
								1	CMAS0280325254	CMAS0380325254	0,45	1.00
								1¼	CMAS0280325317	CMAS0380325317	0,44	0.96
								1 ½	CMAS0280325381	CMAS0380325381	0,38	0.84

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **881 / 881T**
- **981 / 981T**
- **PHDG 981T**
- **982T**
- **803**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




19T & 21T SPROCKETS


(for 23T & 25T see next page)

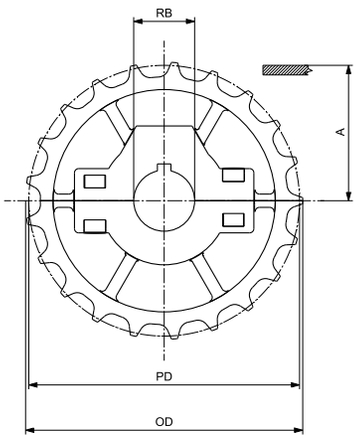

ROUND BORE - DRIVE

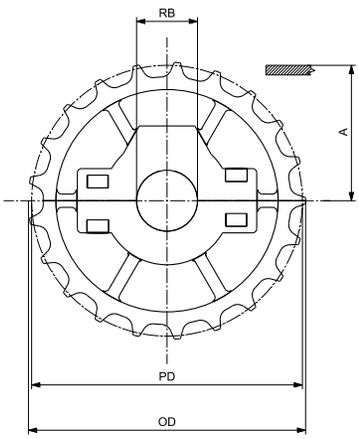

ROUND BORE - IDLER

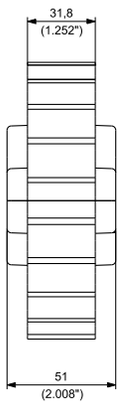



MOULDED SPLIT IDLER WHEELS FOR 881/981 CHAINS
See page 125



MOULDED SOLID IDLER WHEELS FOR 881/981 CHAINS
See page 124

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
19	117,34	4.620	117,00	4.606	62,07	2.444	25		**CMT028811901**	**CMT038811901**	0,33	0.73
							30		**CMT028811902**	**CMT038811902**	0,32	0.71
							35		**CMT028811903**	**CMT038811903**	0,31	0.68
							40		**CMT028811904**	**CMT038811904**	0,30	0.66
							45		**CMT028811905**	**CMT038811905**	0,29	0.64
								1	CMT028811906	CMT038811906	0,33	0.73
								1 ¼	CMT028811908	CMT038811908	0,32	0.71
								1 ⅜	CMT028811911	CMT038811911	0,32	0.71
								1 7/16	CMT028811909	CMT038811909	0,31	0.68
								1 ½	CMT028811910	CMT038811910	0,31	0.68
21	129,30	5.091	130,00	5.118	68,05	2.679	25		**CMT028812101**	**CMT038812101**	0,43	0.95
							30		**CMT028812102**	**CMT038812102**	0,42	0.93
							35		**CMT028812103**	**CMT038812103**	0,41	0.91
							40		**CMT028812104**	**CMT038812104**	0,40	0.88
							45		**CMT028812105**	**CMT038812105**	0,39	0.85
								1	CMT028812106	CMT038812106	0,43	0.95
								1 ¼	CMT028812108	CMT038812108	0,42	0.92
								1 ⅜	CMT028812111	CMT038812111	0,42	0.92
								1 7/16	CMT028812109	CMT038812109	0,41	0.90
								1 ½	CMT028812110	CMT038812110	0,40	0.89

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **881 / 881T**
- **981 / 981T**
- **PHDG 981T**
- **982T**
- **803**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




23T & 25T SPROCKETS


(for 19T & 21T see previous page)

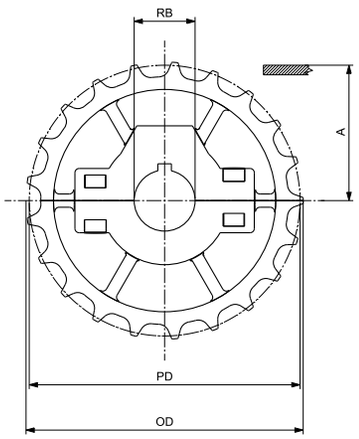

ROUND BORE - DRIVE

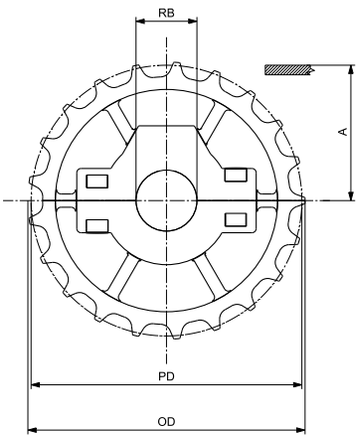

ROUND BORE - IDLER





MOULDED SPLIT IDLER WHEELS FOR 881/981 CHAINS
See page 125



MOULDED SOLID IDLER WHEELS FOR 881/981 CHAINS
See page 124

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
23	141,20	5.559	141,90	5.587	74,00	2.913	25		**CMT028812301**	**CMT038812301**	0,47	1.04
							30		**CMT028812302**	**CMT038812302**	0,46	1.02
							35		**CMT028812303**	**CMT038812303**	0,45	1.00
							40		**CMT028812304**	**CMT038812304**	0,44	0.97
							45		**CMT028812305**	**CMT038812305**	0,43	0.94
								1	CMT028812306	CMT038812306	0,47	1.04
								1 ¼	CMT028812308	CMT038812308	0,46	1.01
								1 ⅜	CMT028812311	CMT038812311	0,46	1.01
								1 7⁄16	CMT028812309	CMT038812309	0,45	0.99
								1 ½	CMT028812310	CMT038812310	0,44	0.98
25	153,20	6.031	154,20	6.071	80,00	3.150	25		**CMT028812501**	**CMT038812501**	0,51	1.13
							30		**CMT028812502**	**CMT038812502**	0,50	1.11
							35		**CMT028812503**	**CMT038812503**	0,49	1.09
							40		**CMT028812504**	**CMT038812504**	0,48	1.06
							45		**CMT028812505**	**CMT038812505**	0,47	1.03
								1	CMT028812506	CMT038812506	0,51	1.13
								1 ¼	CMT028812508	CMT038812508	0,50	1.10
								1 ⅜	CMT028812511	CMT038812511	0,50	1.10
								1 7⁄16	CMT028812509	CMT038812509	0,49	1.08
								1 ½	CMT028812510	CMT038812510	0,48	1.07


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **881 / 881T**
- **981 / 981T**
- **PHDG 981T**
- **982T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

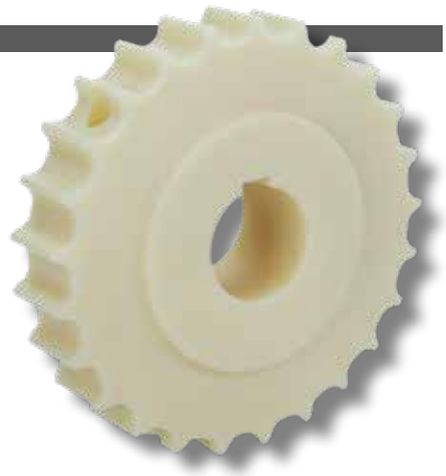

17T, 19T & 21T SPROCKETS

(for 23T, 25T & 27T see next page)

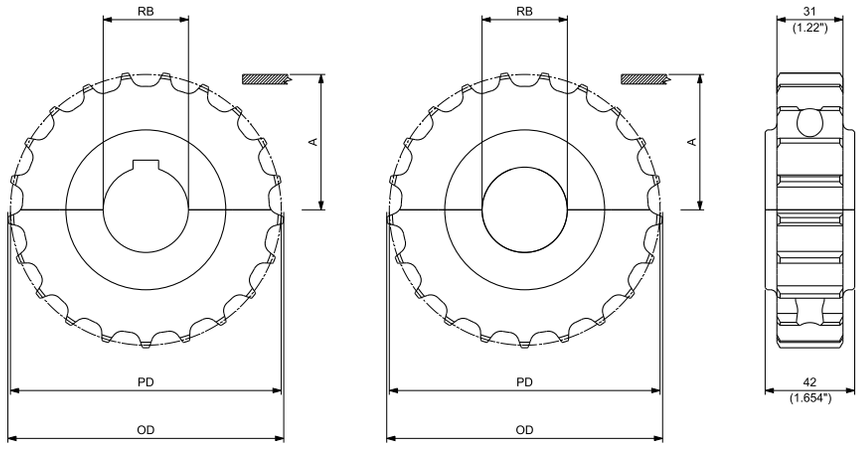

ROUND BORE - DRIVE

ROUND BORE - IDLER



MACHINED SPLIT IDLER WHEELS FOR 881/981 CHAINS

See page 126

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
17	105,47	4.152	104,40	4.110	56,14	2.210	25		**CMAS028811725**	**CMAS038811725**	0,31	0.68
							30		**CMAS028811730**	**CMAS038811730**	0,30	0.66
							35		**CMAS028811735**	**CMAS038811735**	0,29	0.63
							40		**CMAS028811740**	**CMAS038811740**	0,27	0.60
								1	CMAS0288117254	CMAS0388117254	0,31	0.68
								1¼	CMAS0288117317	CMAS0388117317	0,29	0.65
								1 ⅜	CMAS0288117349	CMAS0388117349	0,29	0.65
								1 7⁄16	CMAS0288117365	CMAS0388117365	0,28	0.61
								1 ½	CMAS0288117381	CMAS0388117381	0,28	0.61
19	117,34	4.620	117,00	4.606	62,07	2.444	25		**CMAS028811925**	**CMAS038811925**	0,39	0.86
							30		**CMAS028811930**	**CMAS038811930**	0,38	0.84
							35		**CMAS028811935**	**CMAS038811935**	0,37	0.81
							40		**CMAS028811940**	**CMAS038811940**	0,35	0.78
								1	CMAS0288119254	CMAS0388119254	0,39	0.86
								1 ¼	CMAS0288119317	CMAS0388119317	0,38	0.84
								1 ⅜	CMAS0288119349	CMAS0388119349	0,37	0.81
								1 7⁄16	CMAS0288119365	CMAS0388119365	0,36	0.80
								1 ½	CMAS0288119381	CMAS0388119381	0,32	0.71
21	129,26	5.089	129,40	5.094	68,03	2.678	25		**CMAS028812125**	**CMAS038812125**	0,47	1.03
							30		**CMAS028812130**	**CMAS038812130**	0,46	1.01
							35		**CMAS028812135**	**CMAS038812135**	0,45	0.98
							40		**CMAS028812140**	**CMAS038812140**	0,43	0.95
								1	CMAS0288121254	CMAS0388121254	0,47	1.03
								1 ¼	CMAS0288121317	CMAS0388121317	0,47	1.03
								1 ⅜	CMAS0288121349	CMAS0388121349	0,46	1.01
								1 7⁄16	CMAS0288121365	CMAS0388121365	0,45	0.98
								1 ½	CMAS0288121381	CMAS0388121381	0,44	0.96

*Diameter is indicated.


** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **881 / 881T**
- **981 / 981T**
- **PHDG 981T**
- **982T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

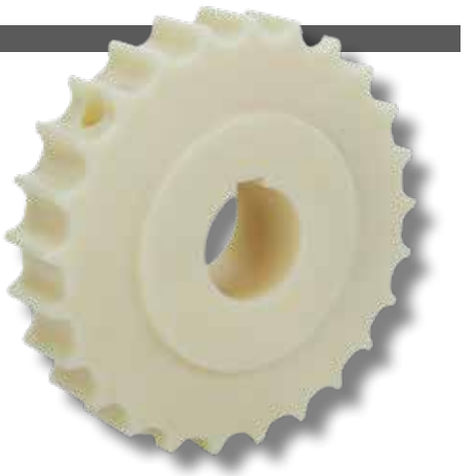


23T, 25T & 27T SPROCKETS


(for 17T, 19T & 21T see previous page)

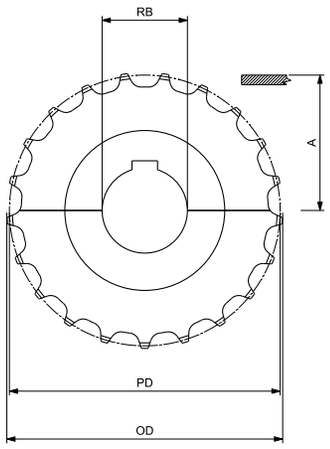

ROUND BORE - DRIVE

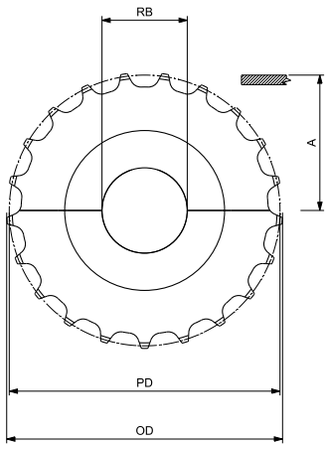

ROUND BORE - IDLER





MACHINED SPLIT IDLER WHEELS FOR 881/981 CHAINS

See page 126

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
23	141,22	5.560	141,90	5.587	74,01	2.914	25		**CMAS028812325**	**CMAS038812325**	0,56	1.23
							30		**CMAS028812330**	**CMAS038812330**	0,55	1.21
							35		**CMAS028812335**	**CMAS038812335**	0,54	1.18
							40		**CMAS028812340**	**CMAS038812340**	0,52	1.15
								1	CMAS0288123254	CMAS0388123254	0,56	1.23
								1 ¼	CMAS0288123317	CMAS0388123317	0,56	1.23
								1 ⅜	CMAS0288123349	CMAS0388123349	0,55	1.21
								1 7⁄16	CMAS0288123365	CMAS0388123365	0,54	1.18
								1 ½	CMAS0288123381	CMAS0388123381	0,53	1.16
25	153,20	6.031	154,20	6.071	80,00	3.150	25		**CMAS028812525**	**CMAS038812525**	0,69	1.52
							30		**CMAS028812530**	**CMAS038812530**	0,68	1.50
							35		**CMAS028812535**	**CMAS038812535**	0,67	1.47
							40		**CMAS028812540**	**CMAS038812540**	0,65	1.44
								1	CMAS0288125254	CMAS0388125254	0,69	1.52
								1 ¼	CMAS0288125317	CMAS0388125317	0,69	1.52
								1 ⅜	CMAS0288125349	CMAS0388125349	0,68	1.50
								1 7⁄16	CMAS0288125365	CMAS0388125365	0,67	1.47
								1 ½	CMAS0288125381	CMAS0388125381	0,66	1.46
27	165,21	6.504	166,40	6.551	86,01	3.386	25		**CMAS028812725**	**CMAS038812725**	0,83	1.84
							30		**CMAS028812730**	**CMAS038812730**	0,82	1.81
							35		**CMAS028812735**	**CMAS038812735**	0,81	1.79
							40		**CMAS028812740**	**CMAS038812740**	0,80	1.75
								1	CMAS0288127254	CMAS0388127254	0,83	1.83
								1 ¼	CMAS0288127317	CMAS0388127317	0,83	1.83
								1 ⅜	CMAS0288127349	CMAS0388127349	0,82	1.81
								1 7⁄16	CMAS0288127365	CMAS0388127365	0,81	1.79
								1 ½	CMAS0288127381	CMAS0388127381	0,80	1.76

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **PHD 9157**
- **PHDG 9157**
- **881T**
- **981T**
- **PHDG 981T**
- **PHD 9857M**
- **PHDG 9857M**
- **982T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



17T,19T & 21T IDLER WHEELS

(for 23T & 25T see next page)

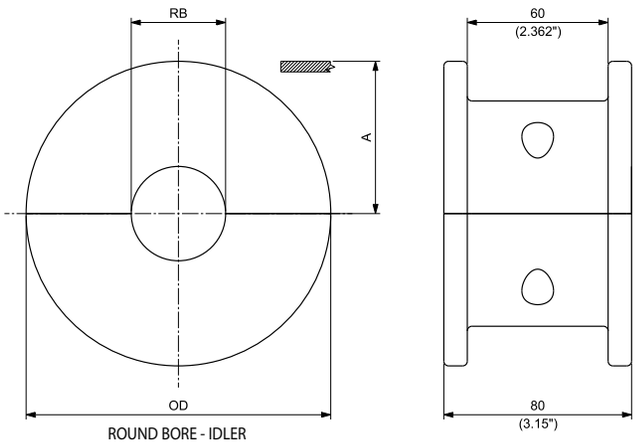

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD mm	inch	WEAR STRIP POSITIONING A mm	inch	BORE SIZE* mm	inch	PART NUMBER ROUND BORE RB IDLER	WEIGHT Kg	lbs
17	106,50	4.193	53,25	2.096	25		**CMAS04881T1725**	0,44	0.97
					25		**CMAS04881T1730**	0,42	0.93
					35		**CMAS04881T1735**	0,39	0.86
					40		**CMAS04881T1740**	0,37	0.82
						1	CMAS04881T17254	0,44	0.97
						1 ¼	CMAS04881T17317	0,42	0.93
						1 ⅜	CMAS04881T17349	0,42	0.93
						1 7/16	CMAS04881T17365	0,39	0.86
						1 ½	CMAS04881T17381	0,38	0.84
19	118,00	4.646	59,00	2.323	25		**CMAS04881T1925**	0,58	1.28
					30		**CMAS04881T1930**	0,56	1.23
					35		**CMAS04881T1935**	0,54	1.19
					40		**CMAS04881T1940**	0,51	1.12
						1	CMAS04881T19254	0,58	1.28
						1 ¼	CMAS04881T19317	0,58	1.28
						1 ⅜	CMAS04881T19349	0,56	1.23
						1 7/16	CMAS04881T19365	0,54	1.19
						1 ½	CMAS04881T19381	0,54	1.19
21	129,80	5.110	64,90	2.555	25		**CMAS04881T2125**	0,79	1.73
					30		**CMAS04881T2130**	0,77	1.69
					35		**CMAS04881T2135**	0,74	1.64
					40		**CMAS04881T2140**	0,72	1.58
						1	CMAS04881T21254	0,78	1.73
						1 ¼	CMAS04881T21317	0,78	1.73
						1 ⅜	CMAS04881T21349	0,77	1.69
						1 7/16	CMAS04881T21365	0,74	1.64
						1 ½	CMAS04881T21381	0,73	1.60

*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **PHD 9157**
- **PHDG 9157**
- **881T**
- **981T**
- **PHDG 981T**
- **PHD 9857M**
- **PHDG 9857M**
- **982T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



23T & 25T IDLER WHEELS

(for 17T,19T & 21T see previous page)

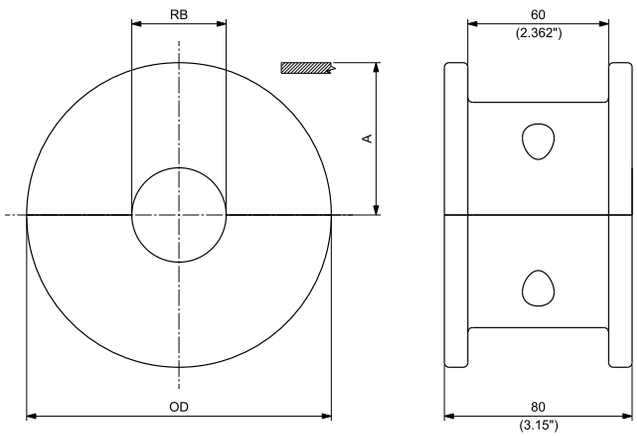

ROUND BORE - IDLER

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
23	142,30	5.602	71,15	2.801	25		**CMAS04881T2325**	0,98	2.17
					30		**CMAS04881T2330**	0,96	2.13
					35		**CMAS04881T2335**	0,94	2.07
					40		**CMAS04881T2340**	0,91	2.01
						1	**CMAS04881T23254**	0,98	2.17
						1 ¼	**CMAS04881T23317**	0,98	2.17
						1 ⅜	**CMAS04881T23349**	0,96	2.13
						1 7⁄16	**CMAS04881T23365**	0,94	2.07
						1 ½	**CMAS04881T23381**	0,92	2.04
25	154,70	6.091	77,35	3.045	25		**CMAS04881T2525**	1,19	2.63
					30		**CMAS04881T2530**	1,17	2.58
					35		**CMAS04881T2535**	1,15	2.53
					40		**CMAS04881T2540**	1,12	2.47
						1	**CMAS04881T25254**	1,19	2.62
						1 ¼	**CMAS04881T25317**	1,19	2.62
						1 ⅜	**CMAS04881T25349**	1,17	2.58
						1 7⁄16	**CMAS04881T25365**	1,15	2.53
						1 ½	**CMAS04881T25381**	1,13	2.50

*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **820**
- **HFX 820**
- **831**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




19T & 21T SPROCKETS


(for 23T & 25T see next page)

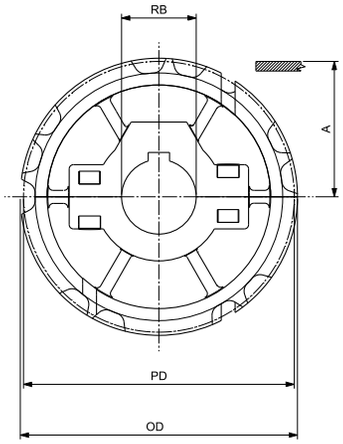

ROUND BORE - DRIVE

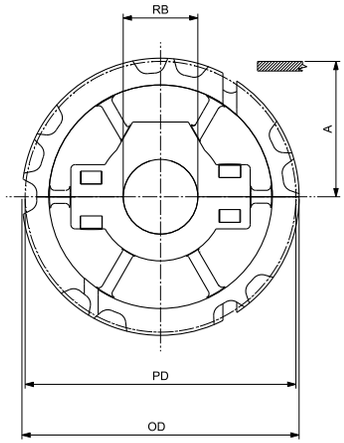

ROUND BORE - IDLER





MOULDED SPLIT IDLER WHEELS
See page 125



MOULDED SOLID IDLER WHEELS
See page 124

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
19	117,34	4.620	117,00	4.606	61,67	2.428	25		**CMT028201901**	**CMT038201901**	0,36	0.79
							30		**CMT028201902**	**CMT038201902**	0,35	0.77
							35		**CMT028201903**	**CMT038201903**	0,34	0.75
							40		**CMT028201904**	**CMT038201904**	0,33	0.73
							45		**CMT028201905**	**CMT038201905**	0,22	0.49
								1	CMT028201906	CMT038201906	0,36	0.79
								1 ¼	CMT028201908	CMT038201908	0,35	0.77
								1 ⅜	CMT028201911	CMT038201911	0,35	0.77
								1 7⁄16	CMT028201909	CMT038201909	0,34	0.75
								1 ½	CMT028201910	CMT038201910	0,33	0.73
21	129,30	5.091	130,00	5.118	68,05	2.679	25		**CMT028202101**	**CMT038202101**	0,48	1.05
							30		**CMT028202102**	**CMT038202102**	0,47	1.03
							35		**CMT028202103**	**CMT038202103**	0,46	1.01
							40		**CMT028202104**	**CMT038202104**	0,45	0.98
							45		**CMT028202105**	**CMT038202105**	0,43	0.95
								1	CMT028202106	CMT038202106	0,48	1.05
								1 ¼	CMT028202108	CMT038202108	0,46	1.02
								1 ⅜	CMT028202111	CMT038202111	0,46	1.02
								1 7⁄16	CMT028202109	CMT038202109	0,45	1.00
								1 ½	CMT028202110	CMT038202110	0,45	0.99

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **820**
- **HFX 820**
- **831**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




23T & 25T SPROCKETS


(for 19T & 21T see previous page)

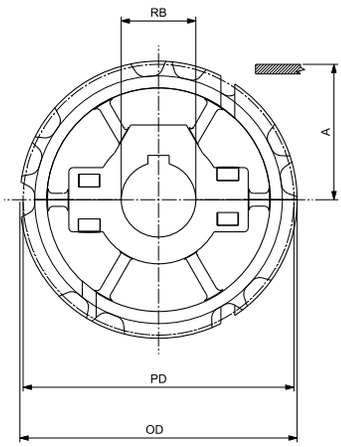

ROUND BORE - DRIVE

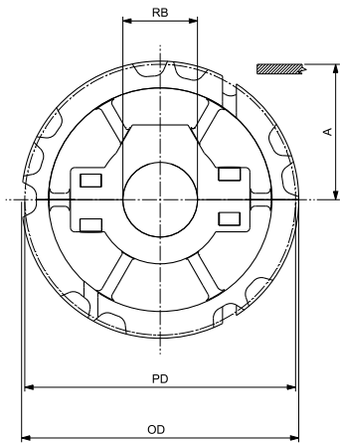

ROUND BORE - IDLER





MOULDED SPLIT IDLER WHEELS
See page 125



MOULDED SOLID IDLER WHEELS
See page 124

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
23	141,20	5.559	141,90	5.587	74,00	2.913	25		**CMT028202301**	**CMT038202301**	0,52	1.15
							30		**CMT028202302**	**CMT038202302**	0,51	1.13
							35		**CMT028202303**	**CMT038202303**	0,50	1.11
							40		**CMT028202304**	**CMT038202304**	0,49	1.08
							45		**CMT028202305**	**CMT038202305**	0,48	1.05
								1	CMT028202306	CMT038202306	0,52	1.15
								1 ¼	CMT028202308	CMT038202308	0,51	1.13
								1 ⅜	CMT028202311	CMT038202311	0,51	1.13
								1 7⁄16	CMT028202309	CMT038202309	0,50	1.10
								1 ½	CMT028202310	CMT038202310	0,50	1.09
25	153,20	6.031	154,20	6.071	80,00	3.150	25		**CMT028202501**	**CMT038202501**	0,57	1.26
							30		**CMT028202502**	**CMT038202502**	0,56	1.24
							35		**CMT028202503**	**CMT038202503**	0,55	1.22
							40		**CMT028202504**	**CMT038202504**	0,54	1.19
							45		**CMT028202505**	**CMT038202505**	0,53	1.16
								1	CMT028202506	CMT038202506	0,57	1.26
								1 ¼	CMT028202508	CMT038202508	0,56	1.23
								1 ⅜	CMT028202511	CMT038202511	0,56	1.23
								1 7⁄16	CMT028202509	CMT038202509	0,55	1.21
								1 ½	CMT028202510	CMT038202510	0,55	1.20


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **820**
- **HFX 820**
- **831**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

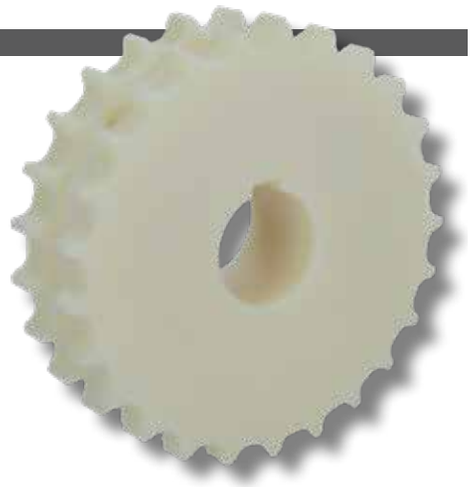


17T, 19T & 21T SPROCKETS


(for 23T, 25T & 27T see next page)

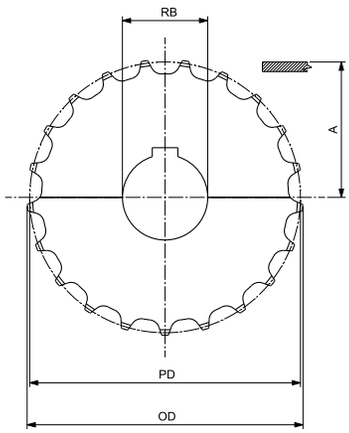

ROUND BORE - DRIVE

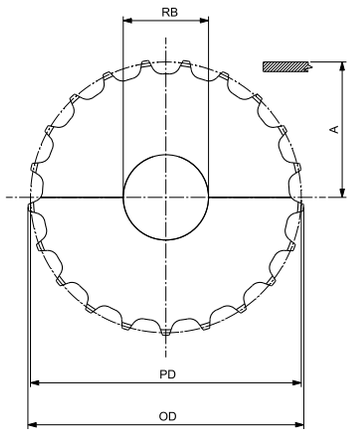

ROUND BORE - IDLER





MACHINED SPLIT IDLER WHEELS
See page 126

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
17	105,47	4.152	104,40	4.110	55,94	2.202	25		**CMAS028201725**	**CMAS038201725**	0,34	0.75
							30		**CMAS028201730**	**CMAS038201730**	0,34	0.73
							35		**CMAS028201735**	**CMAS038201735**	0,32	0.70
							40		**CMAS028201740**	**CMAS038201740**	0,30	0.67
								1	CMAS0282017254	CMAS0382017254	0,34	0.75
								1 ¼	CMAS0282017317	CMAS0382017317	0,33	0.72
								1 ⅜	CMAS0282017349	CMAS0382017349	0,33	0.72
								1 7⁄16	CMAS0282017365	CMAS0382017365	0,32	0.70
								1 ½	CMAS0282017381	CMAS0382017381	0,31	0.68
19	117,34	4.620	117,00	4.606	61,87	2.436	25		**CMAS028201925**	**CMAS038201925**	0,43	0.94
							30		**CMAS028201930**	**CMAS038201930**	0,42	0.92
							35		**CMAS028201935**	**CMAS038201935**	0,40	0.89
							40		**CMAS028201940**	**CMAS038201940**	0,39	0.86
								1	CMAS0282019254	CMAS0382019254	0,43	0.94
								1 ¼	CMAS0282019317	CMAS0382019317	0,43	0.94
								1 ⅜	CMAS0282019349	CMAS0382019349	0,42	0.92
								1 7⁄16	CMAS0282019365	CMAS0382019365	0,40	0.88
								1 ½	CMAS0282019381	CMAS0382019381	0,36	0.79
21	129,26	5.089	129,40	5.094	68,83	2.710	25		**CMAS028202125**	**CMAS038202125**	0,53	1.16
							30		**CMAS028202130**	**CMAS038202130**	0,52	1.14
							35		**CMAS028202135**	**CMAS038202135**	0,51	1.11
							40		**CMAS028202140**	**CMAS038202140**	0,49	1.08
								1	CMAS0282021254	CMAS0382021254	0,53	1.16
								1 ¼	CMAS0282021317	CMAS0382021317	0,53	1.16
								1 ⅜	CMAS0282021349	CMAS0382021349	0,52	1.14
								1 7⁄16	CMAS0282021365	CMAS0382021365	0,51	1.11
								1 ½	CMAS0282021381	CMAS0382021381	0,50	1.10


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **820**
- **HFX 820**
- **831**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

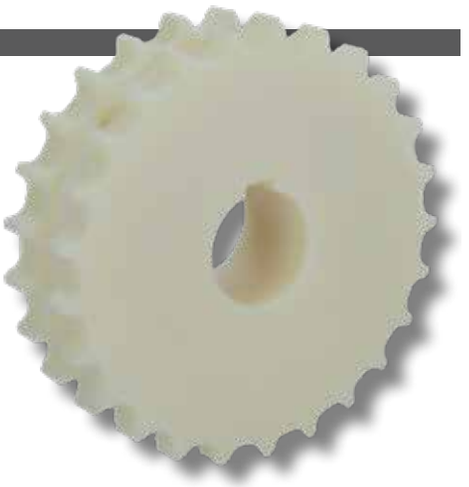


23T, 25T & 27T SPROCKETS


(for 17T, 19T & 21T see previous page)

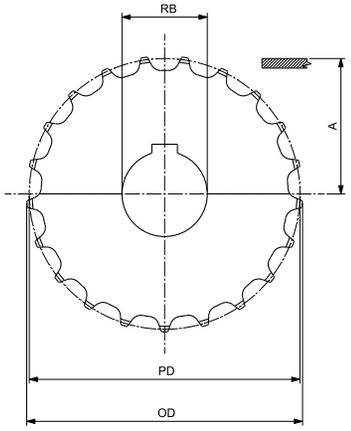

ROUND BORE - DRIVE

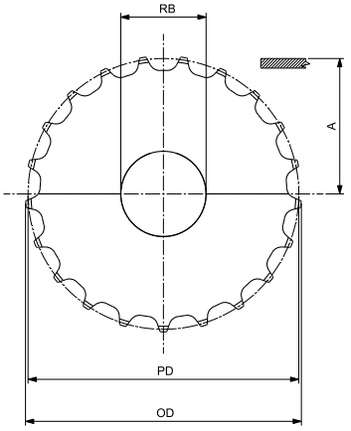

ROUND BORE - IDLER





MACHINED SPLIT IDLER WHEELS

See page 126

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
23	141,22	5.560	141,90	5.587	73,81	2.906	25		**CMAS028202325**	**CMAS038202325**	0,63	1.39
							30		**CMAS028202330**	**CMAS038202330**	0,62	1.37
							35		**CMAS028202335**	**CMAS038202335**	0,61	1.34
							40		**CMAS028202340**	**CMAS038202340**	0,59	1.31
								1	CMAS0282023254	CMAS0382023254	0,63	1.39
								1 ¼	CMAS0282023317	CMAS0382023317	0,63	1.39
								1 ⅜	CMAS0282023349	CMAS0382023349	0,62	1.37
								1 7⁄16	CMAS0282023365	CMAS0382023365	0,61	1.34
								1 ½	CMAS0282023381	CMAS0382023381	0,60	1.32
25	153,20	6.031	154,20	6.071	79,80	3.142	25		**CMAS028202525**	**CMAS038202525**	0,78	1.72
							30		**CMAS028202530**	**CMAS038202530**	0,77	1.69
							35		**CMAS028202535**	**CMAS038202535**	0,76	1.67
							40		**CMAS028202540**	**CMAS038202540**	0,74	1.63
								1	CMAS0282025254	CMAS0382025254	0,78	1.71
								1 ¼	CMAS0282025317	CMAS0382025317	0,78	1.71
								1 ⅜	CMAS0282025349	CMAS0382025349	0,77	1.69
								1 7⁄16	CMAS0282025365	CMAS0382025365	0,76	1.67
								1 ½	CMAS0282025381	CMAS0382025381	0,75	1.65
27	165,21	6.504	166,40	6.551	85,81	3.378	25		**CMAS028202725**	**CMAS038202725**	0,92	2.02
							30		**CMAS028202730**	**CMAS038202730**	0,91	2.03
							35		**CMAS028202735**	**CMAS038202735**	0,90	1.97
							40		**CMAS028202740**	**CMAS038202740**	0,88	1.94
								1	CMAS0282027254	CMAS0382027254	0,92	2.03
								1 ¼	CMAS0282027317	CMAS0382027317	0,92	2.03
								1 ⅜	CMAS0282027349	CMAS0382027349	0,91	2.03
								1 7⁄16	CMAS0282027365	CMAS0382027365	0,90	1.97
								1 ½	CMAS0282027381	CMAS0382027381	0,88	1.94

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **821**
- **HFX 821**
- **LBP 821**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS



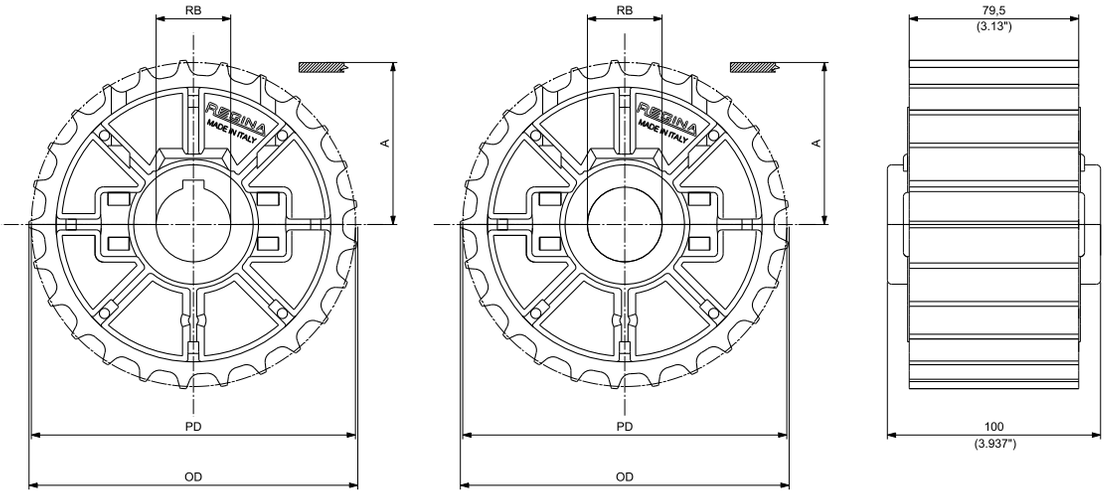

ROUND BORE - DRIVE

ROUND BORE - IDLER

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
25	153,20	6.031	154,20	6.071	79,8	3.142	30		**CMT028212502**	**CMT038212502**	0,98	2.17
							35		**CMT028212503**	**CMT038212503**	0,97	2.13
							40		**CMT028212504**	**CMT038212504**	0,94	2.08
							45		**CMT028212505**	**CMT038212505**	0,91	2.02
								1 ¼	**CMT028212508**	**CMT038212508**	0,98	2.16
								1 ⅜	**CMT028212511**	**CMT038212511**	0,97	2.13
								1 7⁄16	**CMT028212509**	**CMT038212509**	0,96	2.11
								1 ½	**CMT028212510**	**CMT038212510**	0,95	2.10


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **821**
- **HFX 821**
- **LBP 821**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

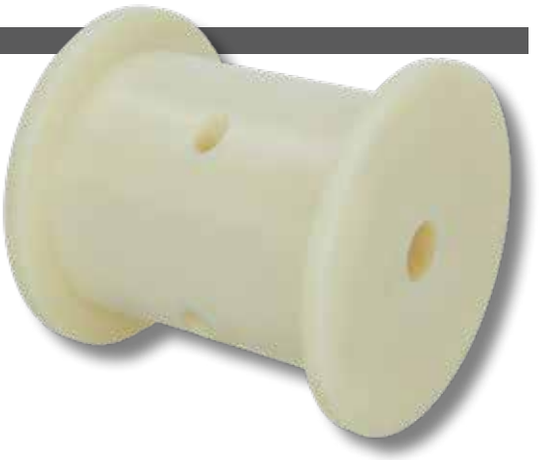

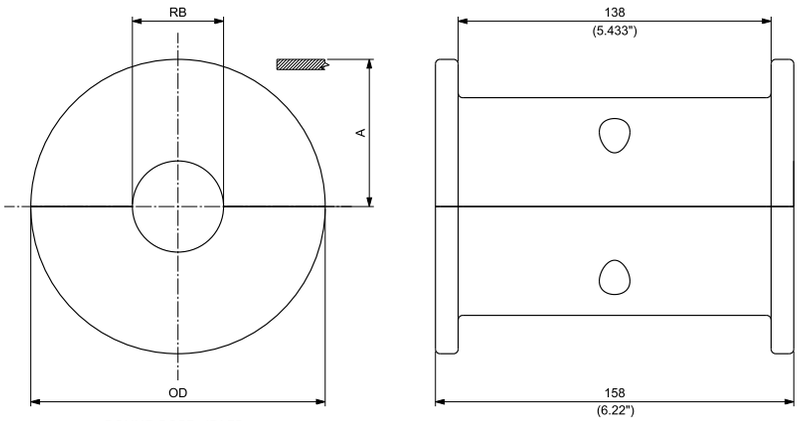

ROUND BORE - IDLER



MACHINED SPLIT SPROCKETS
See page 129

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
19	118,00	4.646	59,00	2.323	25		**CMAS048211925**	1,07	2,36
					30		**CMAS048211930**	1,03	2,27
					35		**CMAS048211935**	0,98	2,17
					40		**CMAS048211940**	0,93	2,05
						1	CMAS0482119254	1,07	2,35
						1 ¼	CMAS0482119317	1,03	2,27
						1 ⅜	CMAS0482119349	0,98	2,17
						1 7⁄16	CMAS0482119365	0,97	2,13
						1 ½	CMAS0482119381	0,88	1.93
21	129,80	5.110	64,90	2.555	25		**CMAS048212125**	1,39	3.05
					30		**CMAS048212130**	1,35	2.97
					35		**CMAS048212135**	1,30	2.87
					40		**CMAS048212140**	1,25	2.75
						1	CMAS0482121254	1,38	3.05
						1 ¼	CMAS0482121317	1,38	3.05
						1 ⅜	CMAS0482121349	1,35	2.97
						1 7⁄16	CMAS0482121365	1,30	2.87
						1 ½	CMAS0482121381	1,27	2.79
23	142,30	5.602	71,15	2.801	25		**CMAS048212325**	1,75	3.87
					30		**CMAS048212330**	1,72	3.78
					35		**CMAS048212335**	1,67	3.68
					40		**CMAS048212340**	1,62	3.56
						1	CMAS0482123254	1,75	3.86
						1 ¼	CMAS0482123317	1,75	3.86
						1 ⅜	CMAS0482123349	1,72	3.78
						1 7⁄16	CMAS0482123365	1,67	3.68
						1 ½	CMAS0482123381	1,64	3.61
25	154,70	6.091	77,35	3.045	25		**CMAS048212525**	2,16	4.75
					30		**CMAS048212530**	2,12	4.67
					35		**CMAS048212535**	2,07	4.56
					40		**CMAS048212540**	2,02	4.45
						1	CMAS0482125254	2,15	4.75
						1 ¼	CMAS0482125317	2,15	4.75
						1 ⅜	CMAS0482125349	2,12	4.67
						1 7⁄16	CMAS0482125365	2,07	4.56
						1 ½	CMAS0482125381	2,04	4.49

*Diameter is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **828**
- **880 / 880T / 880TA / 880M RG**
- **HFX 880T**
- **879 / 879T**
- **878T**
- **EW 878T / GW 878T**
  GD 878T

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




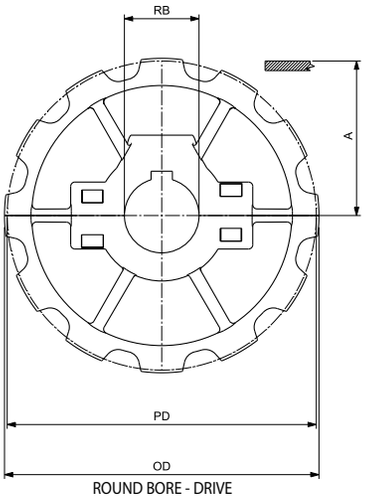

ROUND BORE - DRIVE

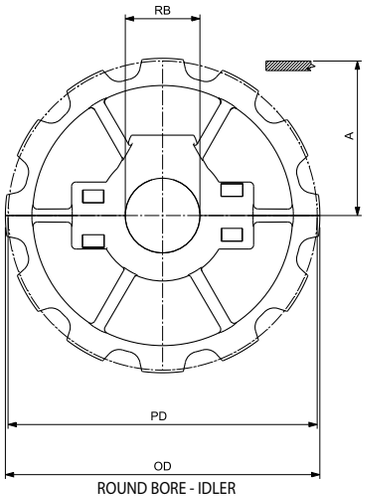

ROUND BORE - IDLER

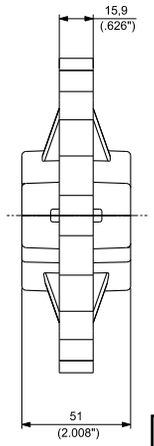



MOULDED SPLIT IDLER WHEELS FOR 880 / 880M RG / 879 CHAINS
See page 125



MOULDED SOLID IDLER WHEELS FOR 880 / 880M RG / 879 CHAINS
See page 124

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
10	123,29	4.854	124,50	4.902	65,25	2.569	25		**CMT028801001**	**CMT038801001**	0,31	0.68
							30		**CMT028801002**	**CMT038801002**	0,30	0.66
							35		**CMT028801003**	**CMT038801003**	0,29	0.64
							40		**CMT028801004**	**CMT038801004**	0,28	0.62
								1	CMT028801006	CMT038801006	0,31	0.67
								1 ¼	CMT028801008	CMT038801008	0,30	0.65
								1 ⅜	CMT028801011	CMT038801011	0,30	0.65
								1 7⁄16	CMT028801009	CMT038801009	0,29	0.64
								1 ½	CMT028801010	CMT038801010	0,29	0.64
12	147,21	5.796	147,30	5.799	77,21	3.040	25		**CMT028801201**	**CMT038801201**	0,42	0.93
							30		**CMT028801202**	**CMT038801202**	0,41	0.91
							35		**CMT028801203**	**CMT038801203**	0,40	0.88
							40		**CMT028801204**	**CMT038801204**	0,39	0.86
							45		**CMT028801205**	**CMT038801205**	0,37	0.82
								1	CMT028801206	CMT038801206	0,41	0.91
								1 ¼	CMT028801208	CMT038801208	0,41	0.90
								1 ⅜	CMT028801211	CMT038801211	0,40	0.88
								1 7⁄16	CMT028801209	CMT038801209	0,40	0.88
								1 ½	CMT028801210	CMT038801210	0,39	0.87

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **828**
- **880 / 880T / 880TA / 880M RG**
- **HFX 880T**
- **879 / 879T**
- **878T**
- **EW 878T / GW 878T GD 878T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS




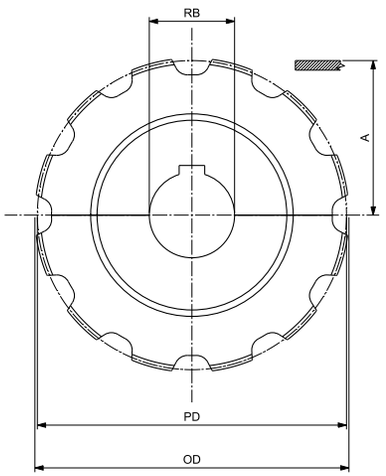

ROUND BORE - DRIVE

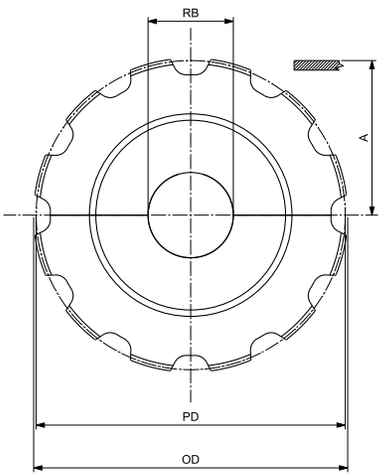

ROUND BORE - IDLER

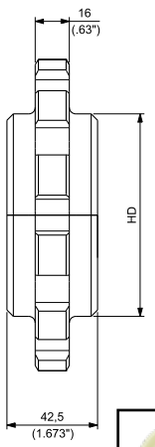



MACHINED SPLIT IDLER WHEELS FOR 880 / 880M RG / 879 CHAINS
See page 126

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
9	111,40	4.386	109,80	4.323	59,30	2.335	75	2.95	25		**CMAS028800925**	**CMAS038800925**	0,30	0.66
									30		**CMAS028800930**	**CMAS038800930**	0,29	0.64
									35		**CMAS028800935**	**CMAS038800935**	0,28	0.61
									40		**CMAS028800940**	**CMAS038800940**	0,26	0.58
										1	CMAS0288009254	CMAS0388009254	0,30	0.66
										1 ¼	CMAS0288009317	CMAS0388009317	0,29	0.64
										1 ½	CMAS0288009381	CMAS0388009381	0,28	0.61
10	123,29	4.854	124,50	4.902	65,55	2.581	85	3.35	25		**CMAS028801025**	**CMAS038801025**	0,38	0.83
									30		**CMAS028801030**	**CMAS038801030**	0,37	0.81
									35		**CMAS028801035**	**CMAS038801035**	0,35	0.78
									40		**CMAS028801040**	**CMAS038801040**	0,34	0.75
										1	CMAS0288010254	CMAS0388010254	0,38	0.83
										1 ¼	CMAS0288010317	CMAS0388010317	0,37	0.81
										1 ½	CMAS0288010381	CMAS0388010381	0,35	0.76
11	135,24	5.324	134,90	5.311	71,22	2.804	90	3.54	25		**CMAS028801125**	**CMAS038801125**	0,43	0.95
									30		**CMAS028801130**	**CMAS038801130**	0,42	0.93
									35		**CMAS028801135**	**CMAS038801135**	0,41	0.90
									40		**CMAS028801140**	**CMAS038801140**	0,40	0.87
										1	CMAS0288011254	CMAS0388011254	0,43	0.95
										1 ¼	CMAS0288011317	CMAS0388011317	0,41	0.90
										1 ½	CMAS0288011381	CMAS0388011381	0,40	0.88
12	147,21	5.796	147,30	5.799	77,21	3.040	95	3.74	25		**CMAS028801225**	**CMAS038801225**	0,53	1.17
									30		**CMAS028801230**	**CMAS038801230**	0,52	1.14
									35		**CMAS028801235**	**CMAS038801235**	0,51	1.12
									40		**CMAS028801240**	**CMAS038801240**	0,49	1.09
										1	CMAS0288012254	CMAS0388012254	0,53	1.17
										1 ¼	CMAS0288012317	CMAS0388012317	0,51	1.12
										1 ½	CMAS0288012381	CMAS0388012381	0,50	1.10

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **880T / HFX 880T / 880TA**
- **879T**
- **878T**
- **EW 878T / GW 878T / GD 878T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



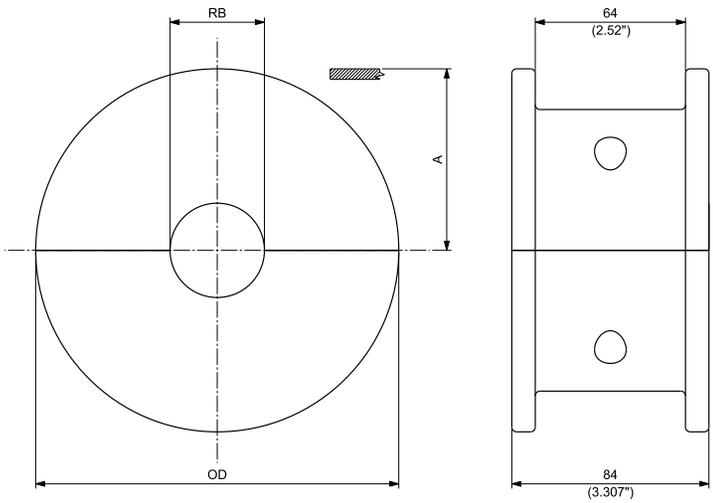

ROUND BORE - IDLER

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
9	118,00	4.646	59,00	2.323	25		**CMAS04880T0925**	0,64	1.41
					30		**CMAS04880T0930**	0,62	1.36
					35		**CMAS04880T0935**	0,59	1.31
					40		**CMAS04880T0940**	0,57	1.25
						1	CMAS04880T09254	0,64	1.41
						1 ¼	CMAS04880T09317	0,62	1.36
						1 ½	CMAS04880T09381	0,59	1.31
10	129,80	5.110	64,90	2.555	25		**CMAS04880T1025**	0,82	1.80
					30		**CMAS04880T1030**	0,80	1.75
					35		**CMAS04880T1035**	0,77	1.70
					40		**CMAS04880T1040**	0,74	1.64
						1	CMAS04880T10254	0,82	1.80
						1 ¼	CMAS04880T10317	0,77	1.70
						1 ½	CMAS04880T10381	0,75	1.66
11	142,30	5.602	71,15	2.801	25		**CMAS04880T1125**	1,02	2.25
					30		**CMAS04880T1130**	1,00	2.20
					35		**CMAS04880T1135**	0,98	2.15
					40		**CMAS04880T1140**	0,95	2.09
						1	CMAS04880T11254	1,02	2.25
						1 ¼	CMAS04880T11317	0,98	2.15
						1 ½	CMAS04880T11381	0,96	2.11
12	154,70	6.091	77,35	3.045	25		**CMAS04880T1225**	1,24	2.74
					30		**CMAS04880T1230**	1,22	2.69
					35		**CMAS04880T1235**	1,20	2.64
					40		**CMAS04880T1240**	1,17	2.57
						1	CMAS04880T12254	1,24	2.73
						1 ¼	CMAS04880T12317	1,20	2.64
						1 ½	CMAS04880T12381	1,18	2.60

*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SPROCKETS - **882 SERIES**

SUITABLE FOR CHAINS:


- **8257**
- **HFX 8257**
- **LBP 8257**
- **882 / 882T / 882M**
- **HFX 882T / HFX 882M**
- **LBP 882T / LBP 882M**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B+NC	NICKEL PLATED BRASS




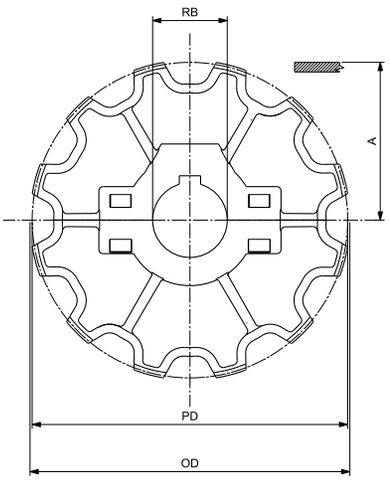

ROUND BORE - DRIVE

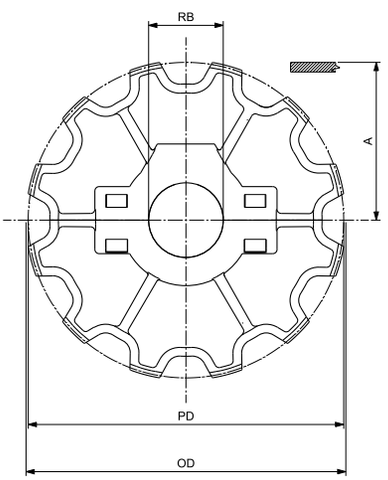

ROUND BORE - IDLER



MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
10	123,29	4.854	124,50	4.902	66,35	2.612	25		**CMT028821001**	**CMT038821001**	0,30	0.65
							30		**CMT028821002**	**CMT038821002**	0,29	0.64
							35		**CMT028821003**	**CMT038821003**	0,28	0.62
							40		**CMT028821004**	**CMT038821004**	0,27	0.60
								1	CMT028821006	CMT038821006	0,30	0.65
								1 ¼	CMT028821008	CMT038821008	0,30	0.65
								1 ⅜	CMT028821011	CMT038821011	0,29	0.64
								1 7⁄16	CMT028821009	CMT038821009	0,28	0.62
								1 ½	CMT028821010	CMT038821010	0,27	0.60
12	147,21	5.796	150,00	5.906	78,31	3.083	25		**CMT028821201**	**CMT038821201**	0,40	0.88
							30		**CMT028821202**	**CMT038821202**	0,39	0.86
							35		**CMT028821203**	**CMT038821203**	0,38	0.83
							40		**CMT028821204**	**CMT038821204**	0,37	0.81
							45		**CMT028821205**	**CMT038821205**	0,35	0.78
								1	CMT028821206	CMT038821206	0,39	0.86
								1 ¼	CMT028821208	CMT038821208	0,39	0.85
								1 ⅜	CMT028821211	CMT038821211	0,38	0.83
								1 7⁄16	CMT028821209	CMT038821209	0,37	0.81
								1 ½	CMT028821210	CMT038821210	0,35	0.78


*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **8257**
- **HFX 8257**
- **LBP 8257**
- **882 / 882T / 882M**
- **HFX 882T / HFX 882M**
- **LBP 882T / LBP 882M**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

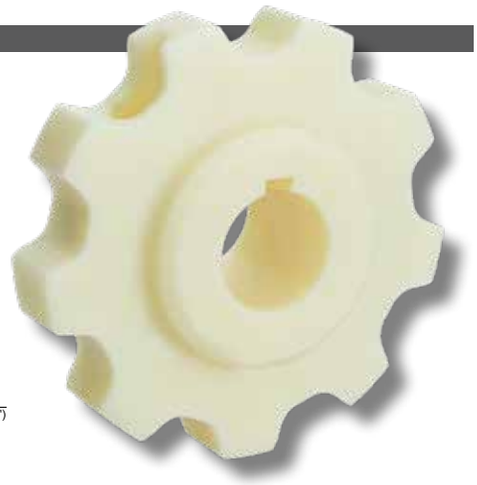


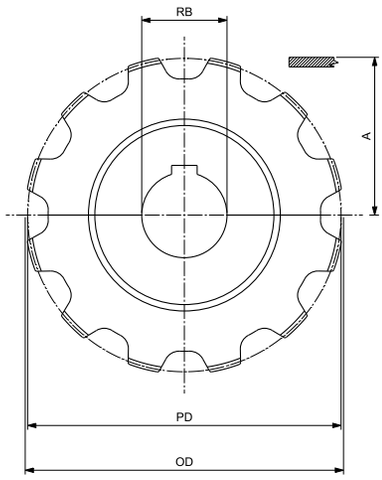

ROUND BORE - DRIVE

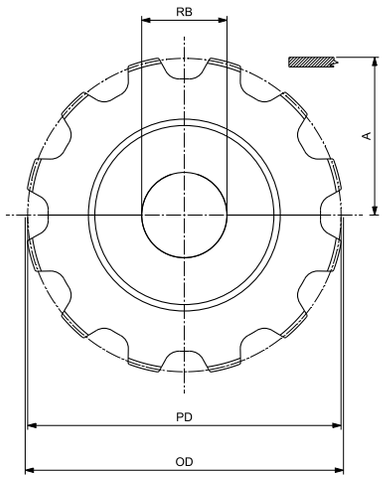

ROUND BORE - IDLER

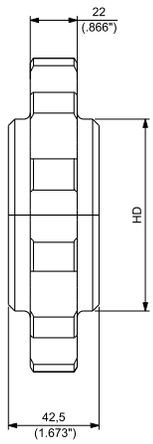

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
9	111,40	4.386	109,80	4.323	60,40	2.378	60	2.36	25		**CMAS028820925**	**CMAS038820925**	0,28	0.62
									30		**CMAS028820930**	**CMAS038820930**	0,27	0.60
									35		**CMAS028820935**	**CMAS038820935**	0,26	0.57
									40		**CMAS028820940**	**CMAS038820940**	0,25	0.54
										1	CMAS0288209254	CMAS0388209254	0,28	0.62
										1 ¼	CMAS0288209317	CMAS0388209317	0,27	0.59
										1 ½	CMAS0288209381	CMAS0388209381	0,25	0.55
10	123,29	4.878	122,40	4.819	66,65	2.624	75	2.95	25		**CMAS028821025**	**CMAS038821025**	0,37	0.82
									30		**CMAS028821030**	**CMAS038821030**	0,36	0.80
									35		**CMAS028821035**	**CMAS038821035**	0,35	0.77
									40		**CMAS028821040**	**CMAS038821040**	0,34	0.74
										1	CMAS0288210254	CMAS0388210254	0,37	0.82
										1 ¼	CMAS0288210317	CMAS0388210317	0,35	0.76
										1 ½	CMAS0288210381	CMAS0388210381	0,30	0.67
11	135,24	5.324	134,90	5.311	72,32	2.874	85	3.35	25		**CMAS028821125**	**CMAS038821125**	0,45	1.00
									30		**CMAS028821130**	**CMAS038821130**	0,44	0.98
									35		**CMAS028821135**	**CMAS038821135**	0,43	0.95
									40		**CMAS028821140**	**CMAS038821140**	0,42	0.92
										1	CMAS0288211254	CMAS0388211254	0,45	1.00
										1 ¼	CMAS0288211317	CMAS0388211317	0,43	0.95
										1 ½	CMAS0288211381	CMAS0388211381	0,42	0.93
12	147,21	5.796	147,30	5.799	78,31	3.083	90	3.54	25		**CMAS028821225**	**CMAS038821225**	0,56	1.24
									30		**CMAS028821230**	**CMAS038821230**	0,55	1.21
									35		**CMAS028821235**	**CMAS038821235**	0,54	1.18
									40		**CMAS028821240**	**CMAS038821240**	0,52	1.15
										1	CMAS0288212254	CMAS0388212254	0,56	1.23
										1 ¼	CMAS0288212317	CMAS0388212317	0,54	1.18
										1 ½	CMAS0288212381	CMAS0388212381	0,53	1.17

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **882T**
- **HFX 882T**
- **LBP 882T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



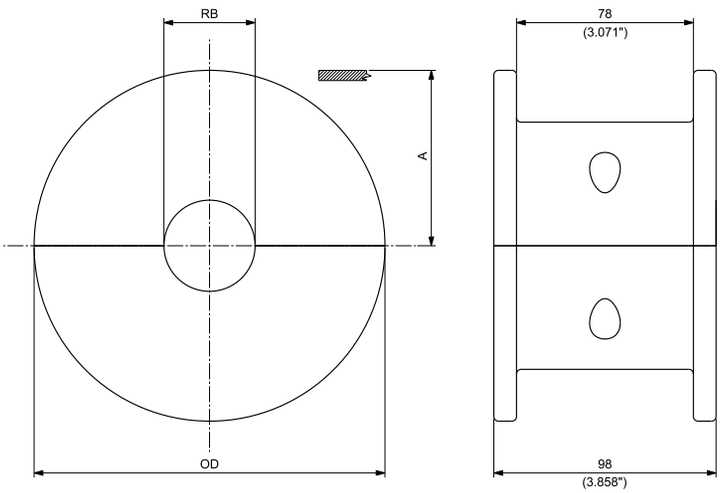

ROUND BORE - IDLER

MACHINED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD mm	OUTSIDE DIAMETER OD inch	WEAR STRIP POSITIONING A mm	WEAR STRIP POSITIONING A inch	BORE SIZE* mm	BORE SIZE* inch	PART NUMBER ROUND BORE RB IDLER	WEIGHT Kg	WEIGHT lbs
9	118,00	4.646	59,00	2.323	25		**CMAS04882T0925**	0,59	1.30
					30		**CMAS04882T0930**	0,57	1.25
					35		**CMAS04882T0935**	0,54	1.18
					40		**CMAS04882T0940**	0,50	1.11
						1	**CMAS04882T09254**	0,59	1.30
						1 ¼	**CMAS04882T09317**	0,56	1.23
						1 ½	**CMAS04882T09381**	0,52	1.14
10	129,80	5.110	64,90	2.555	25		**CMAS04882T1025**	0,79	1.74
					30		**CMAS04882T1030**	0,76	1.67
					35		**CMAS04882T1045**	0,73	1.60
					40		**CMAS04882T1040**	0,69	1.53
						1	**CMAS04882T10254**	0,78	1.72
						1 ¼	**CMAS04882T10317**	0,72	1.58
						1 ½	**CMAS04882T10381**	0,62	1.37
11	142,30	5.602	71,15	2.801	25		**CMAS04882T1125**	0,98	2.17
					30		**CMAS04882T1130**	0,96	2.12
					35		**CMAS04882T1135**	0,93	2.05
					40		**CMAS04882T1140**	0,90	1.98
						1	**CMAS04882T11254**	0,98	2.17
						1 ¼	**CMAS04882T11317**	0,93	2.05
						1 ½	**CMAS04882T11381**	0,91	2.01
12	154,70	6.091	77,35	3.045	25		**CMAS04882T1225**	1,24	2.74
					30		**CMAS04882T1230**	1,22	2.69
					35		**CMAS04882T1235**	1,19	2.62
					40		**CMAS04882T1240**	1,16	2.55
						1	**CMAS04882T12254**	1,24	2.74
						1 ¼	**CMAS04882T12317**	1,19	2.62
						1 ½	**CMAS04882T12381**	1,17	2.58


*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **843**
- **845**
- **RR 845**
- **HF RR 845**
- **1843T**
- **EW 1843T**

MATERIALS		
SPROCKETS:	S	CARBON STEEL

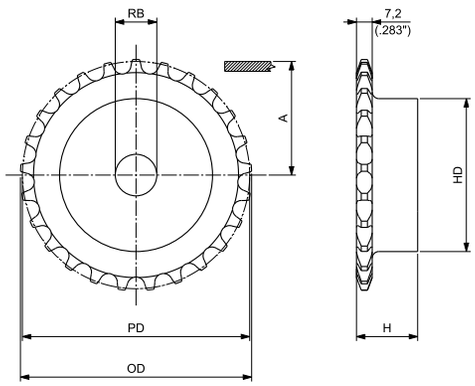

MACHINED SOLID SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		H		BORE SIZE**		PART NUMBER ROUND BORE RB	WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		Kg	lbs
13*	53,07	2.089	59,20	2.331	32,44	1.277	37	1.46	28	1.10	10	0.39	**CMA028431300**	0,28	0.62
15*	61,09	2.405	67,20	2.646	36,45	1.435	45	1.76	28	1.10	10	0.39	**CMA028431500**	0,41	0.90
17*	69,11	2.721	75,20	2.961	40,46	1.593	52	2.05	28	1.10	12	0.47	**CMA028431700**	0,54	1.19
19	77,16	3.038	83,30	3.280	44,48	1.751	60	2.36	28	1.10	12	0.47	**CMA028431900**	0,70	1.54
21	85,22	3.355	91,30	3.594	48,51	1.910	68	2.68	28	1.10	14	0.55	**CMA028432100**	0,89	1.96
23	93,27	3.672	99,40	3.913	52,54	2.068	70	2.76	28	1.10	14	0.55	**CMA028432300**	0,98	2.16
25	101,33	3.989	107,40	4.228	56,57	2.227	70	2.76	28	1.10	14	0.55	**CMA028432500**	1,06	2.34
27	109,40	4.307	115,50	4.547	60,60	2.386	70	2.76	30	1.18	16	0.63	**CMA028432700**	1,17	2.58
29	117,46	4.624	123,60	4.866	64,63	2.544	80	3.15	30	1.18	16	0.63	**CMA028432900**	1,47	3.24
31	125,54	4.943	131,60	5.181	68,67	2.704	90	3.54	30	1.18	16	0.63	**CMA028433100**	1,79	3.95
33	133,61	5.260	139,70	5.500	72,71	2.863	90	3.54	30	1.18	16	0.63	**CMA028433300**	1,88	4.14

*Cannot work with 1843T and EW 1843T series.
**Diameter is indicated (plain bore).


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **1864 / 1874T**
- **863**
- **1863T**
- **1873T**
- **HFX 1873T**
- **GV 1874T / EV 1874T**
- **GW 1873T / EW 1873T / GD 1873T / GS 1873T**
- **GC 1873T**

MATERIALS

SPROCKETS: S CARBON STEEL

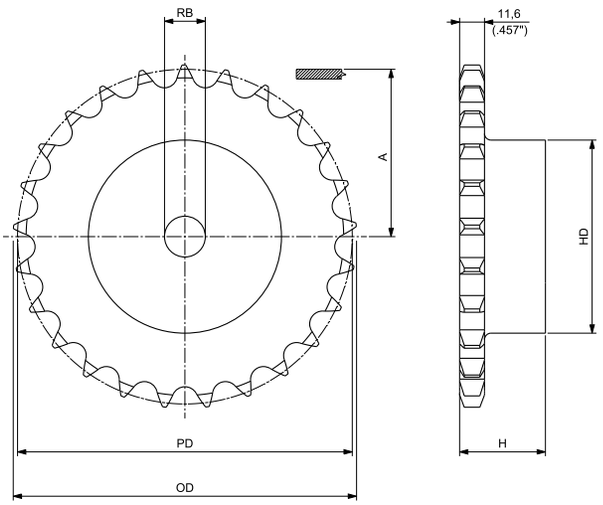

MACHINED SOLID SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		H		BORE SIZE**		PART NUMBER ROUND BORE RB	WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		Kg	lbs
15*	91,63	3.607	100,00	3.937	56,22	2.213	70	2.76	35	1.38	16	0.63	**CMA028631500**	1,26	2.78
17*	103,67	4.081	112,00	4.409	62,24	2.450	80	3.15	35	1.38	16	0.63	**CMA028631700**	1,67	3.68
19	115,75	4.557	124,10	4.886	68,28	2.688	80	3.15	35	1.38	16	0.63	**CMA028631900**	1,82	4.01
21	127,82	5.032	136,20	5.362	74,31	2.926	90	3.54	40	1.57	20	0.79	**CMA028632100**	2,48	5.47
23	139,90	5.508	148,20	5.835	80,35	3.163	90	3.54	40	1.57	20	0.79	**CMA028632300**	2,71	5.97
25	152,00	5.984	160,30	6.311	86,40	3.402	90	3.54	40	1.57	20	0.79	**CMA028632500**	2,91	6.42
27	164,09	6.460	172,40	6.787	92,45	3.640	95	3.74	40	1.57	20	0.79	**CMA028632700**	3,39	7.47
29	176,19	6.937	184,50	7.264	98,50	3.878	95	3.74	40	1.57	20	0.79	**CMA028632900**	3,68	8.11
31	188,31	7.414	196,60	7.740	104,56	4.116	95	3.74	40	1.57	20	0.79	**CMA028633100**	4,18	9,22

*Cannot work with 1863T, 1873T, 1864, 1874T, HFX 1873T, EV 1874T, GD 1874T, GW 1873T, EW 1873T, GD 1873T, GS 1873T and GC 1873T series.
**Diameter is indicated (plain bore).


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **1883**
- **HFX 1883**

MATERIALS

SPROCKETS: S CARBON STEEL

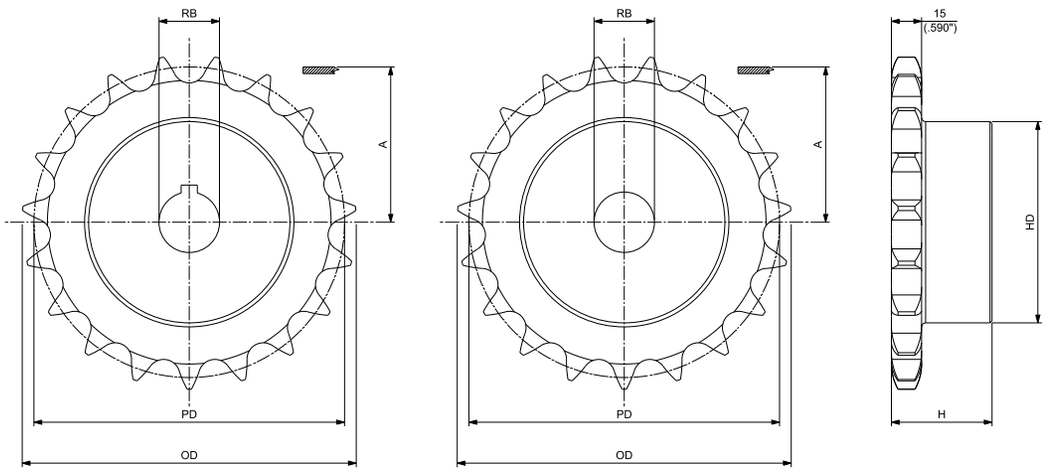

ROUND BORE - DRIVE

ROUND BORE - IDLER

MACHINED SOLID SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		H		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	DRIVE	IDLER	Kg	lbs
19	154,14	6.609	166,00	6.535	93,97	3.678	100	3.937	45	1.772	40		**CMA0218831904**	**CMA0318831904**	3,70	8.16
												1 ½	**CMA0218831910**	**CMA0318831910**	3,70	8.16

*Diameter is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1700**
- **1702**
- **1701T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS




8T & 10T SPROCKETS


(for 12T & 13T see next page)

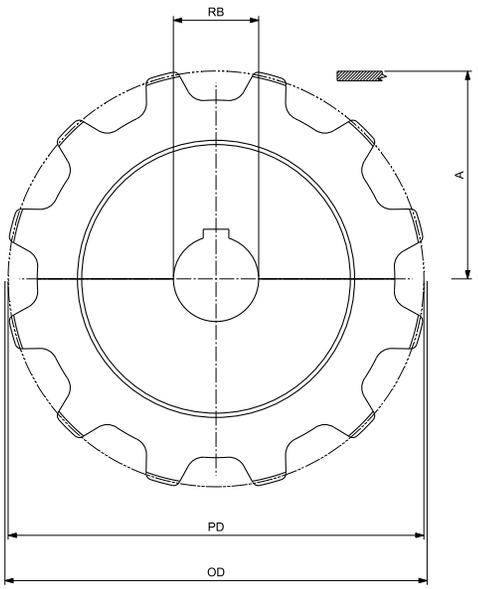

ROUND BORE - DRIVE

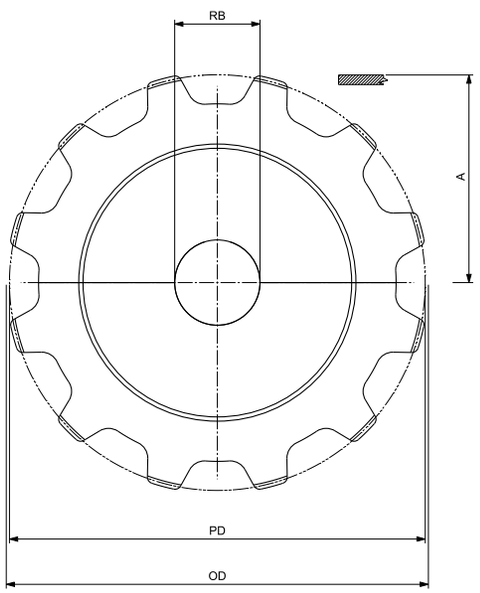

ROUND BORE - IDLER

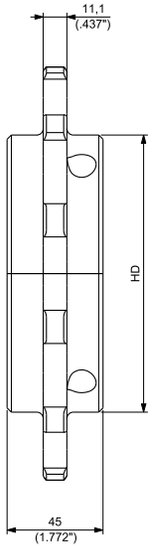

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
8	130,66	5.144	132,30	5.209	53,33	2.100	80	3.15	25		**CMAS0217000825**	**CMAS0317000825**	0,34	0.75
									30		**CMAS0217000830**	**CMAS0317000830**	0,33	0.73
									35		**CMAS0217000835**	**CMAS0317000835**	0,32	0.70
									40		**CMAS0217000840**	**CMAS0317000840**	0,30	0.66
										1	CMAS02170008254	CMAS03170008254	0,34	0.75
										1 ¼	CMAS02170008317	CMAS03170008317	0,33	0.73
										1 ⅜	CMAS02170008349	CMAS03170008349	0,32	0.70
										1 7⁄16	CMAS02170008365	CMAS03170008365	0,31	0.68
										1 ½	CMAS02170008381	CMAS03170008381	0,30	0.66
10	161,80	6.370	165,20	6.504	68,90	2.713	110	4.33	25		**CMAS0217001025**	**CMAS0317001025**	0,60	1.32
									30		**CMAS0217001030**	**CMAS0317001030**	0,59	1.30
									35		**CMAS0217001035**	**CMAS0317001035**	0,57	1.27
									40		**CMAS0217001040**	**CMAS0317001040**	0,56	1.23
										1	CMAS02170010254	CMAS03170010254	0,61	1.34
										1 ¼	CMAS02170010317	CMAS03170010317	0,60	1.32
										1 ⅜	CMAS02170010349	CMAS03170010349	0,59	1.30
										1 7⁄16	CMAS02170010365	CMAS03170010365	0,57	1.27
										1 ½	CMAS02170010381	CMAS03170010381	0,56	1.23

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1700**
- **1702**
- **1701T**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



12T & 13T SPROCKETS

(for 8T & 10T see previous page)

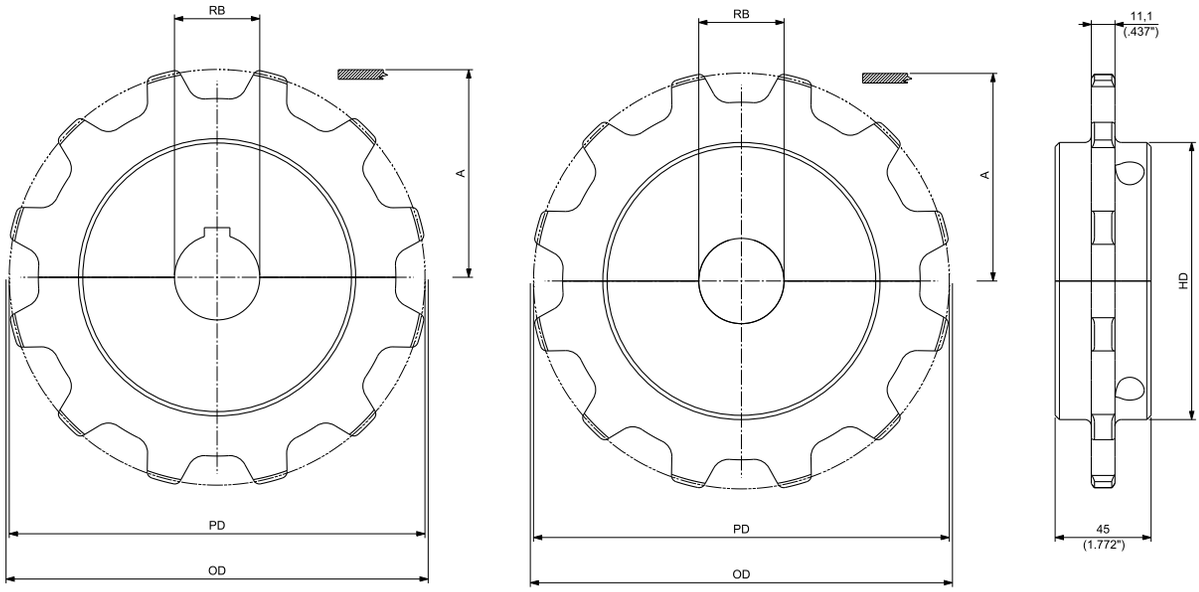

ROUND BORE - DRIVE

ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
12	193,19	7.606	198,00	7.795	84,60	3.331	130	5.12	25		**CMAS0217001225**	**CMAS0317001225**	0,84	1.85
									30		**CMAS0217001230**	**CMAS0317001230**	0,83	1.83
									35		**CMAS0217001235**	**CMAS0317001235**	0,82	1.80
									40		**CMAS0217001240**	**CMAS0317001240**	0,80	1.77
										1	CMAS02170012254	CMAS03170012254	0,84	1.85
										1 ¼	CMAS02170012317	CMAS03170012317	0,84	1.85
										1 ⅜	CMAS02170012349	CMAS03170012349	0,83	1.83
										1 7⁄16	CMAS02170012365	CMAS03170012365	0,82	1.80
										1 ½	CMAS02170012381	CMAS03170012381	0,81	1.78
13	208,93	8.226	214,20	8.433	92,47	3.641	150	5.91	25		**CMAS0217001325**	**CMAS0317001325**	0,84	1.85
									30		**CMAS0217001330**	**CMAS0317001330**	0,83	1.83
									35		**CMAS0217001335**	**CMAS0317001335**	0,82	1.80
									40		**CMAS0217001340**	**CMAS0317001340**	0,80	1.77
										1	CMAS02170013254	CMAS03170013254	0,84	1.85
										1 ¼	CMAS02170013317	CMAS03170013317	0,84	1.85
										1 ⅜	CMAS02170013349	CMAS03170013349	0,83	1.83
										1 7⁄16	CMAS02170013365	CMAS03170013365	0,82	1.80
										1 ½	CMAS02170013381	CMAS03170013381	0,81	1.78

*Diameter is indicated.


** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION



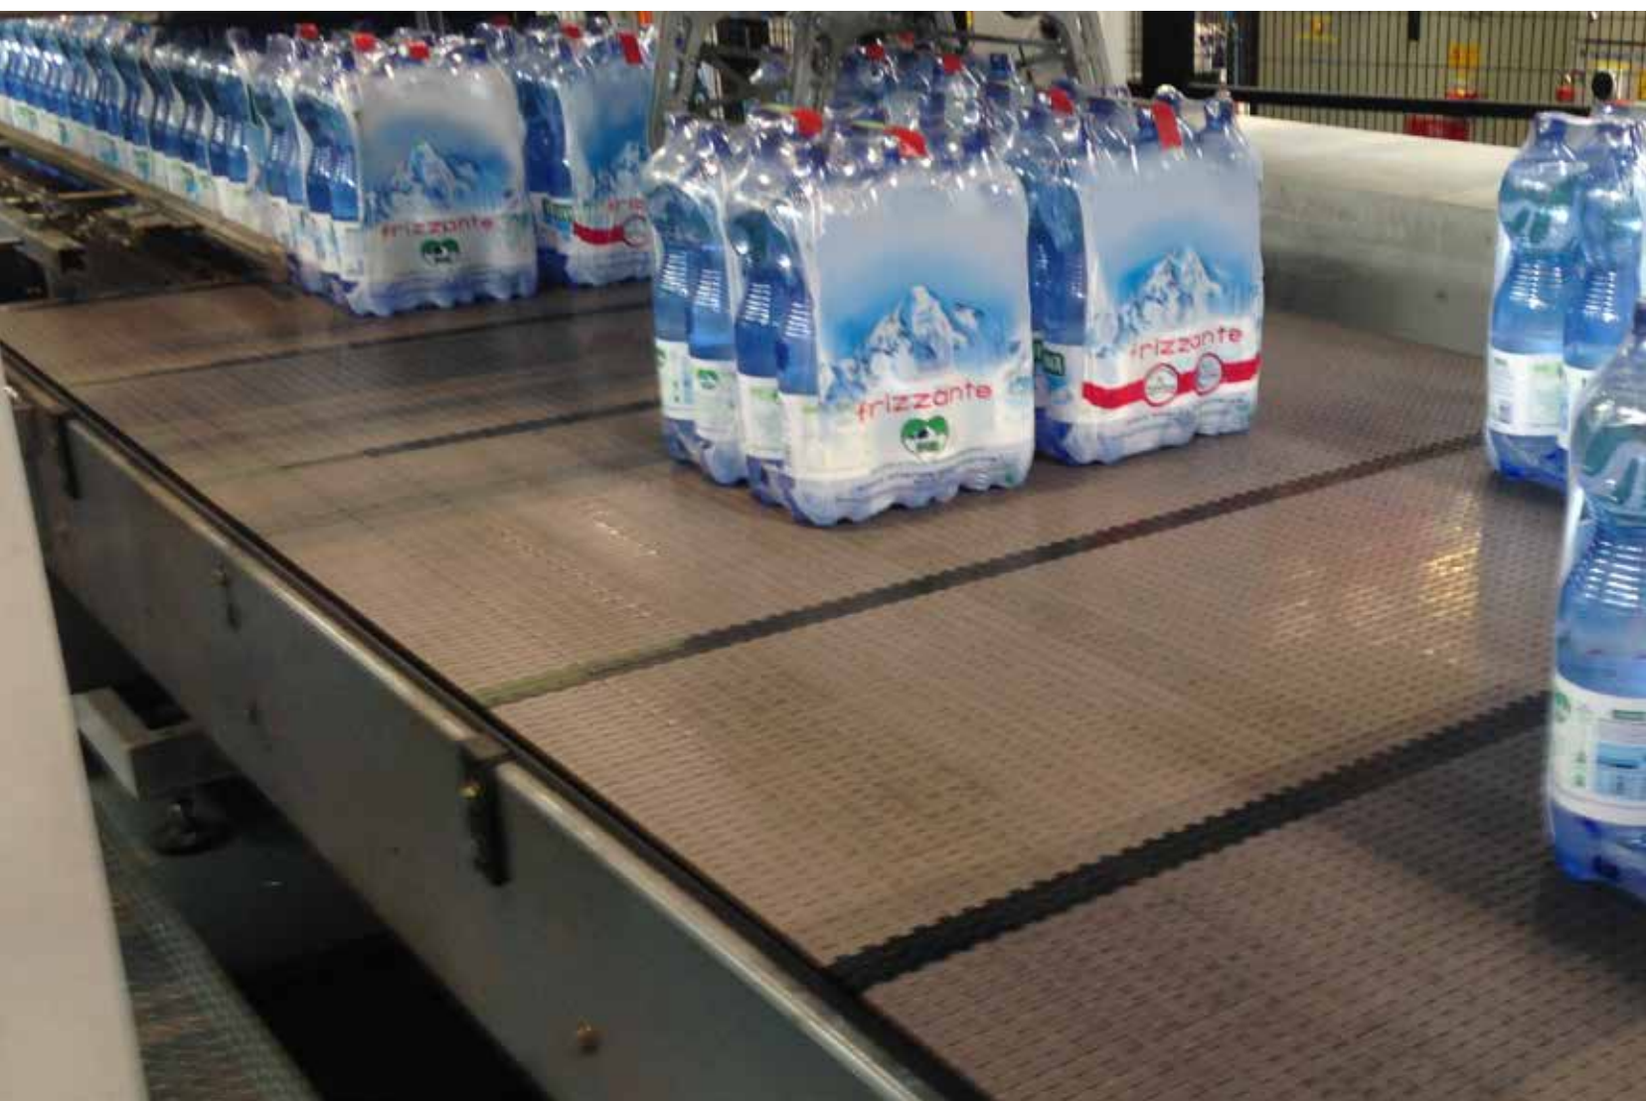

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®








REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

8mm Nanopitch Belt



INDUSTRIES AND APPLICATIONS

Suitable for handling unstable and delicate products with small foot-print (loose or packaged) in a nose-over linear transfer from the head of one conveyor to the next one.

INDUSTRIES

Bottling and canning

Food filling

Container manufacturing

Pharmaceutical

Paper/cardboard

Consumer goods

APPLICATIONS


Infeed/outfeed packaging machines

Product handling within packaging machine

Dynamic alternative to the dead transfer plate between two conveyors equipped with longer pitch belts that do not allow for direct tight product transfer

FEATURES

- Super-short pitch of 8 mm (0.315"), with no chordal effect in the engagement with sprockets or nosebar, allowing the maximization of product stability during head transfer.

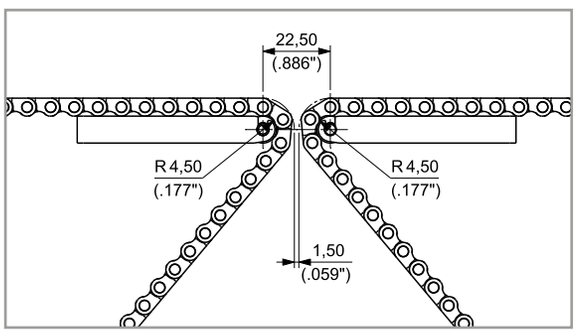

- Pinless and clipless snap-on assembly, easing belt installation and eliminating complexity related to belt closing junction.

- Highest mechanical strength among all 8 mm pitch belts available on the market with independent pin assembly.



Mplveyor

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BELT ASSEMBLY





1) Bring the two ends of the belt close to each other on the conveyor. In order to guarantee the brick-lay assembly of the belt, make sure to always link 3" modules to 6" modules at belt edges.



2) Position hinge end over pin end, making sure that each hinge is matched with its corresponding pin.

REQUIRED TOOLS
- Plastic hammer

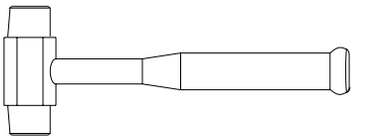

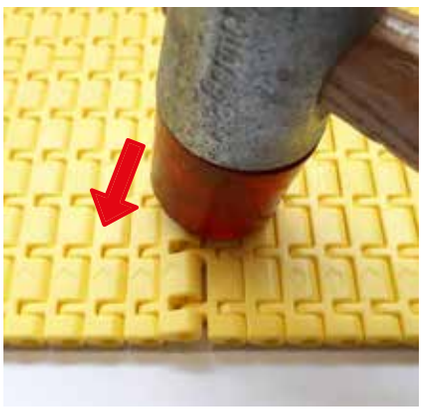

3) Starting from one edge of the belt, gently hammer the hinges into the corresponding pins along the belt width, by means of a plastic hammer. When the operation is completed, please remember to check that hinge and pins are jointed correctly.

BELT DISASSEMBLY





1) Insert the mounting pin under the hinges of the belt to be disassembled.




2) Insert the screwdriver into the space between the hinges.
NOTE: The screwdriver should have the dimensions indicated above.

REQUIRED TOOLS
- Pin with 6 mm diameter and length L= belt width + 40 mm
- Screwdriver:

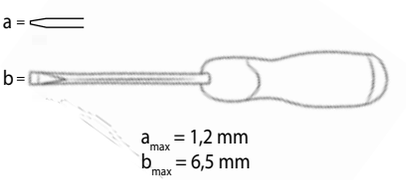

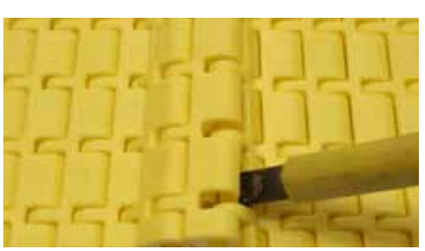

3) Slightly leverage the screwdriver to separate the pins from their corresponding hinges.
DO NOT ROTATE THE SCREWDRIVER.

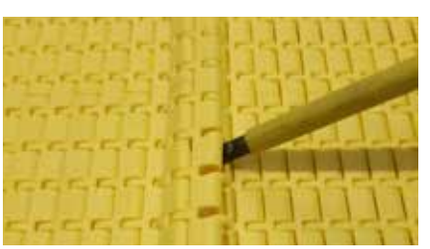

4) Repeat the previous operation along the belt width, acting on as many hinges as needed, until the belt comes apart completely.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




6,15 mm (0.242") THICKNESS
SOLID TOP

NEW

Ideal to equip conveyors with tight nose-over transfer of unstable and delicate products with small foot-print. Particularly suitable for the following applications:
- As a dynamic alternative to the dead transfer plate between two conveyors equipped with longer pitch belts that do not allow for direct transfer of tight products.
- Product handling within packaging machines.
- All other unstable and delicate small foot-print loose products handling applications.

- **Belt widths:** 76,2 mm (3") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 8000 N/m (548 lbs/ft) for e-F.A.S.T.™ material
- **Belt weight:** 5,36 kg/m² (1.10 lbs/ft²) for e-F.A.S.T.™ material

e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

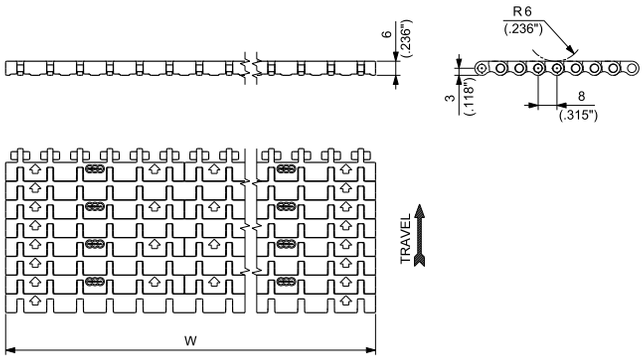

Materials see page 14

Sprockets see pages 164÷165

Applications see page 24

WIDTH W		MATERIAL
		Module
		e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMOPLASTIC
mm	inch	PART NUMBER
152,4	6	**8300EF006**
228,6	9	**8300EF009**
304,8	12	**8300EF012**
381,0	15	**8300EF015**
457,2	18	**8300EF018**
533,4	21	**8300EF021**
609,6	24	**8300EF024**
685,8	27	**8300EF027**
762,0	30	**8300EF030**
838,2	33	**8300EF033**
914,4	36	**8300EF036**
990,6	39	**8300EF039**

Belts wider than 990,6 mm (39") are available in 76,2 mm (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 42" wide belt (=39+3"), the PN for EF material is "8300EF042".


Standard packaging:
Belts are supplied in the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **8300**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE

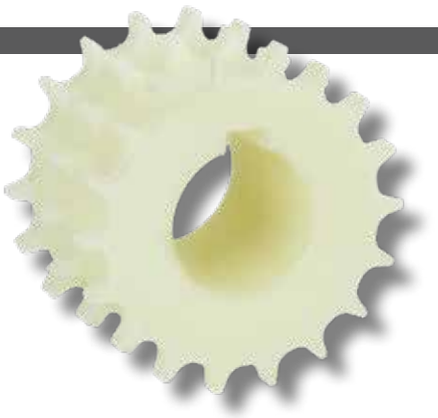

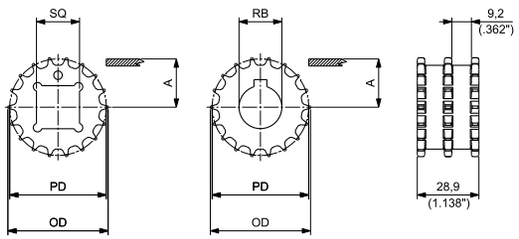

SQUARE BORE - DRIVE/IDLER ROUND BORE - DRIVE

MACHINED SOLID DRIVE SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ DRIVE/IDLER	PART NUMBER ROUND BORE RB DRIVE	WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**			Kg	lbs
18	46,07	1.814	47,00	1.850	20,04	0.789	20		**MPBAQ83001820**	**MPBAT83001820**	0,03	0.07
							25			**MPBAT83001825**	0,03	0.07
								¾	**MPBAQ830018190**	**MPBAT830018190**	0,03	0.07
								1		**MPBAT830018254**	0,03	0.07
24	61,29	2.413	62,30	2.453	27,65	1.088	20			**MPBAT83002420**	0,07	0.15
							25		**MPBAQ83002425**	**MPBAT83002425**	0,06	0.13
							30			**MPBAT83002430**	0,05	0.11
								1	**MPBAQ830024254**	**MPBAT830024254**	0,06	0.13
								1¼		**MPBAT830024317**	0,05	0.11


*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **8300**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

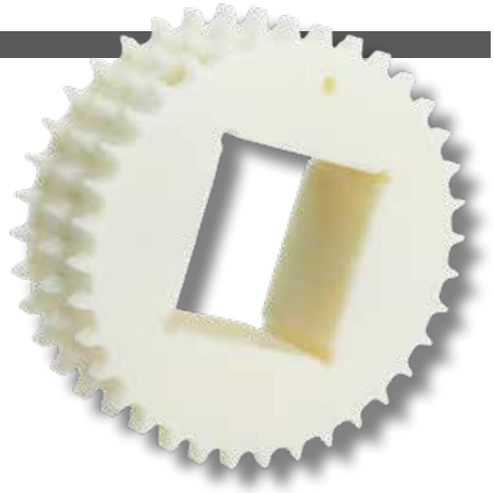

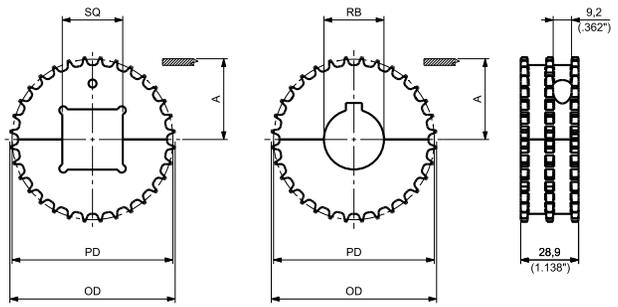

SQUARE BORE - DRIVE/IDLER ROUND BORE - DRIVE

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB	WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	Kg	lbs
32	81,59	3.212	82,60	3.252	37,80	1.488	25			**MPBAST83003225**	0,14	0.31
							30		**MPBASQ83003230**	**MPBAST83003230**	0,13	0.29
							35			**MPBAST83003235**	0,13	0.29
							40		**MPBASQ83003240**	**MPBAST83003240**	0,12	0.26
								1		**MPBAST830032254**	0,14	0.31
								1¼		**MPBAST830032317**	0,13	0.29
								1½	**MPBASQ830032381**	**MPBAST830032381**	0,12	0.26
36	91,79	3.614	92,70	3.650	42,99	1.692	25			**MPBAST83003625**	0,20	0.44
							30		**MPBASQ83003630**	**MPBAST83003630**	0,19	0.42
							35			**MPBAST83003635**	0,18	0.40
							40		**MPBASQ83003640**	**MPBAST83003640**	0,17	0.37
								1		**MPBAST830036254**	0,20	0.44
								1¼		**MPBAST830036317**	0,19	0.42
								1½	**MPBASQ830036381**	**MPBAST830036381**	0,18	0.40

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

½" Pitch Belts and Chains

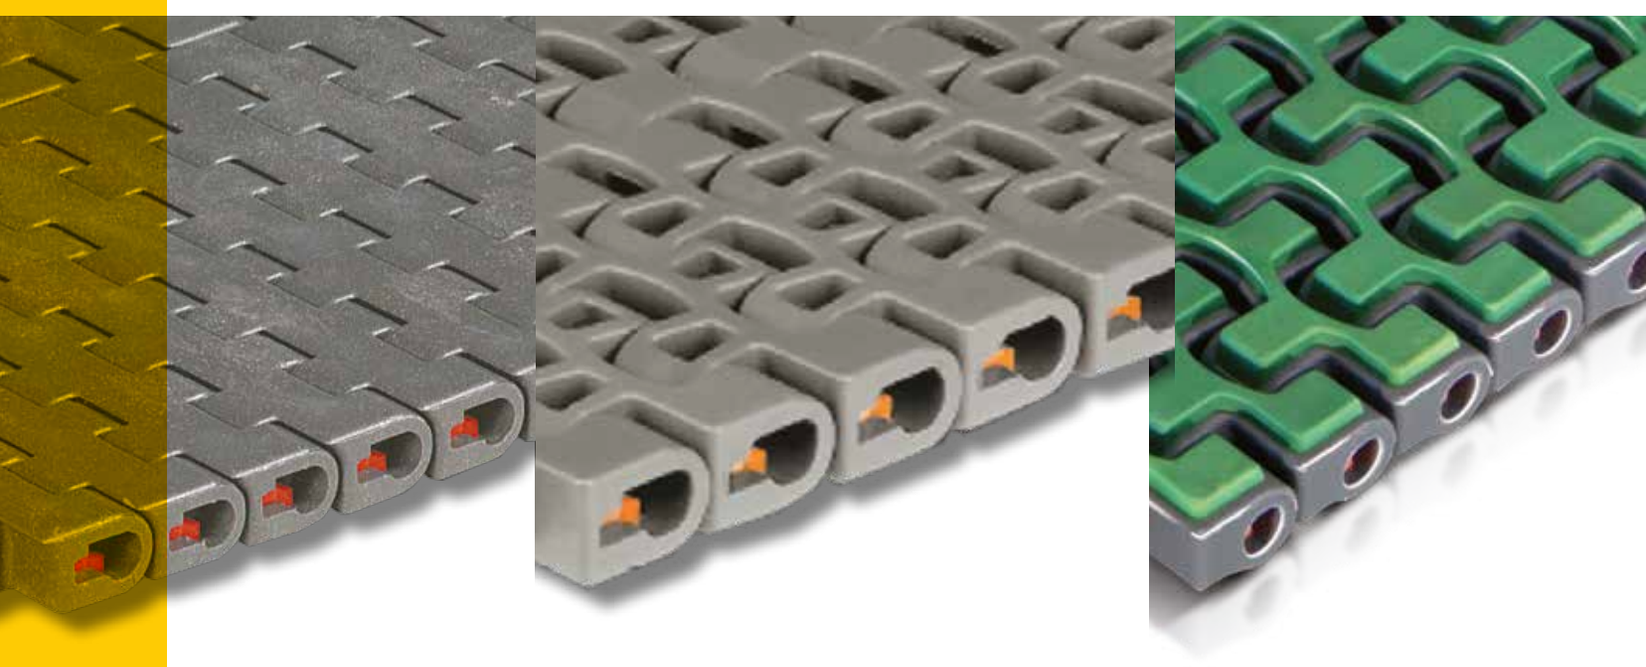

INDUSTRIES AND APPLICATIONS

Suitable for handling small and unstable products (loose or packaged) in a linear transfer from the head of one conveyor to the next one.

INDUSTRIES	APPLICATIONS
Bottling and canning	Depallettizer
Food filling	Mass conveyors
Container manufacturing	Accumulation tables
Pharmaceutical	Infeed packaging machines
Paper/cardboard	Packaged product convey
Consumer goods	Product handling within packaging machine (narrow chains)






REGINA SHORT PITCH (1/2") BELTS

REGINA offers the most complete range of 1/2" pitch belts available on the market, all with 8,7 mm thickness, having the following technical and geometrical features:

- Top surface: solid, rubberized and flush grid.
- Bottom surface: flat (available for metric stadard width only) or round.
- Width standard: metric (85 mm width increments) or imperial (3" width increments).
- Tracking guide: belts available with or without tracking guide, depending on the series.

The complete range of REGINA 1/2" pitch belts, together with their geometrical features and available materials is showed in the table below.

SERIES	TOP SURFACE	BOTTOM DESIGN	WIDTH STANDARD	TRACKING GUIDE VERSION		MODULE MATERIAL	RUBBER MATERIAL
				Without	With		
610	Solid	Round	Metric	Available	Available	NEW e-F.A.S.T. DK2 UP PP	
600	Solid	Flat	Metric	Available	Available	e-F.A.S.T. DK2 UP PP	
300	Solid	Round	Imperial	Available	Not available	e-F.A.S.T. DK2 UP PP	
500	Flush Grid	Flat	Metric	Available	Available	UP PP	
200	Flush Grid	Round	Imperial	Available	Not available	UP PP	
HF 510/HFS 510	Rubberized	Round	Metric	Available	Available	ULF PP	TPE TPE
HF 200	Rubberized	Round	Imperial	Available	Not available	ULF PP	TPE TPE
LBP 610	Rollers	Round	Metric	Available	Available	UP	

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

FEATURES


As a complement to its 1/2" pitch modular belts, REGINA proposes a complete range of nose-over transfer components, including static modular nose-over bars and an 8T sprocket, allowing for the following:

- Support products transfer from one conveyor to the next one
- Allow the belt to wrap around a small radius at the head of the conveyor, minimizing the deadplate width

NOSE-OVER TRANSFER

Exhibit 1 and Exhibit 2 display the minimum recommended center to center distance between head transfer components (nosebar or 8T sprockets), depending on the belt series.


EXHIBIT 1

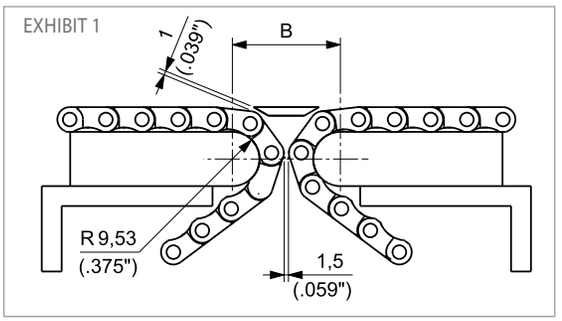

The minimum recommended chordal gap between belt and deadplate is 1 mm (0.039").

BELT SERIES	MINIMUM CENTER TO CENTER DISTANCE B	
	mm	inch
610, 300, 200	37,95	1.494
600, 500	40,76	1.604
HF 510, HFS 510, HF 200	41,95	1.652
LBP 610	57,37	2.258

EXHIBIT 2

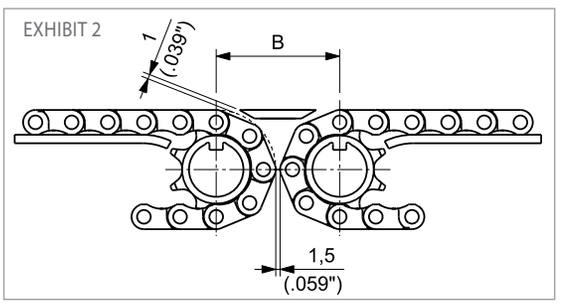

The minimum recommended chordal gap between belt and deadplate is 1 mm (0.039").


BELT SERIES	MINIMUM CENTER TO CENTER DISTANCE B	
	mm	inch
610, 300, 200	43,39	1.708
HF 510, HFS 510, HF 200	47,39	1.866
LBP 610	63,46	2.498

PRODUCT SELECTION


A critical aspect of choosing a REGINA solid top 1/2" pitch belt is to identify the best belt bottom contour suitable for the application (please refer to Exhibit 3). In particular:

- The round bottom design dramatically reduces the chordal effect when the belt engages with the nose-over bar
  - Such reduction is as high as 89%, from 1,4 mm of the flat-bottom to 0,15 mm of the round-bottom
- The flat bottom design guarantees a continuous contact between belt and wear strips
  - Such contact allows for less specific pressure than round bottom design

EXHIBIT 3 - COMPARISON BETWEEN REGINA SOLID TOP 1/2" PITCH FLAT BOTTOM AND ROUND BOTTOM BELTS DESIGN

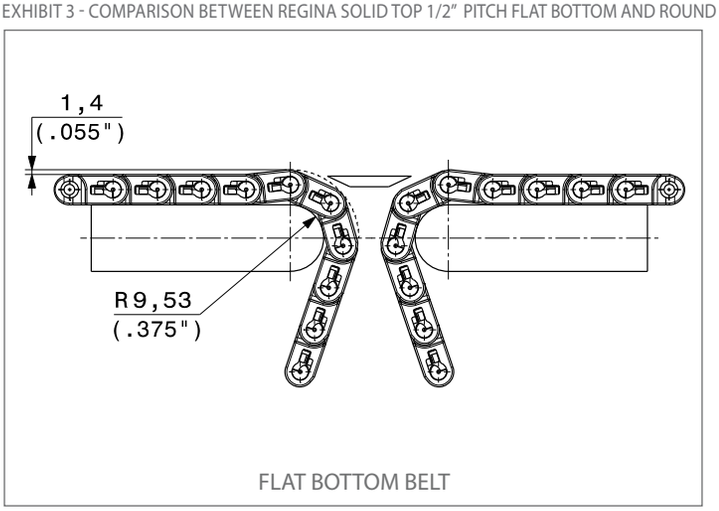

FLAT BOTTOM BELT

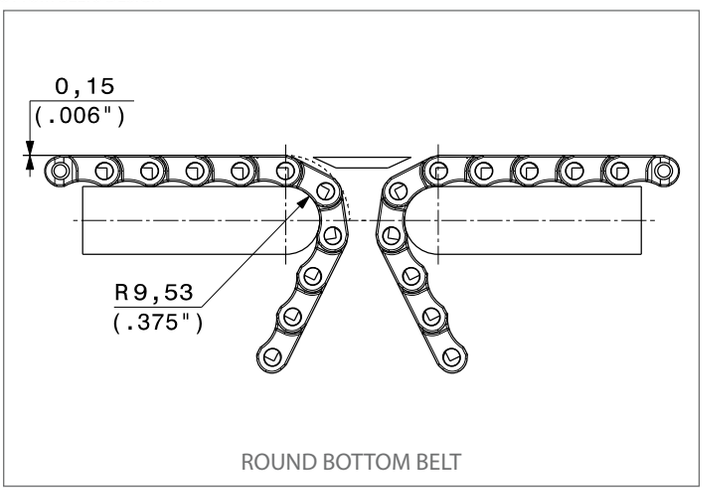


ROUND BOTTOM BELT

As a consequence:

- Round bottom surface design accomplishes greater product stability during end-to-end transfer.
- Flat bottom surface design minimizes belt wear.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
SOLID TOP

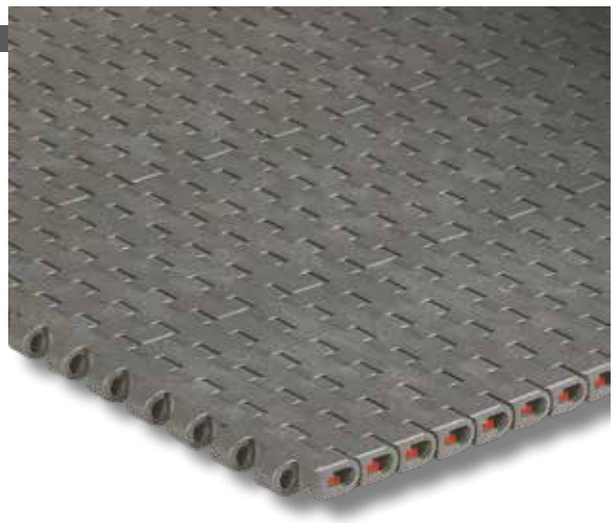


This belt offers a smooth and completely closed surface to provide excellent support and minimize product tipping.
Particularly suitable for conveyors where head transfer of products is required.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for UP and DK2™ materials
  10000 N/m (685 lbs/ft) for PP material
- **Belt weight:** 9,55 kg/m² (1.95 lbs/ft²) for UP and DK2™ materials
  6,46 kg/m² (1.32 lbs/ft²) for PP material

DK2™ DUPONT® KEVLAR® INSIDE

VERSION WITHOUT TRACKING GUIDE

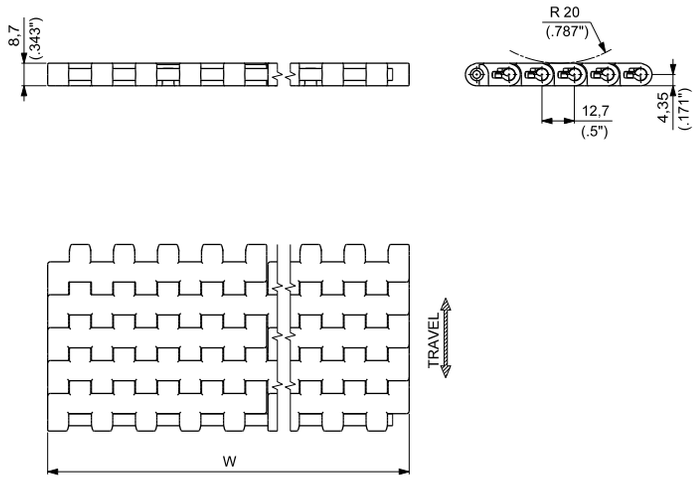

VERSION WITH TRACKING GUIDE

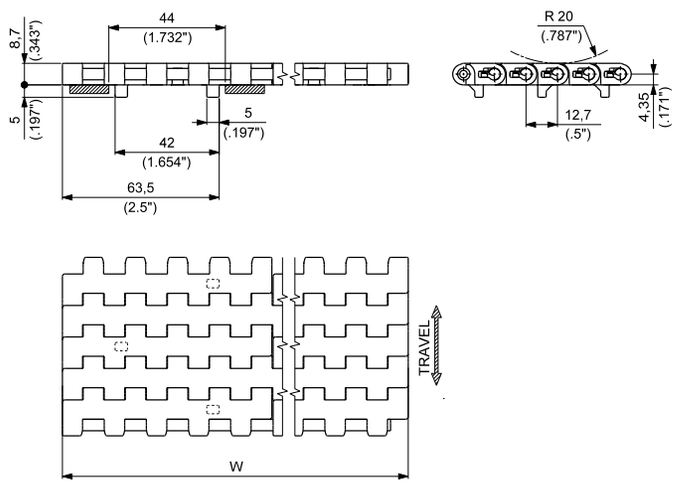

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14 | Nosebar see page 182 | Sprockets see pages 191÷195 | Applications see page 24


WIDTH W		MATERIALS						
		Module						Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®		PP SPECIAL POLYPROPYLENE[1]		
		PART NUMBER		PART NUMBER		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**600AUP0085**	**600AGUP0085**	**600AD2K0085**	**600AGD2K0085**	**600APP0085**	**600AGPP0085**	PBT
170	6.69	**600BUP0170**	**600BG1UP0170**	**600BD2K0170**	**600BG1D2K0170**	**600BPP0170**	**600BG1PP0170**	POLYPROPYLENE (PBT on request)
255	10.04	**600BUP0255**	**600BG1UP0255**	**600BD2K0255**	**600BG1D2K0255**	**600BPP0255**	**600BG1PP0255**	
340	13.39	**600BUP0340**	**600BG1UP0340**	**600BD2K0340**	**600BG1D2K0340**	**600BPP0340**	**600BG1PP0340**	
425	16.73	**600BUP0425**	**600BG1UP0425**	**600BD2K0425**	**600BG1D2K0425**	**600BPP0425**	**600BG1PP0425**	
510	20.08	**600BUP0510**	**600BG1UP0510**	**600BD2K0510**	**600BG1D2K0510**	**600BPP0510**	**600BG1PP0510**	
595	23.43	**600BUP0595**	**600BG1UP0595**	**600BD2K0595**	**600BG1D2K0595**	**600BPP0595**	**600BG1PP0595**	
680	26.77	**600BUP0680**	**600BG1UP0680**	**600BD2K0680**	**600BG1D2K0680**	**600BPP0680**	**600BG1PP0680**	
765	30.12	**600BUP0765**	**600BG1UP0765**	**600BD2K0765**	**600BG1D2K0765**	**600BPP0765**	**600BG1PP0765**	
850	33.46	**600BUP0850**	**600BG1UP0850**	**600BD2K0850**	**600BG1D2K0850**	**600BPP0850**	**600BG1PP0850**	
935	36.81	**600BUP0935**	**600BG1UP0935**	**600BD2K0935**	**600BG1D2K0935**	**600BPP0935**	**600BG1PP0935**	
1020	40.16	**600BUP1020**	**600BG1UP1020**	**600BD2K1020**	**600BG1D2K1020**	**600BPP1020**	**600BG1PP1020**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "600BUP1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

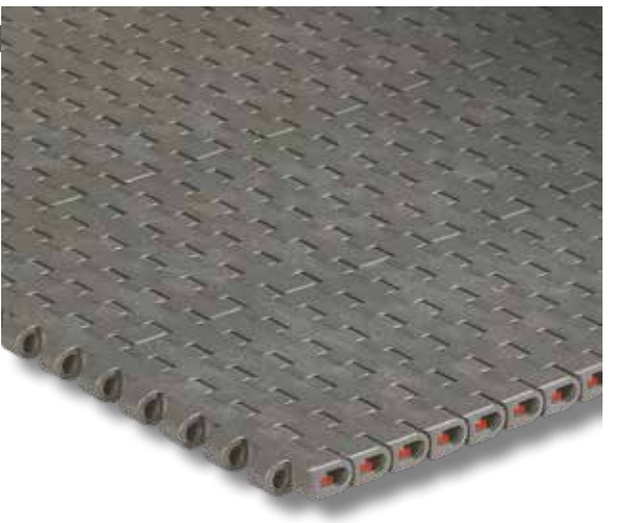


8,7 mm (0.343") THICKNESS
SOLID TOP

This belt offers a smooth and completely closed surface to provide excellent support and minimize product tipping.
Particularly suitable for conveyors where head transfer of products is required.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for e-F.A.S.T.™ material
- **Belt weight:** 9,55 kg/m² (1.95 lbs/ft²) for e-F.A.S.T.™ material

e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

VERSION WITHOUT TRACKING GUIDE

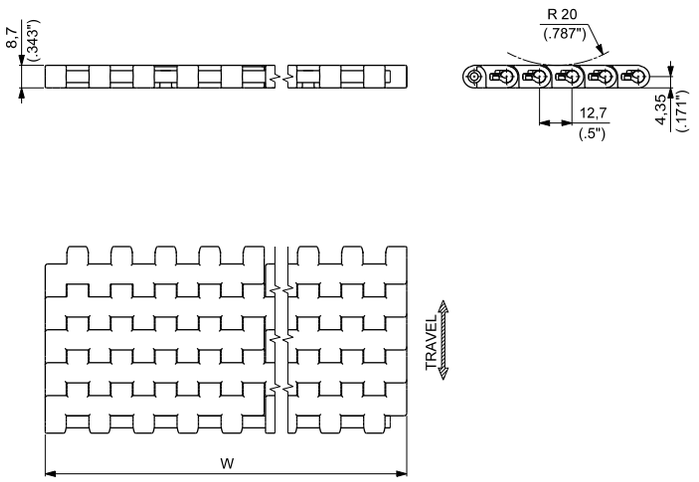

VERSION WITH TRACKING GUIDE

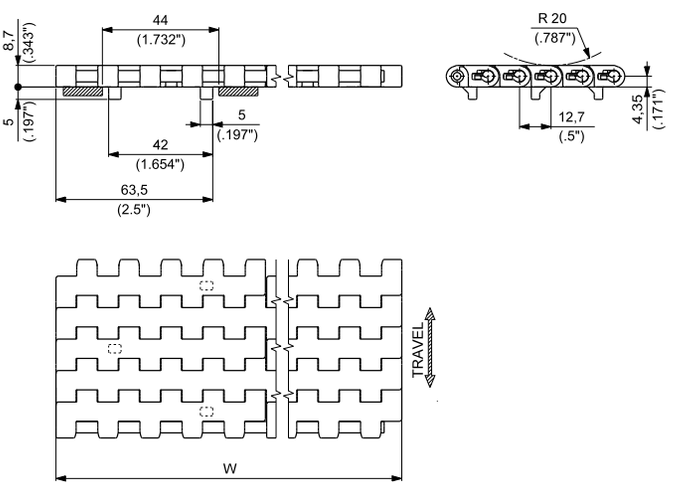

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24

WIDTH W		MATERIALS		
		NEW e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMOPLASTIC		Pin
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**600AEF0085**	**600AGEF0085**	PBT
170	6.69	**600AEF0170**	**600AG1EF0170**	
255	10.04	**600AEF0255**	**600AG1EF0255**	
340	13.39	**600AEF0340**	**600AG1EF0340**	
425	16.73	**600AEF0425**	**600AG1EF0425**	
510	20.08	**600AEF0510**	**600AG1EF0510**	
595	23.43	**600AEF0595**	**600AG1EF0595**	
680	26.77	**600AEF0680**	**600AG1EF0680**	
765	30.12	**600AEF0765**	**600AG1EF0765**	
850	33.46	**600AEF0850**	**600AG1EF0850**	
935	36.81	**600AEF0935**	**600AG1EF0935**	
1020	40.16	**600AEF1020**	**600AG1EF1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for EF material is "600AEF1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


ACTIVE TRANSFER MODULES
8,7 mm (0.343") THICKNESS
SOLID TOP





Active transfer modules 600G ATM series allow the transfer of the products between two 90° conveyor tracks without using dead plates.
Left and right version available.

DUPONT® KEVLAR® INSIDE

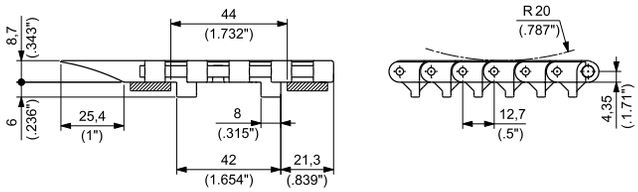



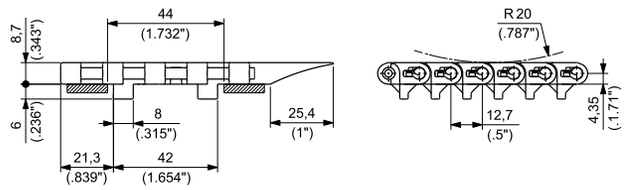



Materials see page 14
Sprockets see pages 191÷195
Applications see page 24

600G ATM - Left Version

MATERIALS Plate	MATERIALS Pin	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	POLYPROPYLENE	600BGATM UP 0085 SX	600BGATMUP085S	110	4.33	8,7	0.343	1190	268	0,96	0.64
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		600BGATM D2K 0085 SX	600BGATMD2K085S	110	4.33	8,7	0.343	1190	268	0,96	0.64

600G ATM - Right Version

MATERIALS Plate	MATERIALS Pin	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	POLYPROPYLENE	600BGATM UP 0085 DX	600BGATMUP085D	110	4.33	8,7	0.343	1190	268	0,96	0.64
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		600BGATM D2K 0085 DX	600BGATMD2K085D	110	4.33	8,7	0.343	1190	268	0,96	0.64

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




8,7 mm (0.343") THICKNESS
SOLID TOP

The belt offers a completely closed top surface design for an excellent product support without tipping. The round bottom surface combined to the reduced pitch (1/2") provides the minimum chordal effect for an optimum head transfer of products. Particularly suitable for conveyors where a head transfer of products is required.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for UP and DK2™ materials
  10000 N/m (685 lbs/ft) for PP material
- **Belt weight:** 9,55 kg/m² (1.96 lbs/ft²) for UP and DK2™ materials
  6,46 kg/m² (1.32 lbs/ft²) for PP material

DK2™ DUPONT® KEVLAR® INSIDE

VERSION WITHOUT TRACKING GUIDE

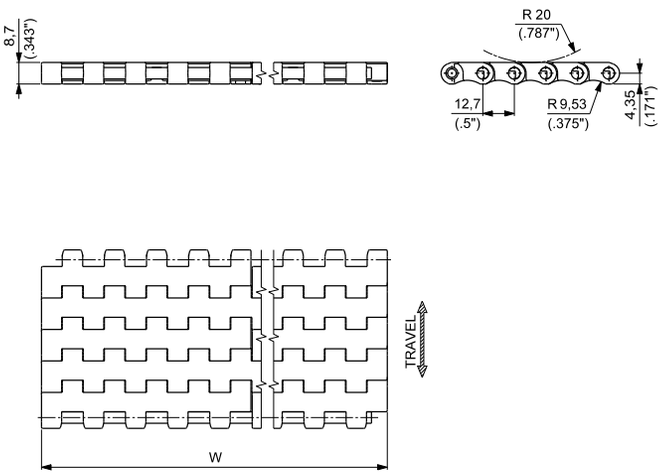

VERSION WITH TRACKING GUIDE

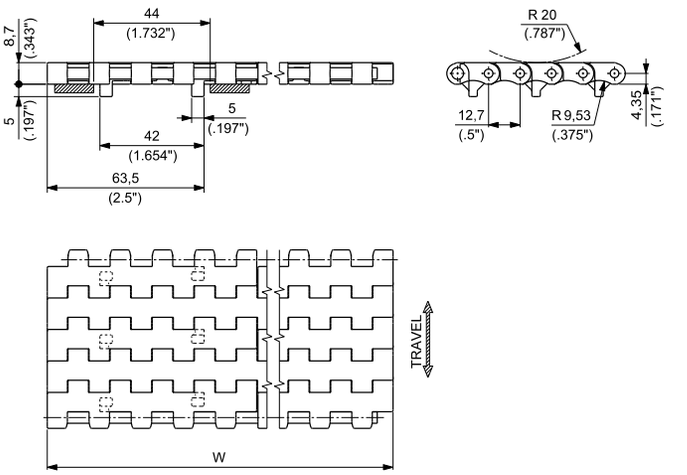

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24

WIDTH W		MATERIALS						
		Module						Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®		PP SPECIAL POLYPROPYLENE[1]		
		PART NUMBER		PART NUMBER		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**610AUP0085**	**610AGUP0085**	**610AD2K0085**	**610AGD2K0085**	**610APP0085**	**610AGPP0085**	PBT
170	6.69	**610BUP0170**	**610BG1UP0170**	**610BD2K0170**	**610BG1D2K0170**	**610BPP0170**	**610BG1PP0170**	
255	10.04	**610BUP0255**	**610BG1UP0255**	**610BD2K0255**	**610BG1D2K0255**	**610BPP0255**	**610BG1PP0255**	
340	13.39	**610BUP0340**	**610BG1UP0340**	**610BD2K0340**	**610BG1D2K0340**	**610BPP0340**	**610BG1PP0340**	
425	16.73	**610BUP0425**	**610BG1UP0425**	**610BD2K0425**	**610BG1D2K0425**	**610BPP0425**	**610BG1PP0425**	
510	20.08	**610BUP0510**	**610BG1UP0510**	**610BD2K0510**	**610BG1D2K0510**	**610BPP0510**	**610BG1PP0510**	
595	23.43	**610BUP0595**	**610BG1UP0595**	**610BD2K0595**	**610BG1D2K0595**	**610BPP0595**	**610BG1PP0595**	POLYPROPYLENE (PBT on request)
680	26.77	**610BUP0680**	**610BG1UP0680**	**610BD2K0680**	**610BG1D2K0680**	**610BPP0680**	**610BG1PP0680**	
765	30.12	**610BUP0765**	**610BG1UP0765**	**610BD2K0765**	**610BG1D2K0765**	**610BPP0765**	**610BG1PP0765**	
850	33.46	**610BUP0850**	**610BG1UP0850**	**610BD2K0850**	**610BG1D2K0850**	**610BPP0850**	**610BG1PP0850**	
935	36.81	**610BUP0935**	**610BG1UP0935**	**610BD2K0935**	**610BG1D2K0935**	**610BPP0935**	**610BG1PP0935**	
1020	40.16	**610BUP1020**	**610BG1UP1020**	**610BD2K1020**	**610BG1D2K1020**	**610BPP1020**	**610BG1PP1020**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "600BUP1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




8,7 mm (0.343") THICKNESS
SOLID TOP

The belt offers a completely closed top surface design for an excellent product support without tipping. The round bottom surface combined to the reduced pitch (1/2") provides the minimum chordal effect for an optimum head transfer of products. Particularly suitable for conveyors where a head transfer of products is required.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for e-F.A.S.T.™ material
- **Belt weight:** 9,55 kg/m² (1.95 lbs/ft²) for e-F.A.S.T.™ material

e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

VERSION WITHOUT TRACKING GUIDE

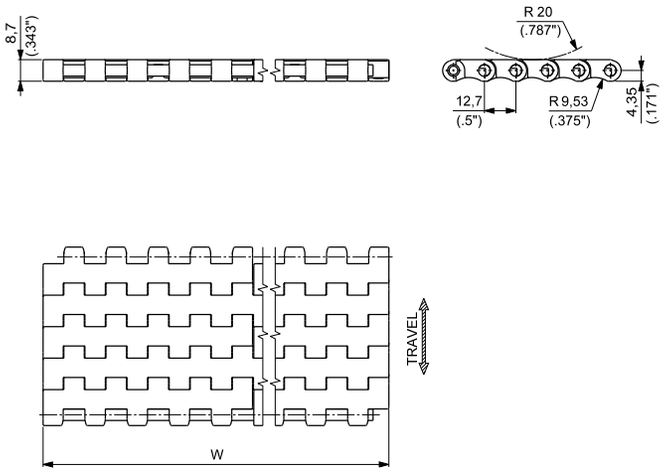

VERSION WITH TRACKING GUIDE

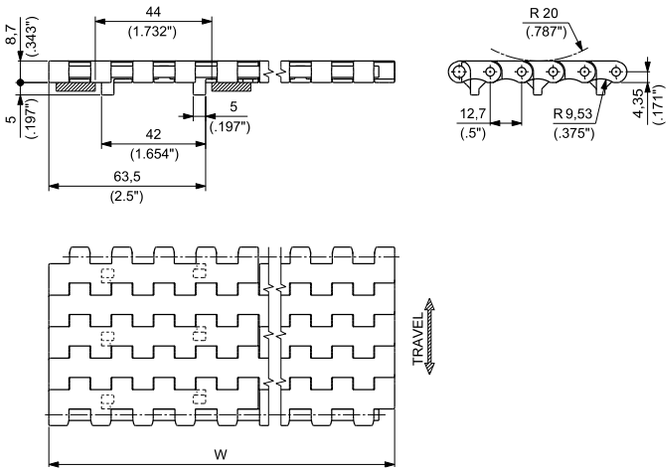

Materials see page 14 | Nosebar see page 182 | Sprockets see pages 191÷195 | Applications see page 24

WIDTH W		MATERIALS		
		NEW e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMOPLASTIC		Pin
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**610AEF0085**	**610AGEF0085**	PBT
170	6.69	**610AEF0170**	**610AG1EF0170**	
255	10.04	**610AEF0255**	**610AG1EF0255**	
340	13.39	**610AEF0340**	**610AG1EF0340**	
425	16.73	**610AEF0425**	**610AG1EF0425**	
510	20.08	**610AEF0510**	**610AG1EF0510**	
595	23.43	**610AEF0595**	**610AG1EF0595**	
680	26.77	**610AEF0680**	**610AG1EF0680**	
765	30.12	**610AEF0765**	**610AG1EF0765**	
850	33.46	**610AEF0850**	**610AG1EF0850**	
935	36.81	**610AEF0935**	**610AG1EF0935**	
1020	40.16	**610AEF1020**	**610AG1EF1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for EF material is "610AEF1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


8,7 mm (0.343") THICKNESS
FLUSH GRID




Excellent combination of support and open area (21%).
Optimum drainage of liquids and good support of the conveyed products.
Particularly suitable for conveyors where the head transfer of products is required.

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for UP material
  10000 N/m (685 lbs/ft) for PP material
- **Belt weight:** 7,06 kg/m² (1.45 lbs/ft²) for UP material
  4,76 kg/m² (0.97 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

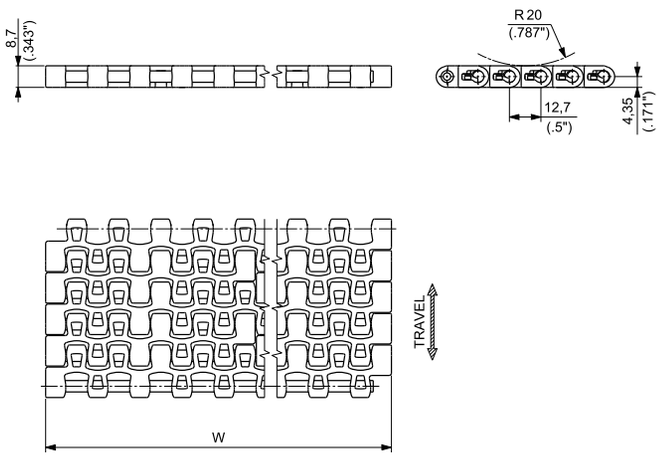

VERSION WITH TRACKING GUIDE

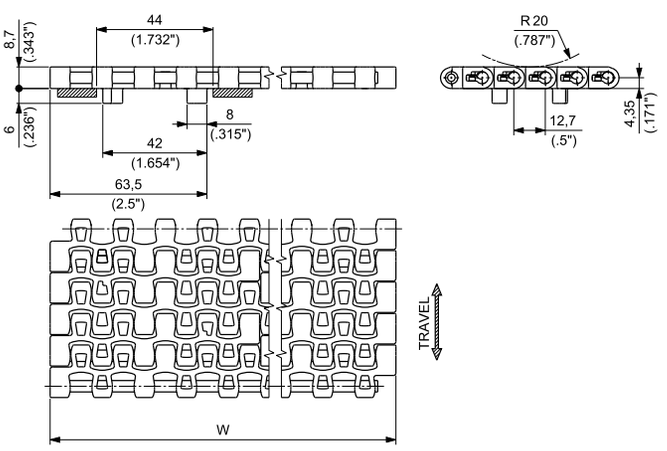

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24


WIDTH W		MATERIALS				
		Module				Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		PP SPECIAL POLYPROPYLENE[1]		
		PART NUMBER		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**500AUP0085**	**500AGUP0085**	**500APP0085**	**500AGPP0085**	PBT
170	6.69	**500BUP0170**	**500BG1UP0170**	**500BPP0170**	**500BG1PP0170**	POLYPROPYLENE (PBT on request)
255	10.04	**500BUP0255**	**500BG1UP0255**	**500BPP0255**	**500BG1PP0255**	
340	13.39	**500BUP0340**	**500BG1UP0340**	**500BPP0340**	**500BG1PP0340**	
425	16.73	**500BUP0425**	**500BG1UP0425**	**500BPP0425**	**500BG1PP0425**	
510	20.08	**500BUP0510**	**500BG1UP0510**	**500BPP0510**	**500BG1PP0510**	
595	23.43	**500BUP0595**	**500BG1UP0595**	**500BPP0595**	**500BG1PP0595**	
680	26.77	**500BUP0680**	**500BG1UP0680**	**500BPP0680**	**500BG1PP0680**	
765	30.12	**500BUP0765**	**500BG1UP0765**	**500BPP0765**	**500BG1PP0765**	
850	33.46	**500BUP0850**	**500BG1UP0850**	**500BPP0850**	**500BG1PP0850**	
935	36.81	**500BUP0935**	**500BG1UP0935**	**500BPP0935**	**500BG1PP0935**	
1020	40.16	**500BUP1020**	**500BG1UP1020**	**500BPP1020**	**500BG1PP1020**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "500BUP1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

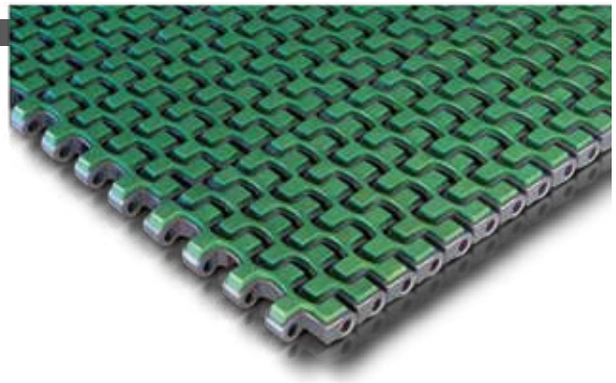


8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE - FULL COVER


Belt designed for handling packed containers like boxes, multi packs and cases in packaging lines. It is the optimal solution for high speed stop belts, metering belts, etc. The rubberized area is maximized, both in the transversal and longitudinal direction, reducing gaps between the rubber pads.

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 10000 N/m (695 lbs/ft) for ULF and PP materials
- **Belt weight:** 9,14 kg/m² (1.87 lbs/ft²) for ULF material
  7,47 kg/m² (1.53 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

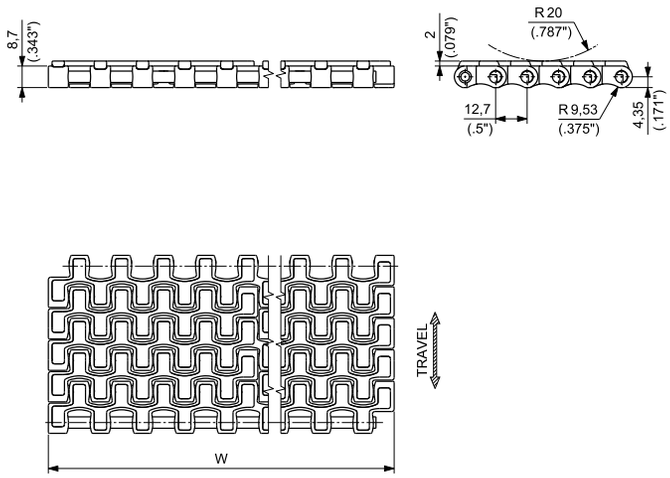

VERSION WITH TRACKING GUIDE

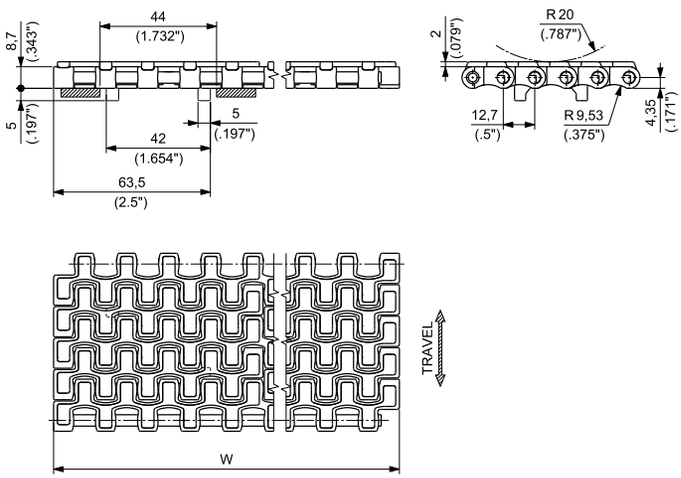

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14 | Nosebar see page 182 | Sprockets see pages 191÷195 | Applications see page 24

WIDTH W		MATERIALS					
		Module				Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN		PP SPECIAL POLYPROPYLENE(1)			
		PART NUMBER		PART NUMBER			
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE		
85	3.35	**HF510ULF0085**	**HF510GULF0085**	**HF510APP0085**	**HF510AGPP0085**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
170	6.69	**HF510ULF0170**	**HF510G1ULF0170**	**HF510APP0170**	**HF510AG1PP0170**		
255	10.04	**HF510ULF0255**	**HF510G1ULF0255**	**HF510APP0255**	**HF510AG1PP0255**		
340	13.39	**HF510ULF0340**	**HF510G1ULF0340**	**HF510APP0340**	**HF510AG1PP0340**		
425	16.73	**HF510ULF0425**	**HF510G1ULF0425**	**HF510APP0425**	**HF510AG1PP0425**		
510	20.08	**HF510ULF0510**	**HF510G1ULF0510**	**HF510APP0510**	**HF510AG1PP0510**		
595	23.43	**HF510ULF0595**	**HF510G1ULF0595**	**HF510APP0595**	**HF510AG1PP0595**		
680	26.77	**HF510ULF0680**	**HF510G1ULF0680**	**HF510APP0680**	**HF510AG1PP0680**		
765	30.12	**HF510ULF0765**	**HF510G1ULF0765**	**HF510APP0765**	**HF510AG1PP0765**		
850	33.46	**HF510ULF0850**	**HF510G1ULF0850**	**HF510APP0850**	**HF510AG1PP0850**		
935	36.81	**HF510ULF0935**	**HF510G1ULF0935**	**HF510APP0935**	**HF510AG1PP0935**		
1020	40.16	**HF510ULF1020**	**HF510G1ULF1020**	**HF510APP1020**	**HF510AG1PP1020**		


Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for ULF material is "HF510ULF1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE - SIDE INDENT


NEW

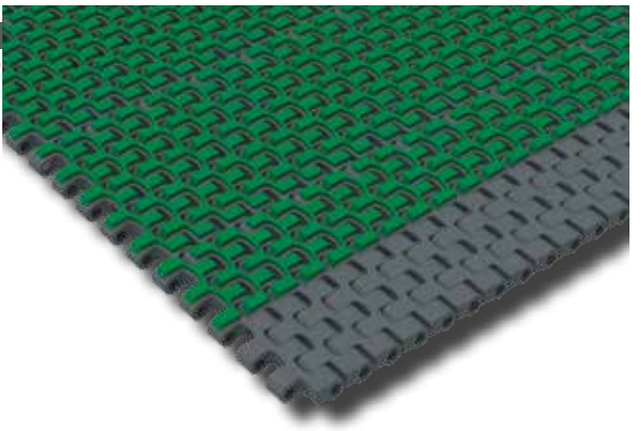


The belt is specifically designed for handling shrink wrapped packs, boxes, plastic trayes and other types of containers in incline, decline or timing applications.

- **Belt widths:** 255 mm (10.04") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 10000 N/m (685 lbs/ft) for ULF and PP materials
- **Belt weight:** 9,14 kg/m² (1.87 lbs/ft²) for ULF material
  7,47 kg/m² (1.53 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

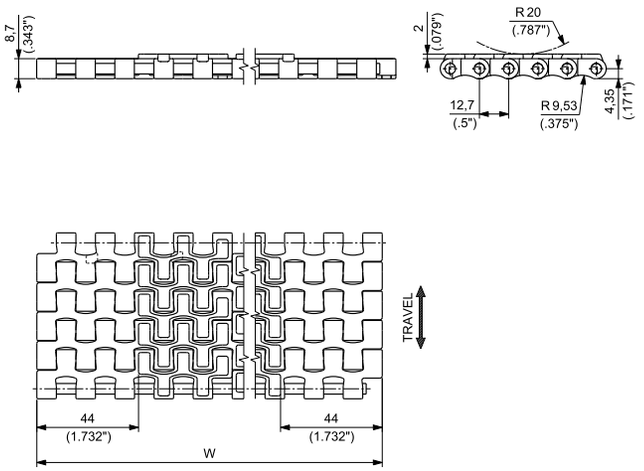

VERSION WITH TRACKING GUIDE

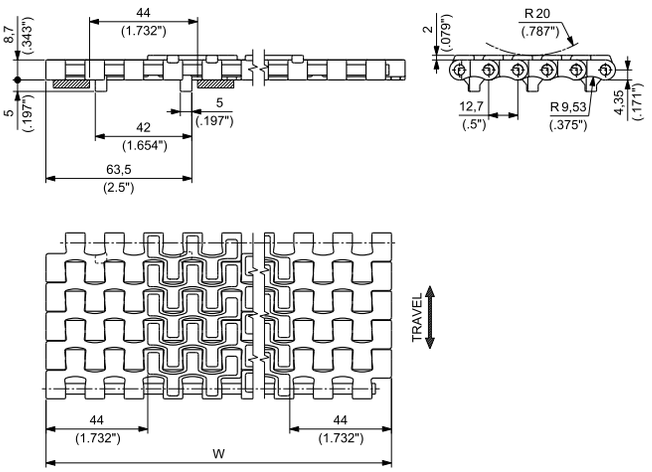

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24

WIDTH W		MATERIALS					
		Module				Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN		PP SPECIAL POLYPROPYLENE[1]			
		PART NUMBER		PART NUMBER			
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE		
255	10.04	**HFS510ULF0255**	**HFS510G1ULF0255**	**HFS510APP0255**	**HFS510AG1PP0255**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
340	13.39	**HFS510ULF0340**	**HFS510G1ULF0340**	**HFS510APP0340**	**HFS510AG1PP0340**		
425	16.73	**HFS510ULF0425**	**HFS510G1ULF0425**	**HFS510APP0425**	**HFS510AG1PP0425**		
510	20.08	**HFS510ULF0510**	**HFS510G1ULF0510**	**HFS510APP0510**	**HFS510AG1PP0510**		
595	23.43	**HFS510ULF0595**	**HFS510G1ULF0595**	**HFS510APP0595**	**HFS510AG1PP0595**		
680	26.77	**HFS510ULF0680**	**HFS510G1ULF0680**	**HFS510APP0680**	**HFS510AG1PP0680**		
765	30.12	**HFS510ULF0765**	**HFS510G1ULF0765**	**HFS510APP0765**	**HFS510AG1PP0765**		
850	33.46	**HFS510ULF0850**	**HFS510G1ULF0850**	**HFS510APP0850**	**HFS510AG1PP0850**		
935	36.81	**HFS510ULF0935**	**HFS510G1ULF0935**	**HFS510APP0935**	**HFS510AG1PP0935**		
1020	40.16	**HFS510ULF1020**	**HFS510G1ULF1020**	**HFS510APP1020**	**HFS510AG1PP1020**		

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for ULF material is "HFS510ULF1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied in the lenght requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




8,7 mm (0.343") THICKNESS
LBP ROLLERS


Designed for accumulating applications where efficient nose-over transfer is required.
The round bottom surface, combined with the ½" pitch, provides the mimimum chordal effect minimizing dead plates.

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 27000 N/m (1,850 lbs/ft)
- **Belt weight:** 18,3 kg/m² (3.75 lbs/ft²)

VERSION WITHOUT TRACKING GUIDE

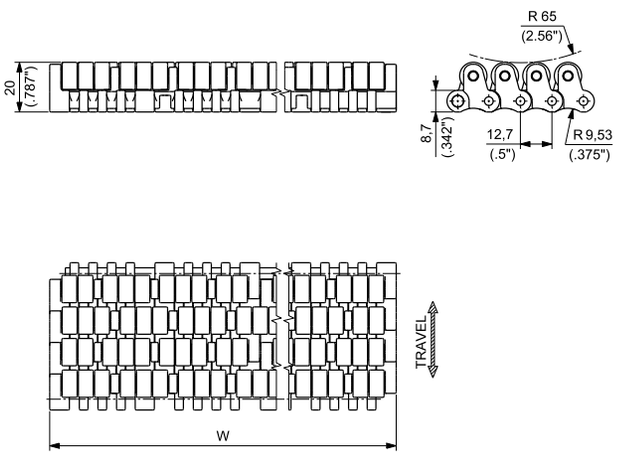

VERSION WITH TRACKING GUIDE

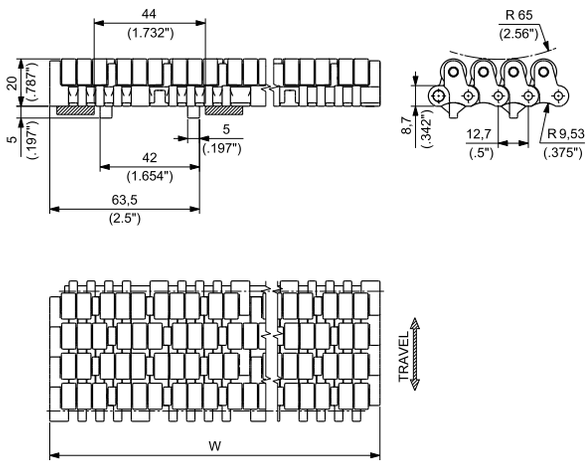

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Modular transfer plates see pages 353÷354
Applications see page 24

WIDTH W		MATERIALS		
		Module and Roller		Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**LBP610AUP0085**	**LBP610AGUP0085**	PBT
170	6.69	**LBP610AUP0170**	**LBP610AG1UP0170**	
255	10.04	**LBP610AUP0255**	**LBP610AG1UP0255**	
340	13.39	**LBP610AUP0340**	**LBP610AG1UP0340**	
425	16.73	**LBP610AUP0425**	**LBP610AG1UP0425**	
510	20.08	**LBP610AUP0510**	**LBP610AG1UP0510**	
595	23.43	**LBP610AUP0595**	**LBP610AG1UP0595**	
680	26.77	**LBP610AUP0680**	**LBP610AG1UP0680**	
765	30.12	**LBP610AUP0765**	**LBP610AG1UP0765**	
850	33.46	**LBP610AUP0850**	**LBP610AG1UP0850**	
935	36.81	**LBP610AUP0935**	**LBP610AG1UP0935**	
1020	40.16	**LBP610AUP1020**	**LBP610AG1UP1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN is "LBP610AUP1105".

Standard packaging:
Belt widths ≤ 680 mm (26.77") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 765 mm (30.12") and ≤ 1020 mm (40.16") are supplied in rolls of 1,016 m (3.33 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied in the lenght requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved



8,7 mm (0.343") THICKNESS
SOLID TOP


The belt offers a completely closed top surface design for an excellent product support without tipping. The round bottom surface combined with the reduced pitch (½") transfer of products.provides the minimal chordal effect for an optimum head transfer of products.


- **Belt widths:** 114,3 mm (4 ½"), 76,2 mm (3") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for UP, DK2™ and e-F.A.S.T.™ materials
  10000 N/m (685 lbs/ft) for PP materials
- **Belt weight:** 9,52 kg/m² (1.95 lbs/ft²) for UP, DK2™ and e-F.A.S.T.™ materials
  6,55 kg/m² (1.34 lbs/ft²) for PP material

DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC





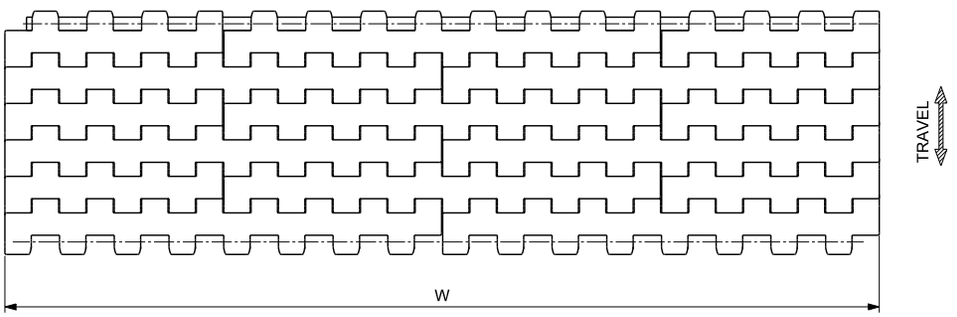

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24

WIDTH W		MATERIALS				
		Module				Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN®	DK2™ SPECIAL DELRIN® REINFORCED WITH KEVLAR®	PP SPECIAL POLYPROPYLENE[1]	e-F.A.S.T.™ NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC	
mm	inch	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	
114,3	4.5	**300AUPKG/000**	**300AD2KKG/000**	**300APPKG/000**	**300AEFKG/000**	PBT
76,2	3	**300BUP003**	**300BD2K003**	**300BPP003**	**300AEF003**	PBT for e-F.A.S.T. material POLYPROPYLENE for all other materials (PBT on request for all other materials)
152,4	6	**300BUP006**	**300BD2K006**	**300BPP006**	**300AEF006**	
228,6	9	**300BUP009**	**300BD2K009**	**300BPP009**	**300AEF009**	
304,8	12	**300BUP012**	**300BD2K012**	**300BPP012**	**300AEF012**	
381,0	15	**300BUP015**	**300BD2K015**	**300BPP015**	**300AEF015**	
457,2	18	**300BUP018**	**300BD2K018**	**300BPP018**	**300AEF018**	
533,4	21	**300BUP021**	**300BD2K021**	**300BPP021**	**300AEF021**	
609,6	24	**300BUP024**	**300BD2K024**	**300BPP024**	**300AEF024**	
685,8	27	**300BUP027**	**300BD2K027**	**300BPP027**	**300AEF027**	
762,0	30	**300BUP030**	**300BD2K030**	**300BPP030**	**300AEF030**	
838,2	33	**300BUP033**	**300BD2K033**	**300BPP033**	**300AEF033**	
914,4	36	**300BUP036**	**300BD2K036**	**300BPP036**	**300AEF036**	
990,6	39	**300BUP039**	**300BD2K039**	**300BPP039**	**300AEF039**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 990,6 mm (39") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 42" wide belt (=39+3 inches), the PN for UP material is "300BUP042".

Standard packaging:
114,3 mm (4.5") wide belt is supplied in rolls of 3,048 m (10ft) each.
Other belt widths are supplied in the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


ACTIVE TRANSFER MODULES
8,7 mm (0.343") THICKNESS
SOLID TOP





Active transfer modules 300G ATM series allow the transfer of the products between two 90° conveyor tracks without using dead plates.
Left and right version in available.

DUPONT® KEVLAR® INSIDE

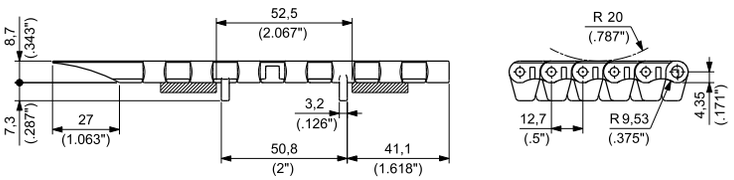

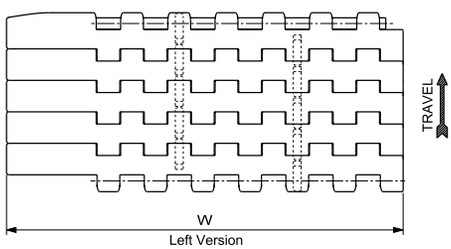

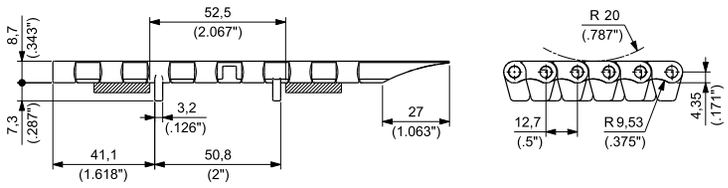

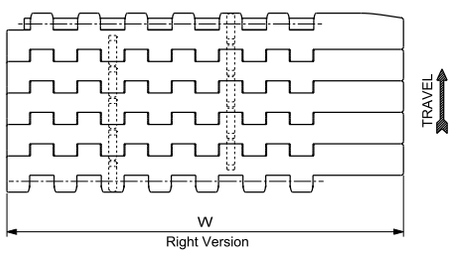

Materials see page 14
Sprockets see pages 191÷195
Applications see page 24

300G ATM - Left Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	300AGATM UP 450 LH	300AGATMUP450LH	160	6.30	8,7	0.343	1190	268	1,42	0.95
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKF™		300AGATM D2K 450 LH	300AGATMD2K450LH	160	6.30	8,7	0.343	1190	268	1,42	0.95

300G ATM - Right Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	300AGATM UP 450 RH	300AGATMUP450RH	160	6.30	8,7	0.343	1190	268	1,42	0.95
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKF™		300AGATM D2K 450 RH	300AGATMD2K450RH	160	6.30	8,7	0.343	1190	268	1,42	0.95

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved





8,7 mm (0.343") THICKNESS
FLUSH GRID

The belt offers an excellent combination of support and open area for optimal liquid and air flow-through where frequent cleaning is required.

- **Belt widths:** 76,2 mm (3") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (960 lbs/ft) for UP material
  10000 N/m (685 lbs/ft) for PP material
- **Belt weight:** 7,60 kg/m² (1.56 lbs/ft²) for UP material
  5,44 kg/m² (1.11 lbs/ft²) for PP material





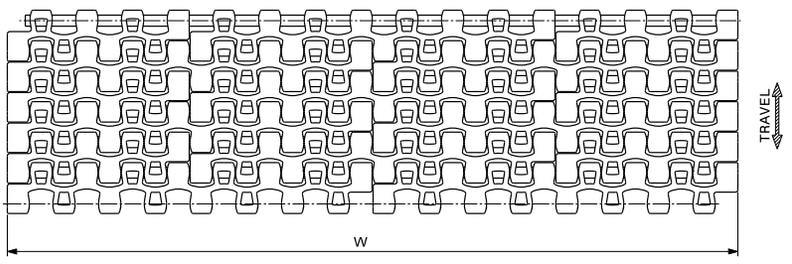

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24


WIDTH W		MATERIALS		
		Module		Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN®	PP SPECIAL POLYPROPYLENE[1]	
		PART NUMBER	PART NUMBER	
76,2	3	**200BUP003**	**200BPP003**	POLYPROPYLENE (PBT on request)
152,4	6	**200BUP006**	**200BPP006**	
228,6	9	**200BUP009**	**200BPP009**	
304,8	12	**200BUP012**	**200BPP012**	
381,0	15	**200BUP015**	**200BPP015**	
457,2	18	**200BUP018**	**200BPP018**	
533,4	21	**200BUP021**	**200BPP021**	
609,6	24	**200BUP024**	**200BPP024**	
685,8	27	**200BUP027**	**200BPP027**	
762,0	30	**200BUP030**	**200BPP030**	
838,2	33	**200BUP033**	**200BPP033**	
914,4	36	**200BUP036**	**200BPP036**	
990,6	39	**200BUP039**	**200BPP039**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 990,6 mm (39") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 42" wide belt (=39+3 inches), the PN for UP material is "200BUP042".

Standard packaging:
Belts are supplied in the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

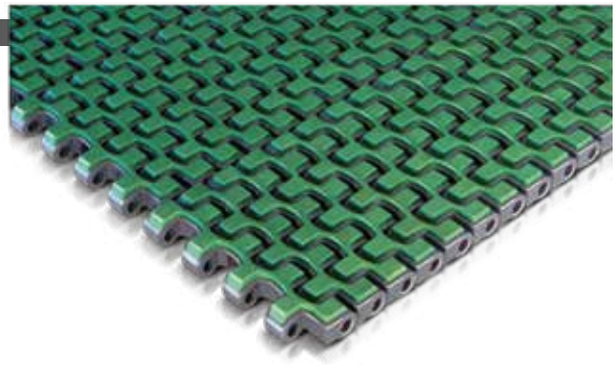

8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE

Belt designed for handling packed containers like boxes, multi packs and cases in packaging lines. It is the optimal solution for high speed stop belts, metering belts, etc. The rubberized area is maximized, both in transversal and longitudinal direction, reducing gaps between the rubber pads.

- **Belt widths:** 76,2 mm (3") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 10000 N/m (685 lbs/ft) for ULF and PP material
- **Belt weight:** 8,86 kg/m² (1.81 lbs/ft²) for ULF material
  7,32 kg/m² (1.50 lbs/ft²) for PP material

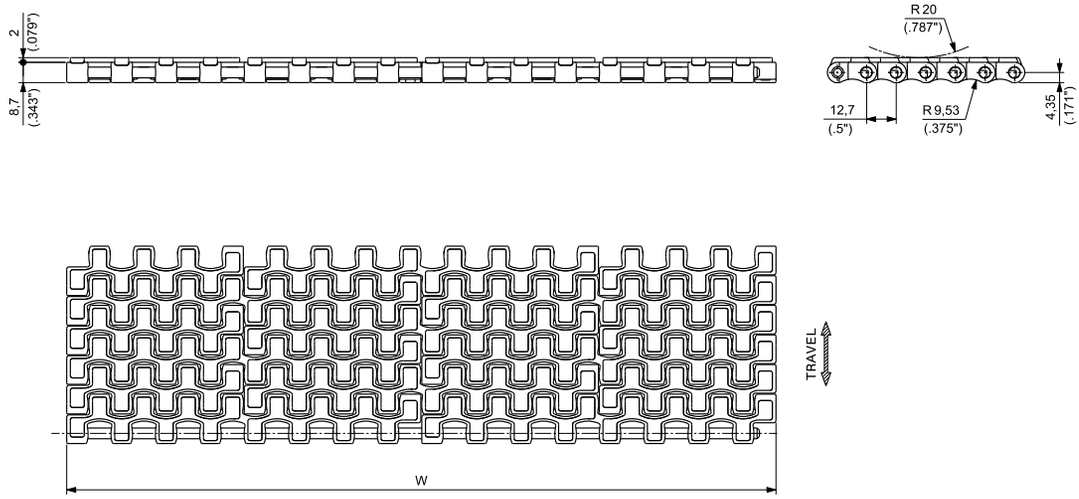

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷195
Applications see page 24

WIDTH W		MATERIALS			
		Module		Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN	PP SPECIAL POLYPROPYLENE(1)		
		PART NUMBER	PART NUMBER		
76,2	3	**HF200ULF003**	**HF200APP003**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
152,4	6	**HF200ULF006**	**HF200APP006**		
228,6	9	**HF200ULF009**	**HF200APP009**		
304,8	12	**HF200ULF012**	**HF200APP012**		
381,0	15	**HF200ULF015**	**HF200APP015**		
457,2	18	**HF200ULF018**	**HF200APP018**		
533,4	21	**HF200ULF021**	**HF200APP021**		
609,6	24	**HF200ULF024**	**HF200APP024**		
685,8	27	**HF200ULF027**	**HF200APP027**		
762,0	30	**HF200ULF030**	**HF200APP030**		
838,2	33	**HF200ULF033**	**HF200APP033**		
914,4	36	**HF200ULF036**	**HF200APP036**		
990,6	39	**HF200ULF039**	**HF200APP039**		

(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 990,6 mm (39") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 42" wide belt (=39+3 inches), the PN for ULF material is "HF200ULF042".

Standard packaging:
Belts are supplied in the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




DYNAMIC NOSEBAR FOR END-TO-END TRANSFER


The Regina dynamic nose bar provides successful end-to-end transfers at high speed, while reducing wear on both bar and belt.
The integrated dynamic steel rollers equipped with bearings minimize heat development and reduce the force required to pull the belt around the bar.
The modular design allows for side by side installation of multiple bars to fit metric (85mm width increments) standard conveyors.
The Regina dynamic nose bars is designed to work in combination with Regina ½" pitch belts.
The nosebar is fittable to the conveyor structure with M8 flat head screws (NOT INCLUDED).


MATERIALS	
PLATE:	UHMWPE with lubricant
ROLLERS:	SS Stainless Steel

WIDTHS W: 85 MM





WIDTHS W: 170 MM

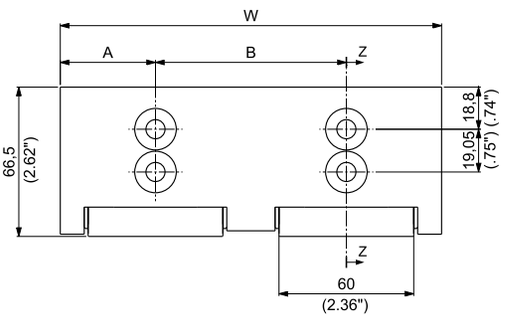




WIDTHS W: 255 MM

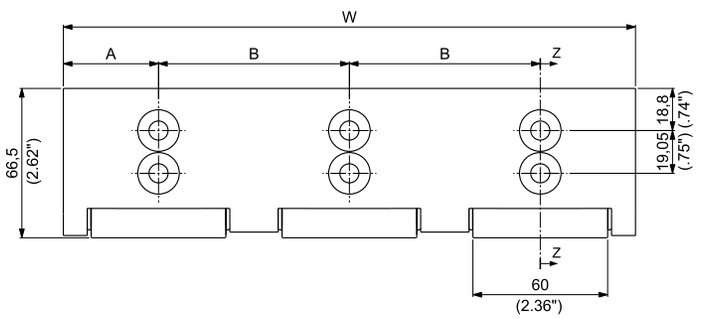



PART NUMBER	WIDTH W		A		B		WEIGHT		STANDARD PACKAGING	FOR BELTS SERIES
	mm	inch	mm	inch	mm	inch	kg	lbs		
CC000220	85,0	3.35	42,5	1.67	-	-	0,17	0.22	10 pcs	600 / 610 LBP 610 500 HF 510 HFS 510
CC000221	170,0	6.69	42,5	1.67	85,0	3.35	0,33	0.73	6 pcs	
CC000222	255,0	10.04	42,5	1.67	85,0	3.35	0,50	1.10	3 pcs	

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

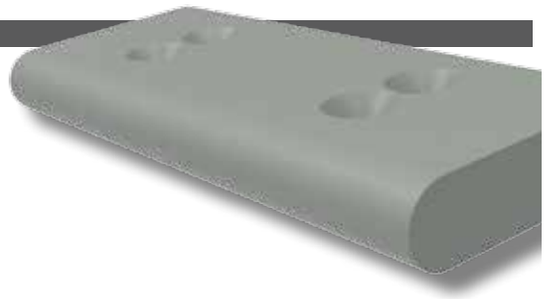


STATIC NOSEBAR FOR END-TO-END TRANSFER

The nosebar is supplied in a machined modular design having an edge curved contour with a radius that fits exactly the ½" pitch belts. The design, combined with UHMWPE material improved with self-lubricating additives, ensures decreased wear of belt and nosebar and consistant low friction. The nosebar is fittable to the conveyor structure with M8 flat head screws (NOT INCLUDED).


MATERIALS

NOSEBAR: **SUPREME-L** Self-lubricating UHMWPE


WIDTHS W: 3", 85 mm




WIDTHS W: 6", 170 mm

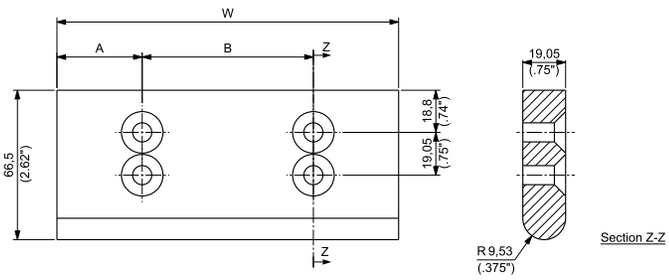


WIDTHS W: 9", 255 mm

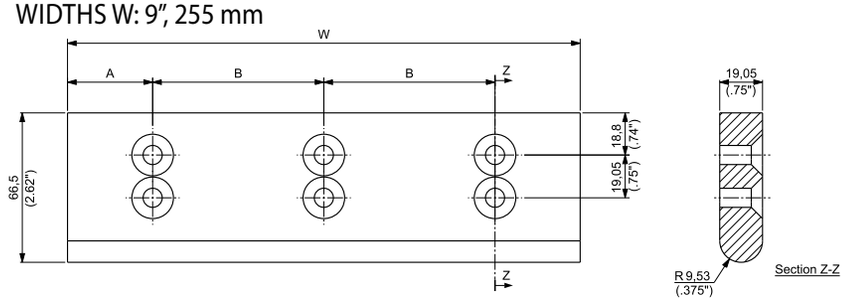

WIDTHS W: 12", 340 mm

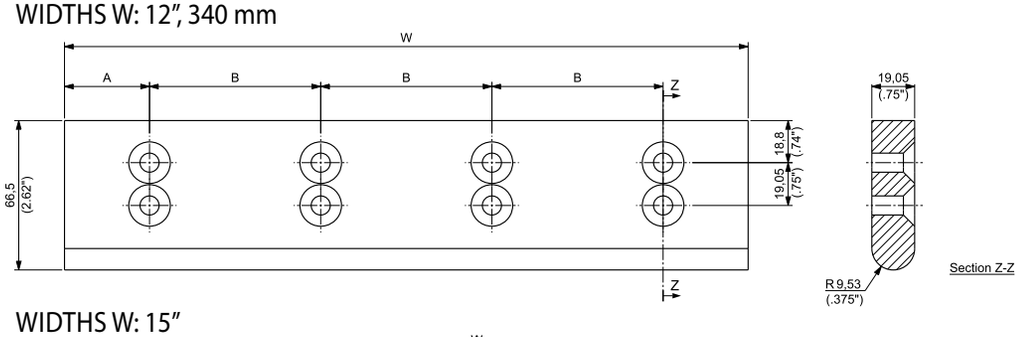

WIDTHS W: 15"

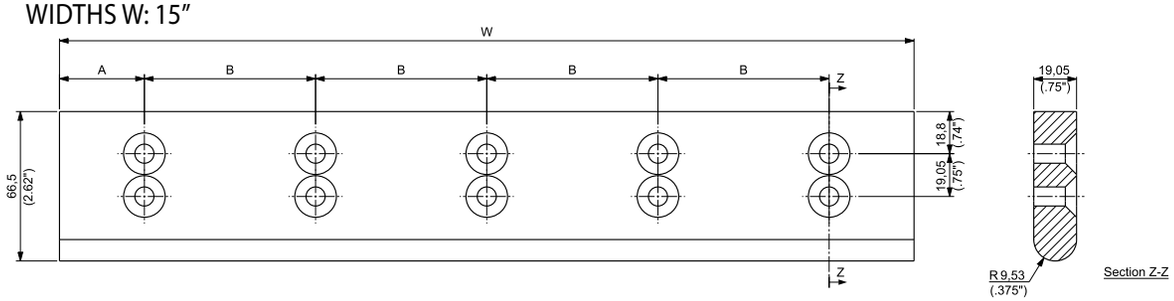

Materials see page 16

PART NUMBER	WIDTH W		A		B		WEIGHT		FOR BELTS SERIES
	mm	inch	mm	inch	mm	inch	kg	lbs	
CC000206	85,0	3.35	42,5	1.67	-	-	0,10	0.22	610 / 600
CC000207	170,0	6.69	42,5	1.67	85,0	3.35	0,19	0.42	LBP 610
CC000208	255,0	10.04	42,5	1.67	85,0	3.35	0,29	0.63	500
CC000209	340,0	13.39	42,5	1.67	85,0	3.35	0,38	0.84	HF 510 / HFS 510
CC000201	76,2	3.00	38,1	1.50	-	-	0,09	0.19	
CC000202	152,4	6.00	38,1	1.50	76,2	3.00	0,17	0.37	300
CC000203	228,6	9.00	38,1	1.50	76,2	3.00	0,26	0.56	200
CC000204	304,8	12.00	38,1	1.50	76,2	3.00	0,34	0.75	HF 200
CC000205	381,0	15.00	38,1	1.50	76,2	3.00	0,43	0.94	

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

INDUSTRIES AND APPLICATIONS

611 and RR 611 series comprise conveyor chains dedicated to the product dynamic dividing area of packaging machines. In this area, individual containers (made of plastic, metal or glass) are conveyed to the pack formation area, where the containers are clustered in the required format by dividing bars, electronically synchronized with the conveyor chains.

INDUSTRIES

Bottling and canning


Food filling

Container manufacturing

Pharmaceutical

Paper/cardboard

Consumer goods

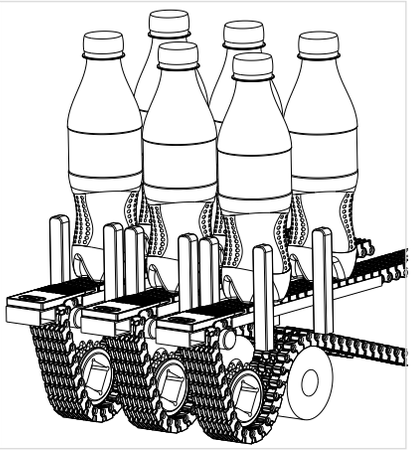

FEATURES



- 1/2" pitch combined with curved bottom contour provides chordal effect minimization, down to 0,15 mm with a 3/4" diameter nosebar, maximizing product stability during travel and head transfer.



- Raised rib surface with special "Z" design (RR611 series) allows the best support for the most unstable products like PET bottles with petaloid bottom.

- Clipless assembly of the modules, easing chain installation on the machines with no risk of pin disassembly in application.



- The most complete range of 1/2" pitch narrow chains available on the market, with widths that range from 29 mm to 76,2 mm, that makes possible conveying all type of containers.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
SOLID TOP


½" pitch chain, combined with curved bottom contour provides chordal effect minimization, down to 0,15 mm with a ¾" diameter nosebar, with the maximization of product stability during travel and head transfer.



VERSION WITHOUT TRACKING GUIDE

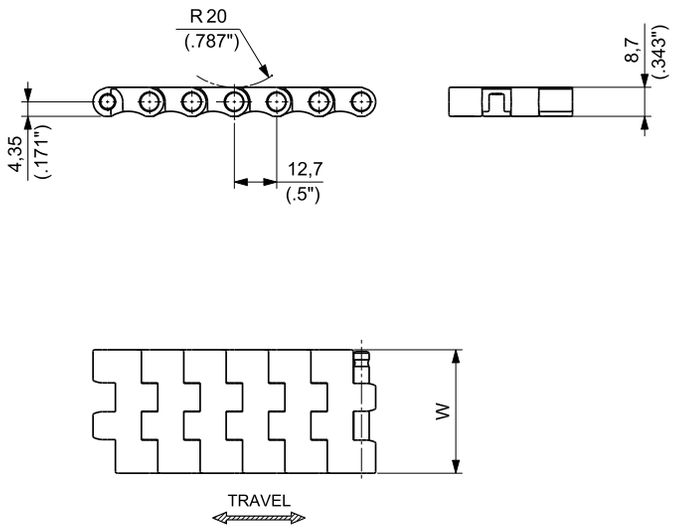

VERSION WITH TRACKING GUIDE

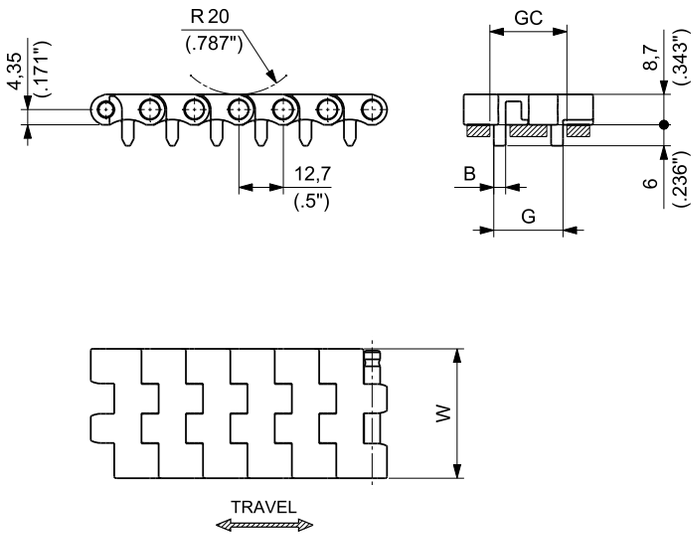

Materials see page 14
Sprockets see pages 190÷194
Applications see page 24

MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		GUIDE TRACK GC		INTERNAL GUIDE G		TRACKING GUIDE THICKNESS B		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	PBT	WITHOUT TRACKING GUIDE	611A UP K 34	**611AUPKAA/000**	34	1.34	-	-	-	-	-	-	570	128	0,32	0.22
			611A UP K 37	**611AUPKAD/000**	37	1.46	-	-	-	-	-	-	570	128	0,35	0.24
			611A UP K 51	**611AUPKB/000**	51	2.01	-	-	-	-	-	-	570	128	0,49	0.33
			611A UP K 76	**611AUPKDA/000**	76	2.99	-	-	-	-	-	-	1.067	240	0,75	0.50
		WITH TRACKING GUIDE	611AG UP K 29	**611AGUPKWB/000**	29	1.14	21,8	0.86	19,8	0.79	3,40	0.134	570	128	0,29	0.19
			611AG UP K 34	**611AGUPKAA/000**	34	1.34	21,8	0.86	19,8	0.79	3,40	0.630	570	128	0,34	0.23
			611AG UP K 37	**611AGUPKAD/000**	37	1.46	21,8	0.86	19,8	0.79	3,40	0.630	570	128	0,37	0.25
			611AG UP K 51	**611AGUPKB/000**	51	2.01	37,8	1.49	35,8	1.41	5,00	0.926	570	128	0,52	0.35
			611AG UP K 76	**611AGUPKDA/000**	76	2.99	45,0	1.78	43,0	1.69	5,25	0.207	1.067	240	0,77	0.52

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
RAISED RIB


Raised rib surface with special "Z" design guarantees the best support for the most unstable products like PET bottles with petaloid base.



VERSION WITHOUT TRACKING GUIDE

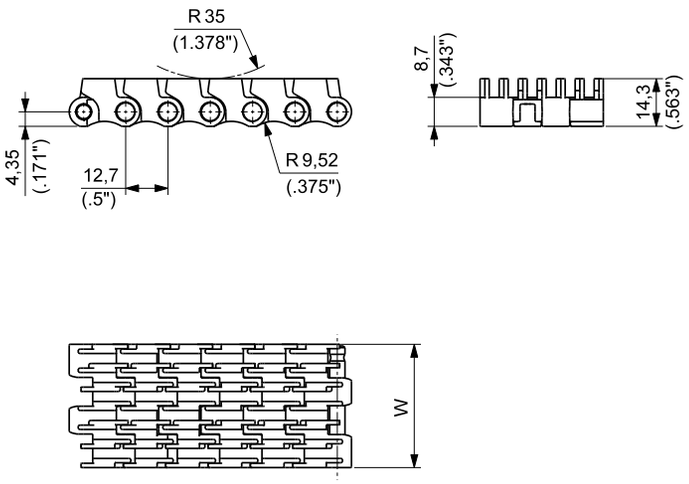

VERSION WITH TRACKING GUIDE

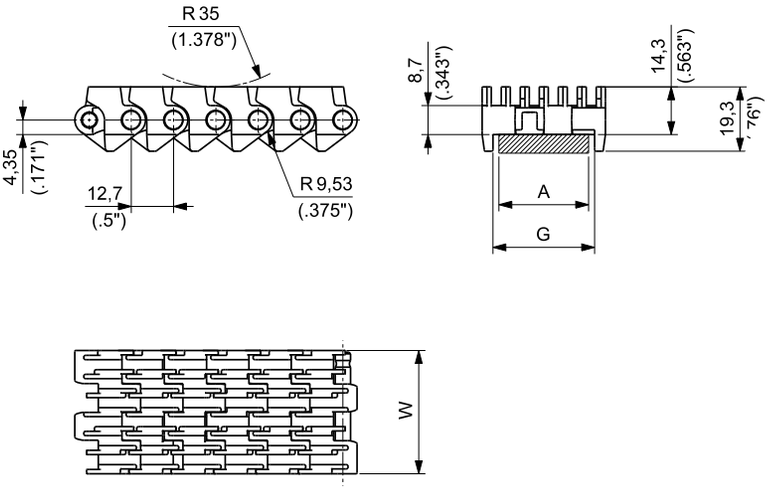

Materials see page 14
Combs see page 187
Sprockets see pages 190÷194
Applications see page 24

MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		INTERNAL GUIDE G		GUIDE TRACK A		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	PBT	WITHOUT TRACKING GUIDE	RR611A UP K 29	**RR611AUPKWB/000**	29	1.14	-	-	-	-	570	128	0,37	0.25
			RR611A UP K 37	**RR611AUPKAD/000**	37	1.46	-	-	-	-	570	128	0,47	0.32
			RR611A UP K 46	**RR611AUPKNA/000**	46	1.81	-	-	-	-	570	128	0,57	0.38
			RR611A UP K 55	**RR611AUPKCB/000**	55	2.17	-	-	-	-	570	128	0,69	0.46
			RR611A UP K 76	**RR611AUPKDA/000**	76	2.99	-	-	-	-	1067	240	0,75	0.50
		WITH TRACKING GUIDE	RR611AG UP K 37	**RR611AGUPKAD/000**	37	1.46	30,5	1.20	30	1.18	570	128	0,50	0.34

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




TRANSFER COMBS

Combs are supplied complete with slot covers but without fastening screws.
One M5 hexagon socket contersunk head screw (NOT INCLUDED) is required for each comb.

MATERIALS


COMBS: **UP** ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®

COMB FOR K 29 CHAIN

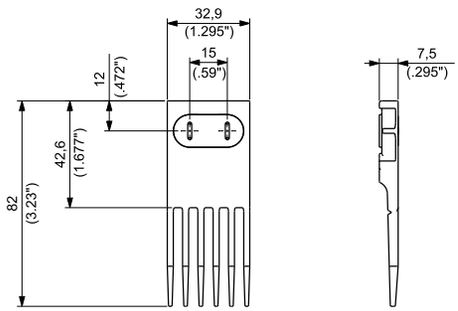


PART NUMBER **TC611-01**

COMB FOR K 37 CHAIN

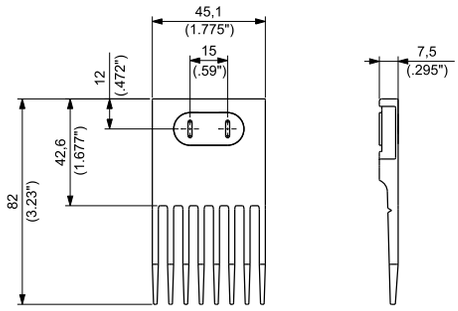


PART NUMBER **TC611-03**

COMB FOR K 46 CHAIN

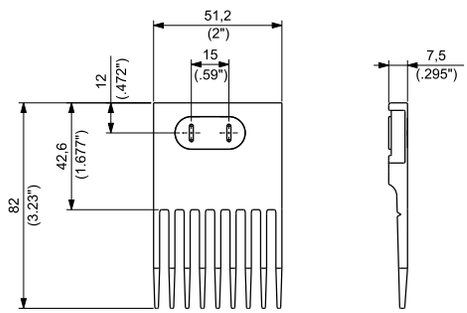


PART NUMBER **TC611-04**

COMB FOR K 55 CHAIN

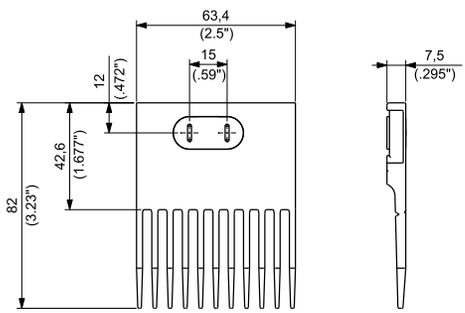


PART NUMBER **TC611-06**

COMB FOR K 76 CHAIN

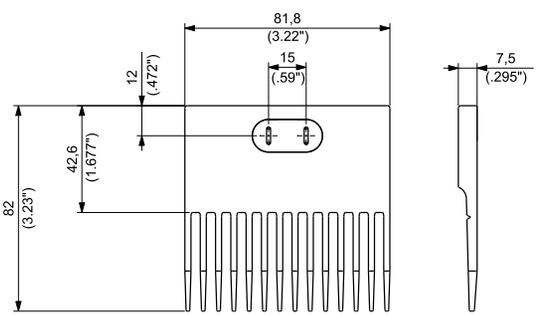


PART NUMBER **TC611-07**

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

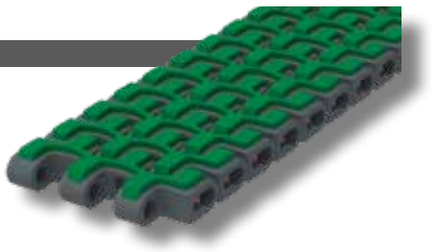

8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE

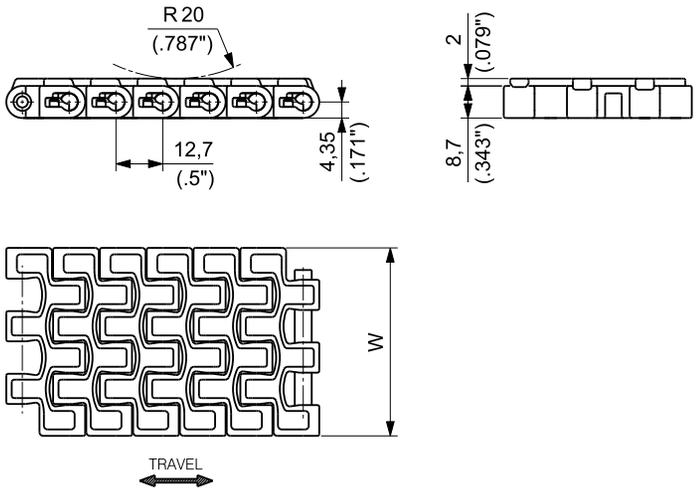

Materials see page 14
Sprockets see pages 191÷194
Applications see page 24

MATERIALS			ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin	Rubber			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
SPECIAL POLYPROPYLENE PP	PBT	THERMOPLASTIC TPE Hardness: 50 ShA	HF 500 PP 0051	HF500APP0051	51	2	8,7	0.343	450	101	0,35	0.24

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SIDEFLEXING MAGNETIC
8,7 mm (0.343") THICKNESS
SOLID TOP

NEW




DUPONT® KEVLAR® INSIDE

e-F.A.S.T. ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

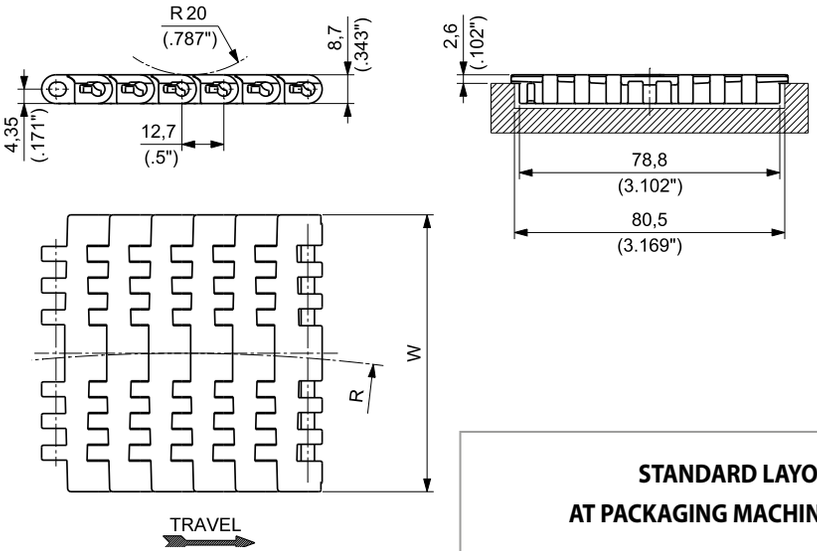

STANDARD LAYOUT AT PACKAGING MACHINE INFEED

LAYOUT WITH 650M SERIES

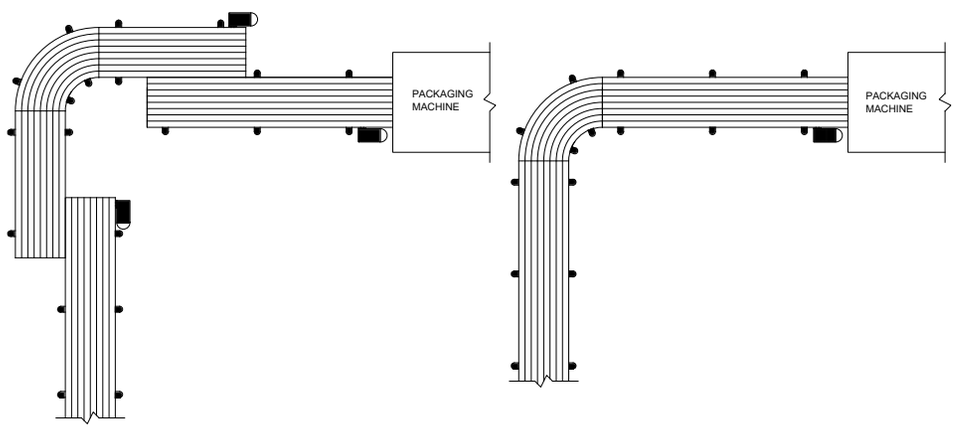

Materials see page 14
Nosebar see page 182
Sprockets see pages 191÷194
Corner tracks see page 301
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	MAGNETIC STAINLESS STEEL	UP 650M K 83,8	UP650MKRA/000	83,8	3.30	8,7	0.34	500	19.685	2500	562	1,19	0.80
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		D2K 650M K 83,8	D2K650MKRA/000	83,8	3.30	8,7	0.34	500	19.685	2500	562	1,19	0.80
ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.		EF 650M K 83,8	EF650MKRA/000	83,8	3.30	8,7	0.34	500	19.685	2500	562	1,19	0.80

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **611 WITH TRACKING GUIDE (29 mm, 34 mm, 37 mm WIDTHS ONLY)**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS*:	SS	STAINLESS STEEL
NUTS*:	ZN	ZINC PLATED STEEL

* For split sprockets only.




16T SPROCKET

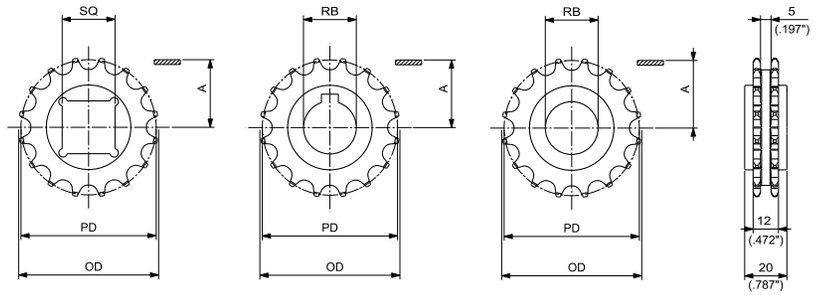

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

28T SPROCKET

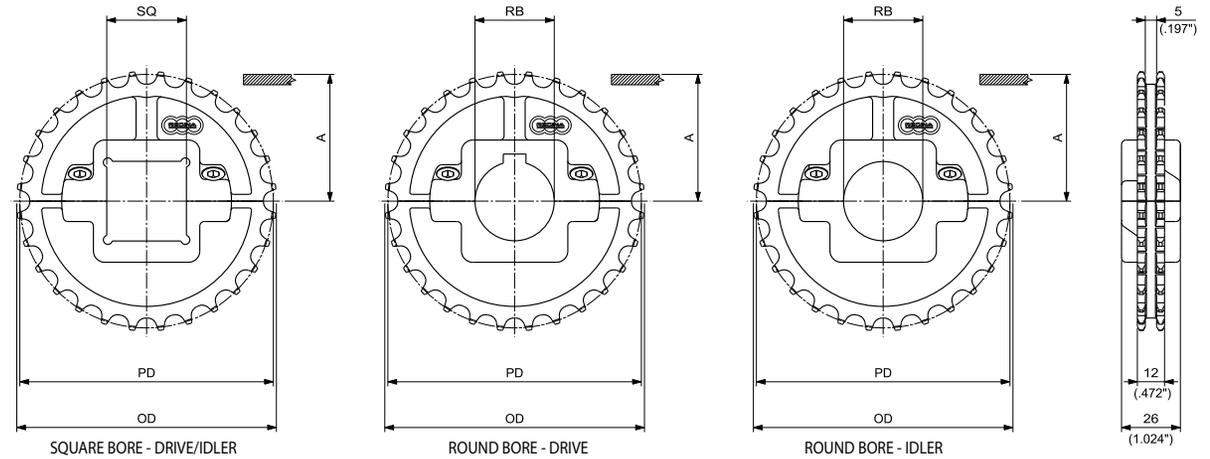

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MOULDED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
16	65,10	2.563	66,30	2.610	28,20	1.110	20			MPBT6111620	MPBF6111620	0,05	0.11
							25		MPBQ6111625	MPBT6111625	MPBF6111625	0,04	0.09
							30			MPBT6111630	MPBF6111630	0,04	0.09
								1		MPBT61116254	MPBF61116254	0,04	0.09
								1¼		MPBT61116317	MPBF61116317	0,03	0.07

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
28	113,43	4.466	114,70	4.516	52,40	2.063	25			MPBST6112825	MPBSF6112825	0,15	0.33
							30			MPBST6112830	MPBSF6112830	0,15	0.33
							35			MPBST6112835	MPBSF6112835	0,14	0.31
							40		MPBSQ6112840	MPBST6112840	MPBSF6112840	0,13	0.29
								1		MPBST61128254	MPBSF61128254	0,15	0.33
								1¼		MPBST61128317	MPBSF61128317	0,14	0.31
								1½	MPBSQ61128381	MPBST61128381	MPBSF61128381	0,14	0.31

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUITABLE FOR CHAINS:

- **600 / 610 / LBP 610**
- **500 / HF 500 / HF 510 / HFS 510**
- **300 / 200 / HF 200**
- **650M**
- **611 WITHOUT TRACKING GUIDE (ALL WIDTHS)**
- **611 WITH TRACKING GUIDE (51 mm, 76 mm WIDTHS ONLY)**
- **RR 611 (ALL WIDTHS)**

MATERIALS	
SPROCKETS:	PGF REINFORCED POLYAMIDE




16T SPROCKET

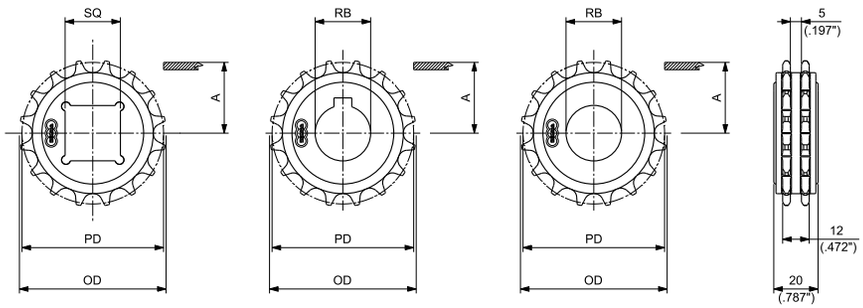

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

28T SPROCKET

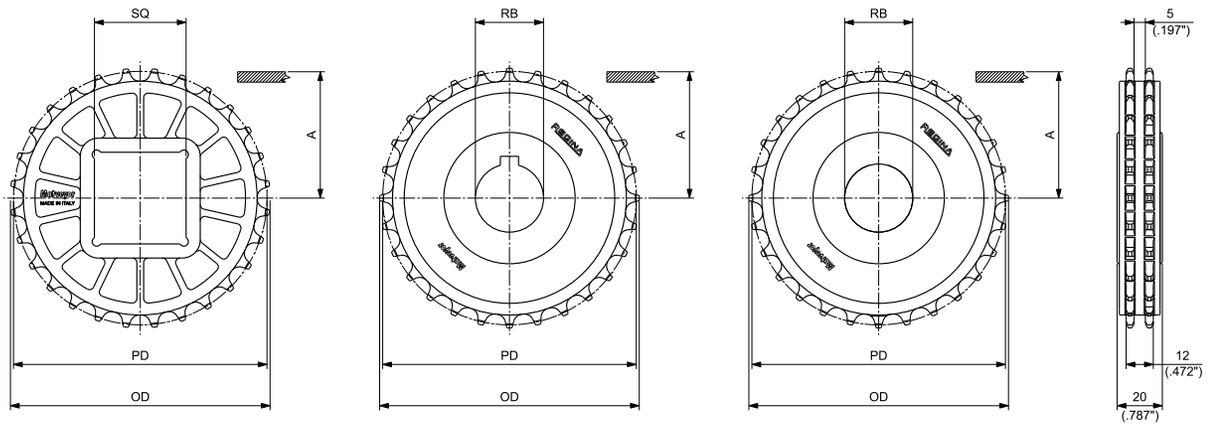

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MOULDED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
16	65,10	2.563	66,30	2.610	28,20	1.110	20			**MPBT6001620**	**MPBF6001620**	0,06	0.13
							25		**MPBQ6001625**	**MPBT6001625**	**MPBF6001625**	0,05	0.12
							30			**MPBT6001630**	**MPBF6001630**	0,05	0.10
								1		**MPBT60016254**	**MPBF60016254**	0,05	0.12
								1¼		**MPBT60016317**	**MPBF60016317**	0,04	0.10
28	113,43	4.466	114,70	4.516	52,40	2.063	25			**MPBT6002825**	**MPBF6002825**	0,15	0.32
							30			**MPBT6002830**	**MPBF6002830**	0,14	0.31
							35			**MPBT6002835**	**MPBF6002835**	0,13	0.29
							40		**MPBQ6002840**	**MPBT6002840**	**MPBF6002840**	0,12	0.27
							60		**MPBQ6002860**			0,10	0.23
								1		**MPBT60028254**	**MPBF60028254**	0,15	0.32
								1¼		**MPBT60028317**	**MPBF60028317**	0,14	0.30
								1½		**MPBT60028381**	**MPBF60028381**	0,13	0.28

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUITABLE FOR CHAINS:

- **600 / 610 / LBP 610**
- **500 / HF 500 / HF 510 / HFS 510**
- **300 / 200 / HF 200**
- **650M**
- **611 WITHOUT TRACKING GUIDE (ALL WIDTHS)**
- **611 WITH TRACKING GUIDE (51 mm, 76 mm WIDTHS ONLY)**
- **RR 611 (ALL WIDTHS)**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE




8T SPROCKET



NOTE: CANNOT WORK WITH 600 AND 500 SERIES

14T - 19T SPROCKET

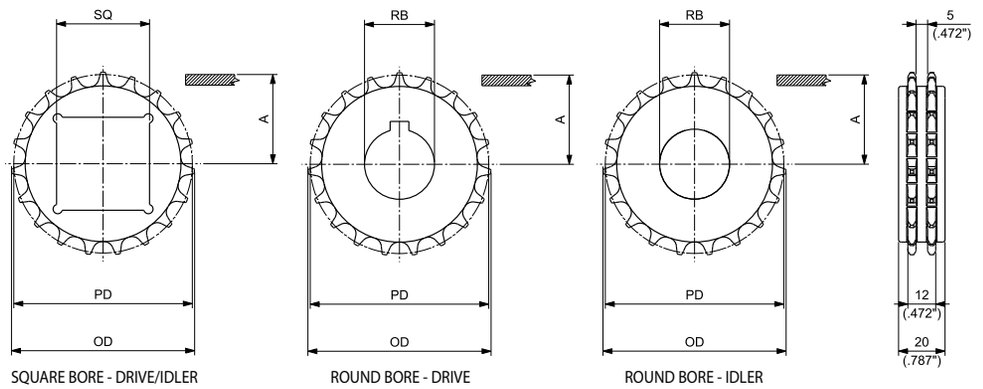

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
8[1]	33,19	1.307	34,20	1.346	12,25	0.482	20			**MPBAT6000820**	**MPBAF6000820**	0,01	0,01
								¾		**MPBAT60008190**	**MPBAF60008190**	0,01	0,01
14	57,07	2.247	59,00	2.323	24,18	0.952	25		**MPBAQ6001425**	**MPBAT6001425**	**MPBAF6001425**	0,03	0.06
								1		**MPBAT60014254**	**MPBAF60014254**	0,03	0.06
19	77,15	3.037	78,80	3.102	34,20	1.346	25			**MPBAT6001925**	**MPBAF6001925**	0,07	0.16
							30			**MPBAT6001930**	**MPBAF6001930**	0,07	0.15
							35			**MPBAT6001935**	**MPBAF6001935**	0,06	0.13
							40		**MPBAQ6001940**	**MPBAT6001940**	**MPBAF6001940**	0,05	0.12
								1		**MPBAT60019254**	**MPBAF60019254**	0,07	0.16
								1¼		**MPBAT60019317**	**MPBAF60019317**	0,07	0.14
								1½	**MPBAQ60019381**			0,05	0.11

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew (except for 8T sprocket). Metric round bore drive sprockets are supplied without setscrew.
(1) Cannot work with 600 and 500 series.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **600 / 610 / LBP 610**
- **500 / HF 500 / HF 510 / HFS 510**
- **300 / 200 / HF 200**
- **650M**
- **611 WITHOUT TRACKING GUIDE (ALL WIDTHS)**
- **611 WITH TRACKING GUIDE (51 mm, 76 mm WIDTHS ONLY)**
- **RR 611 (ALL WIDTHS)**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	ZN	ZINC PLATED STEEL



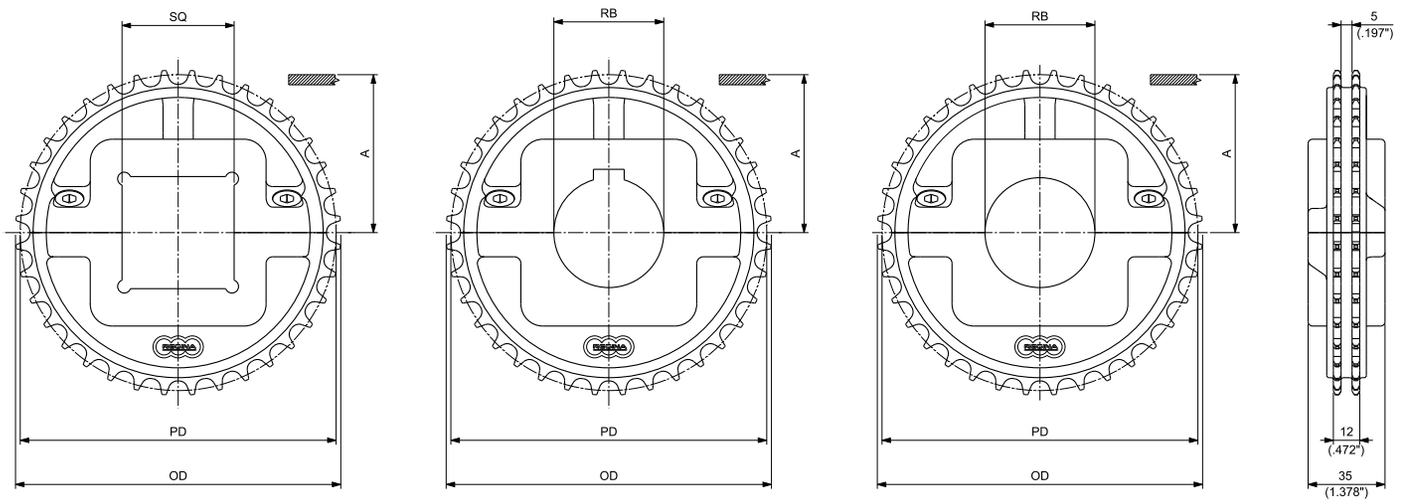

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

NOTE: FOR 28T SPROCKET, THE HUB WIDTH IS 26 mm (1.024")

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							25			**MPBST6002825**	**MPBSF6002825**	0,16	0.35
							30			**MPBST6002830**	**MPBSF6002830**	0,16	0.34
							35			**MPBST6002835**	**MPBSF6002835**	0,15	0.33
28	113,43	4.466	114,69	4.515	52,40	2.063	40		**MPBSQ6002840**	**MPBST6002840**	**MPBSF6002840**	0,14	0.32
								1		MPBST60028254	MPBSF60028254	0,16	0.35
								1¼		MPBST60028317	MPBSF60028317	0,15	0.34
								1½	MPBSQ60028381	MPBST60028381	MPBSF60028381	0,15	0.32
							30			**MPBST6003630**	**MPBSF6003630**	0,38	0.83
							35			**MPBST6003635**	**MPBSF6003635**	0,37	0.82
							40		**MPBSQ6003640**	**MPBST6003640**	**MPBSF6003640**	0,36	0.80
							45			**MPBST6003645**	**MPBSF6003645**	0,35	0.78
36	145,69	5.736	148,00	5.827	68,50	2.697	50		**MPBSQ6003650**	**MPBST6003650**	**MPBSF6003650**	0,34	0.75
								1		MPBST60036254	MPBSF60036254	0,38	0.85
								1 3/16		MPBST60036301	MPBSF60036301	0,38	0.83
								1¼		MPBST60036317	MPBSF60036317	0,38	0.83
								1 7/16		MPBST60036365	MPBSF60036365	0,37	0.81
								1½	MPBSQ60036381	MPBST60036381	MPBSF60036381	0,37	0.81
							30			**MPBST6003830**	**MPBSF6003830**	0,39	0.86
							35			**MPBST6003835**	**MPBSF6003835**	0,38	0.84
							40		**MPBSQ6003840**	**MPBST6003840**	**MPBSF6003840**	0,37	0.83
							45			**MPBST6003845**	**MPBSF6003845**	0,36	0.80
38	153,8	6.055	156,00	6.142	72,55	2.856	50		**MPBSQ6003850**	**MPBST6003850**	**MPBSF6003850**	0,35	0.78
								1		MPBST60038254	MPBSF60038254	0,40	0.87
								1 3/16		MPBST60038301	MPBSF60038301	0,39	0.86
								1¼		MPBST60038317	MPBSF60038317	0,39	0.86
								1 7/16		MPBST60038365	MPBSF60038365	0,38	0.84
								1½	MPBSQ60038381	MPBST60038381	MPBSF60038381	0,38	0.84

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **600 / 610 / LBP 610**
- **500 / HF 500 / HF 510 / HFS 510**
- **300 / 200 / HF 200**
- **650M**
- **611 WITHOUT TRACKING GUIDE (ALL WIDTHS)**
- **611 WITH TRACKING GUIDE (51 mm, 76 mm WIDTHS ONLY)**
- **RR 611 (ALL WIDTHS)**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



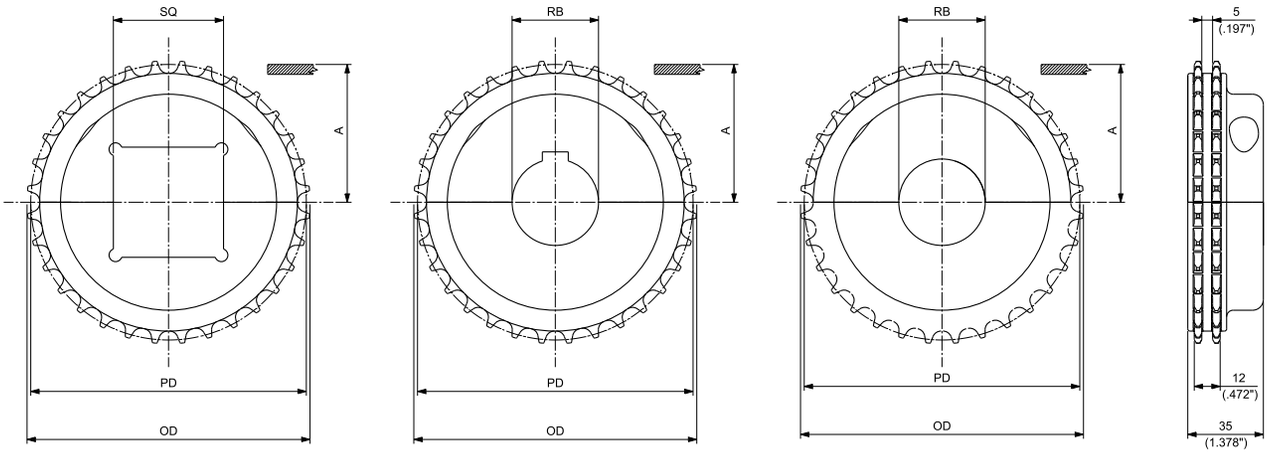

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							25			**MPBAST6003225**	**MPBASF6003225**	0,41	0.90
							30			**MPBAST6003230**	**MPBASF6003230**	0,40	0.88
							35			**MPBAST6003235**	**MPBASF6003235**	0,39	0.85
							40		**MPBASQ6003240**	**MPBAST6003240**	**MPBASF6003240**	0,38	0.83
							45			**MPBAST6003245**	**MPBASF6003245**	0,36	0.80
32	129,57	5.101	131,00	5.157	60,44	2.379	50		**MPBASQ6003250**	**MPBAST6003250**	**MPBASF6003250**	0,35	0.77
								1		**MPBAST60032254**	**MPBASF60032254**	0,41	0.90
								1 3/16		**MPBAST60032301**	**MPBASF60032301**	0,40	0.88
								1 1/4		**MPBAST60032317**	**MPBASF60032317**	0,39	0.87
								1 7/16		**MPBAST60032365**	**MPBASF60032365**	0,38	0.85
								1 1/2		**MPBAST60032381**	**MPBASF60032381**	0,38	0.84

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **500 / 600 / 610 / LBP 610 / HF 510 / HFS 510 / 300 / 200 / HF 200 / 650M**
- **1500 / 1600 / RR 1500 / HF 1600 / HFS 1600**
- **7300 / 7200**
- **USPM / USP / HF USPM / HFS USPM / LBP USPM / LBP XSPM**
- **782M / 783M / 793M**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	ZN	ZINC PLATED STEEL



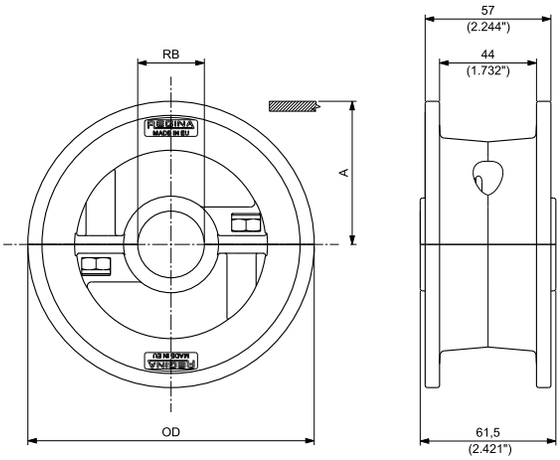



MOULDED SOLID IDLER WHEELS
See page 124



MACHINED SPLIT IDLER WHEELS
See page 126

MOULDED SPLIT IDLER WHEELS

N. TEETH	OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch		Kg	lbs
21	129,80	5.110	64,90	2.555	25		**CMTS048152125**	0,33	0.72
					30		**CMTS048152130**	0,33	0.73
					35		**CMTS048152135**	0,31	0.68
					40		**CMTS048152140**	0,34	0.76
					45		**CMTS048152145**	0,31	0.69
						1	**CMTS0481521254**	0,33	0.72
						1¼	**CMTS0481521317**	0,33	0.71
23	142,30	5.602	71,15	2.801	25		**CMTS048152325**	0,36	0.80
					30		**CMTS048152330**	0,37	0.81
					35		**CMTS048152335**	0,35	0.76
					40		**CMTS048152340**	0,38	0.84
					45		**CMTS048152345**	0,35	0.77
						1	**CMTS0481523254**	0,36	0.80
						1¼	**CMTS0481523317**	0,36	0.79
25	154,70	6.091	77,35	3.045	25		**CMTS048152525**	0,40	0.89
					30		**CMTS048152530**	0,41	0.90
					35		**CMTS048152535**	0,39	0.85
					40		**CMTS048152540**	0,42	0.92
					45		**CMTS048152545**	0,39	0.86
						1	**CMTS0481525254**	0,40	0.89
						1¼	**CMTS0481525317**	0,40	0.88

*Diameter is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®


1″ Pitch Light Duty Belts and Chains

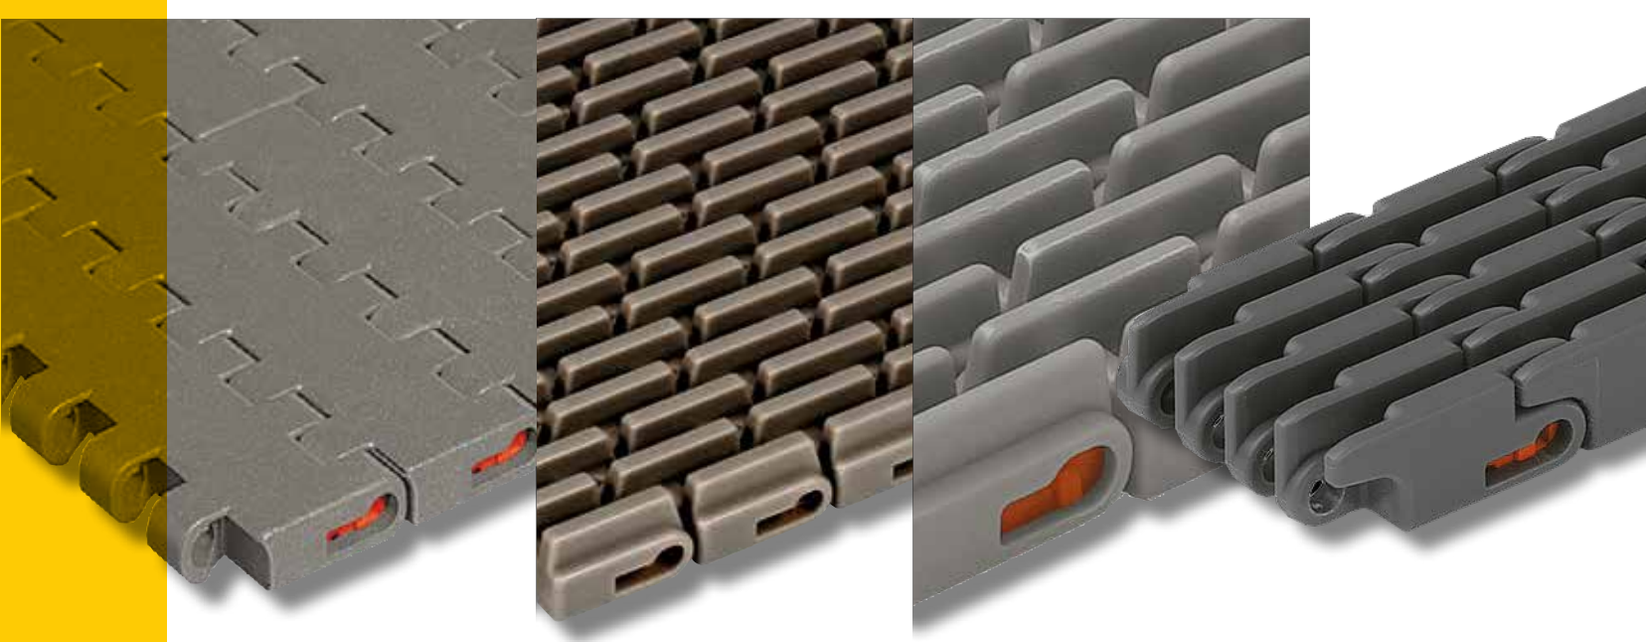


INDUSTRIES AND APPLICATIONS

Suitable for handling both loose & packaged products, such as plastic & glass bottles and aluminium & steel cans, in light duty applications

INDUSTRIES	APPLICATIONS
Bottling and canning	Depalletizer
Food filling	Pressureless Inliners and Combiners
Container manufacturing	Single lane & mass conveyors
Pharmaceutical	Accumulation tables
Paper/cardboard	Infeed packaging machines
Consumer goods	Palletizers

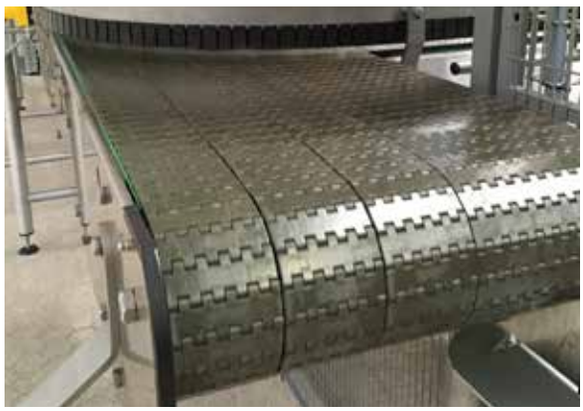

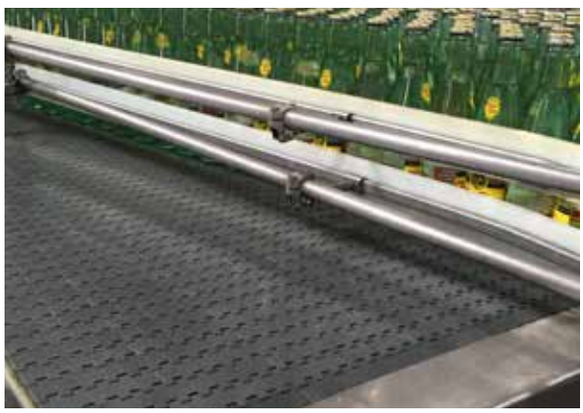


FEATURES



- Clip integrated with the module on the belt bottom results in an easy belt assembly and disassembly and in a uniform top surface.
- Round design edge and gap minimization between hinges allow a superior product handling in linear and side transfer of the products
- Optimized bottom sliding surface to guarantee wider contact with the wear strips and higher transversal stiffness:
  - Less specific pressure between belt and wear strips
  - Less wear
  - Superior flatness



- Rubberized belts available (HF 1600 series) featuring maximum and uniform rubberized area allowing outstanding gripping capabilities on the conveyed products.
- Solid top and flush grid belts can be used on conveyors side by side with Magnetic or TAB sideflexing chains 783 or 782 series allowing a smooth products transfer between straight running and sideflexing conveyors.



- Availability of a wide range of raised rib dedicated chains RR 1600 series suitable for the product dynamic dividing area of packaging machines.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


8,7 mm (0.343") THICKNESS
SOLID TOP



Extremely good flatness, manufacturing accuracy and low coefficient of friction make the side transfer of the product very easy.
Completely closed surface, no gap between the modules, even when engaging on the sprockets.
Particulary suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base).

DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

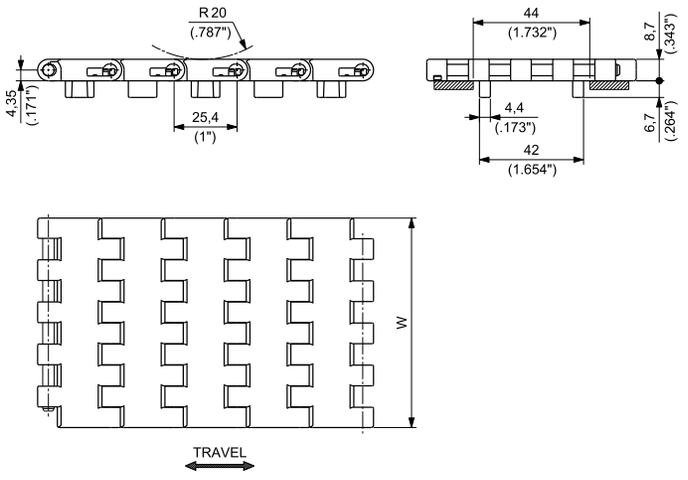

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP		1600AG UP K 83,8	1600AGUPKRA/000	83,8	3.30	8,7	0.343	1850	416	0,75	0.50
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	PBT	1600AG D2K K 83,8	1600AGD2KKRA/000	83,8	3.30	8,7	0.343	1850	416	0,75	0.50
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™		1600AG EF K 83,8	1600AGEFKRA/000	83,8	3.30	8,7	0.343	1850	416	0,75	0.50

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved



8,7 mm (0.343") THICKNESS
SOLID TOP


his belt offers a smooth surface to provide excellent support and minimize product tippage. Particulary suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base).

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 21600 N/m (1,480 lbs/ft) for UP, DK2™ and e-F.A.S.T.™ materials
- **Belt weight:** 7,66 kg/m² (1.57 lbs/ft²) for UP, DK2™ and e-F.A.S.T.™ materials


DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

VERSION WITHOUT TRACKING GUIDE

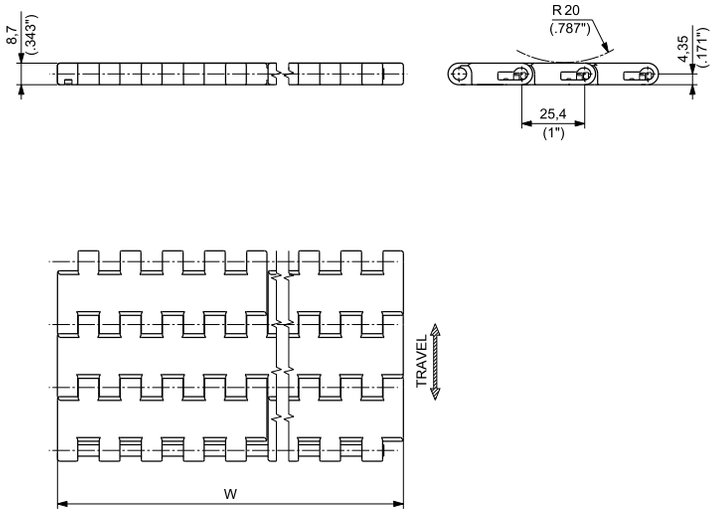

VERSION WITH TRACKING GUIDE

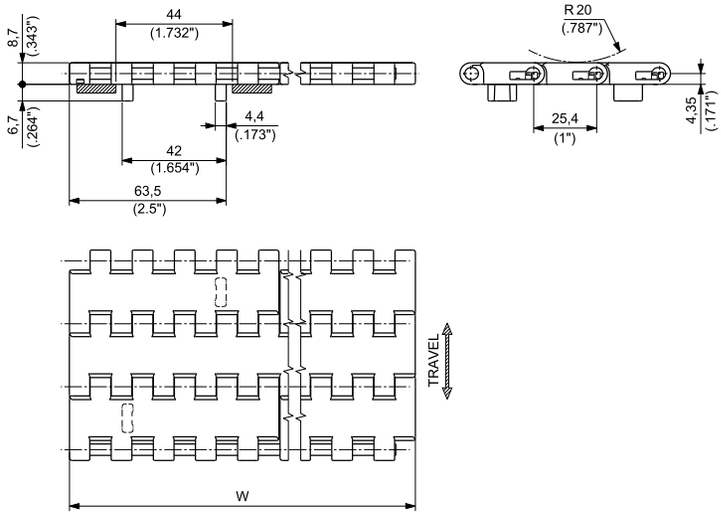

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS						
		Module						Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®		NEW e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMOPLASTIC		
		PART NUMBER		PART NUMBER		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**1600AUP0085**	**1600AGUP0085**	**1600AD2K0085**	**1600AGD2K0085**	**1600AEF0085**	**1600AGEF0085**	PBT
170	6.69	**1600BUP0170**	**1600BG1UP0170**	**1600BD2K0170**	**1600BG1D2K0170**	**1600AEF0170**	**1600AG1EF0170**	PBT for e-F.A.S.T. material POLYPROPYLENE for all other materials (PBT on request for all other materials)
255	10.04	**1600BUP0255**	**1600BG1UP0255**	**1600BD2K0255**	**1600BG1D2K0255**	**1600AEF0255**	**1600AG1EF0255**	
340	13.39	**1600BUP0340**	**1600BG1UP0340**	**1600BD2K0340**	**1600BG1D2K0340**	**1600AEF0340**	**1600AG1EF0340**	
425	16.73	**1600BUP0425**	**1600BG1UP0425**	**1600BD2K0425**	**1600BG1D2K0425**	**1600AEF0425**	**1600AG1EF0425**	
510	20.08	**1600BUP0510**	**1600BG1UP0510**	**1600BD2K0510**	**1600BG1D2K0510**	**1600AEF0510**	**1600AG1EF0510**	
595	23.43	**1600BUP0595**	**1600BG1UP0595**	**1600BD2K0595**	**1600BG1D2K0595**	**1600AEF0595**	**1600AG1EF0595**	
680	26.77	**1600BUP0680**	**1600BG1UP0680**	**1600BD2K0680**	**1600BG1D2K0680**	**1600AEF0680**	**1600AG1EF0680**	
765	30.12	**1600BUP0765**	**1600BG1UP0765**	**1600BD2K0765**	**1600BG1D2K0765**	**1600AEF0765**	**1600AG1EF0765**	
850	33.46	**1600BUP0850**	**1600BG1UP0850**	**1600BD2K0850**	**1600BG1D2K0850**	**1600AEF0850**	**1600AG1EF0850**	
935	36.81	**1600BUP0935**	**1600BG1UP0935**	**1600BD2K0935**	**1600BG1D2K0935**	**1600AEF0935**	**1600AG1EF0935**	
1020	40.16	**1600BUP1020**	**1600BG1UP1020**	**1600BD2K1020**	**1600BG1D2K1020**	**1600AEF1020**	**1600AG1EF1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "1600BUP1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved





8,7 mm (0.343") THICKNESS
SOLID TOP

1600G ATM can be used in combination with 1600 modular belts.
Active transfer modules 1600G ATM allow the transfer of products between two 90° conveyor tracks without using dead plates.
The special wing shaped module profile supports the products dynamically during transfer on the take-away belts.
Available in left and right version.


DUPONT® KEVLAR® INSIDE


ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

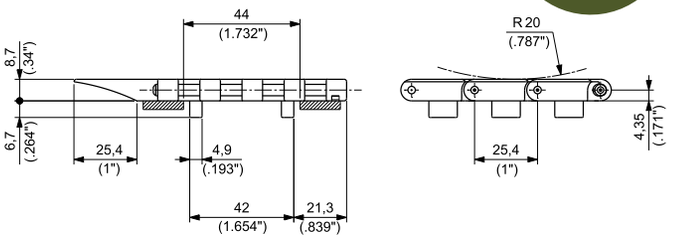



Left version

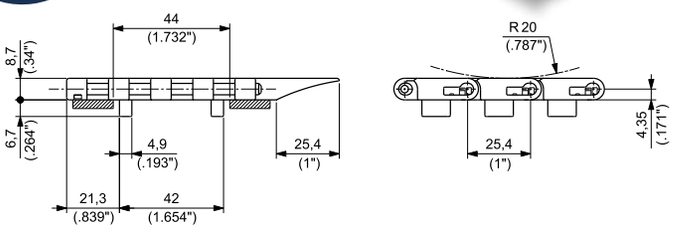

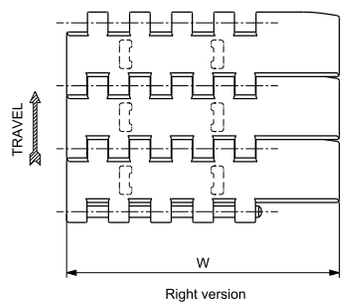

Right version

Materials see page 14

Sprockets see pages 215÷221

Applications see page 24

1600G ATM - Left Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	POLYPROPYLENE	1600BGATM UP 0085 SX	1600BGATMUP085S	110	4.33	8,7	0.343	1840	414	0,85	0.57
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	POLYPROPYLENE	1600BGATM D2K 0085 SX	1600BGATMD2K085S	110	4.33	8,7	0.343	1840	414	0,85	0.57
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	PBT	1600AGATM EF 0085 SX	1600AGATMEF085S	110	4.33	8,7	0.343	1840	414	0,85	0.57

1600G ATM - Right Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	POLYPROPYLENE	1600BGATM UP 0085 DX	1600BGATMUP085D	110	4.33	8,7	0.343	1840	414	0,85	0.57
		1600BGATM UP 0170 DX	1600BGATMUP170D	195	7.68	8,7	0.343	3670	825	1,51	1.01
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		1600BGATM D2K 0085 DX	1600BGATMD2K085D	110	4.33	8,7	0.343	1840	414	0,85	0.57
		1600BGATM D2K 0170 DX	1600BGATMD2K170D	195	7.68	8,7	0.343	3670	825	1,51	1.01
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	PBT	1600AGATM EF 0085 DX	1600AGATMEF085D	110	4.33	8,7	0.343	1840	414	0,85	0.57
		1600AGATM EF 0170 DX	1600AGATMEF170D	195	7.68	8,7	0.343	3670	825	1,51	1.01

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
FLUSH GRID


NEW



Excellent planarity for a superior stability and improved side transfer of the most critical beverage containers.
Optimized design of the open area ensuring that liquids and contamination do not remain on the chain surface.
Ideal for high speed single track conveyors and pressureless combiners and decombiners.

DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

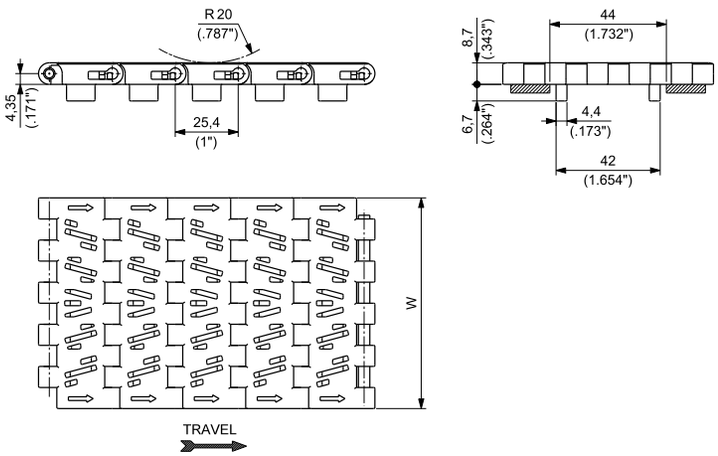

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP		1501AG UP K 83,8	1501AGUPKRA/000	83,8	3.30	8,7	0.343	1850	416	0,73	0.49
		1501AG UP K 85	1501AGUP0085	85,0	3.35	8,7	0.343	1850	416	0,73	0.49
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	PBT	1501AG D2K K 83,8	1501AGD2KKRA/000	83,8	3.30	8,7	0.343	1850	416	0,73	0.49
		1501AG D2K K 85	1501AGD2K0085	85,0	3.35	8,7	0.343	1850	416	0,73	0.49
ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™ NEW		1501AG EF K 83,8	1501AGEFKRA/000	83,8	3.30	8,7	0.343	1850	416	0,73	0.49
		1501AG EF K 85	1501AGEF0085	85,0	3.35	8,7	0.343	1850	416	0,73	0.49

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
FLUSH GRID




This belt has an excellent combination of open and support areas to allow drainage of liquids and good support of the conveyed product. This belt is particularly suitable for conveying of aluminium cans.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 21600 N/m (1,480 lbs/ft) for UP and DK2™ materials
  13200 N/m (904 lbs/ft) for PP material
- **Belt weight:** 6,58 kg/m² (1.58 lbs/ft²) for UP and DK2™ materials
  4,43 kg/m² (1.35 lbs/ft²) for PP material

DUPONT® KEVLAR® INSIDE

VERSION WITHOUT TRACKING GUIDE

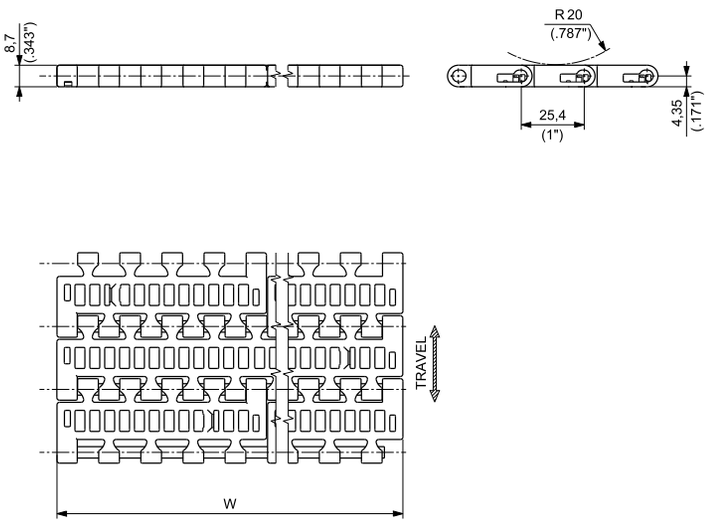

VERSION WITH TRACKING GUIDE

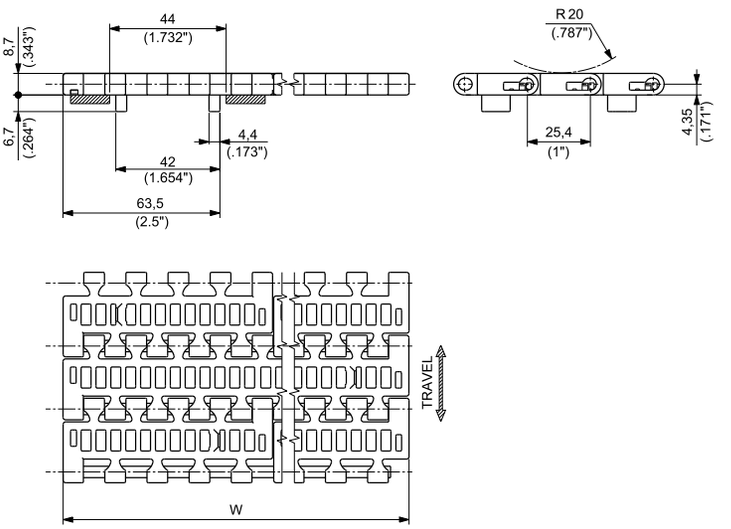

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS						
		Module						Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN®		DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®		PP SPECIAL POLYPROPYLENE[1]		
		PART NUMBER		PART NUMBER		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**1500AUP0085**		**1500AD2K0085**		**1500APP0085**	**1500AGPP0085**	PBT
170	6.69	**1500BUP0170**	**1500BG1UP0170**	**1500BD2K0170**	**1500BG1D2K0170**	**1500BPP0170**	**1500BG1PP0170**	
255	10.04	**1500BUP0255**	**1500BG1UP0255**	**1500BD2K0255**	**1500BG1D2K0255**	**1500BPP0255**	**1500BG1PP0255**	
340	13.39	**1500BUP0340**	**1500BG1UP0340**	**1500BD2K0340**	**1500BG1D2K0340**	**1500BPP0340**	**1500BG1PP0340**	
425	16.73	**1500BUP0425**	**1500BG1UP0425**	**1500BD2K0425**	**1500BG1D2K0425**	**1500BPP0425**	**1500BG1PP0425**	
510	20.08	**1500BUP0510**	**1500BG1UP0510**	**1500BD2K0510**	**1500BG1D2K0510**	**1500BPP0510**	**1500BG1PP0510**	POLYPROPYLENE
595	23.43	**1500BUP0595**	**1500BG1UP0595**	**1500BD2K0595**	**1500BG1D2K0595**	**1500BPP0595**	**1500BG1PP0595**	(PBT on request)
680	26.77	**1500BUP0680**	**1500BG1UP0680**	**1500BD2K0680**	**1500BG1D2K0680**	**1500BPP0680**	**1500BG1PP0680**	
765	30.12	**1500BUP0765**	**1500BG1UP0765**	**1500BD2K0765**	**1500BG1D2K0765**	**1500BPP0765**	**1500BG1PP0765**	
850	33.46	**1500BUP0850**	**1500BG1UP0850**	**1500BD2K0850**	**1500BG1D2K0850**	**1500BPP0850**	**1500BG1PP0850**	
935	36.81	**1500BUP0935**	**1500BG1UP0935**	**1500BD2K0935**	**1500BG1D2K0935**	**1500BPP0935**	**1500BG1PP0935**	
1020	40.16	**1500BUP1020**	**1500BG1UP1020**	**1500BD2K1020**	**1500BG1D2K1020**	**1500BPP1020**	**1500BG1PP1020**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "1500BUP1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




8,7 mm (0.343") THICKNESS
FLUSH GRID

This belt has an excellent combination of open and support areas to allow drainage of liquids and good support of the conveyed product. This belt is particularly suitable for conveying of aluminium cans.


- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 21600 N/m (1,480 lbs/ft) for e-F.A.S.T.™ materials
- **Belt weight:** 6,58 kg/m² (1.58 lbs/ft²) for e-F.A.S.T.™ materials

e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

VERSION WITHOUT TRACKING GUIDE

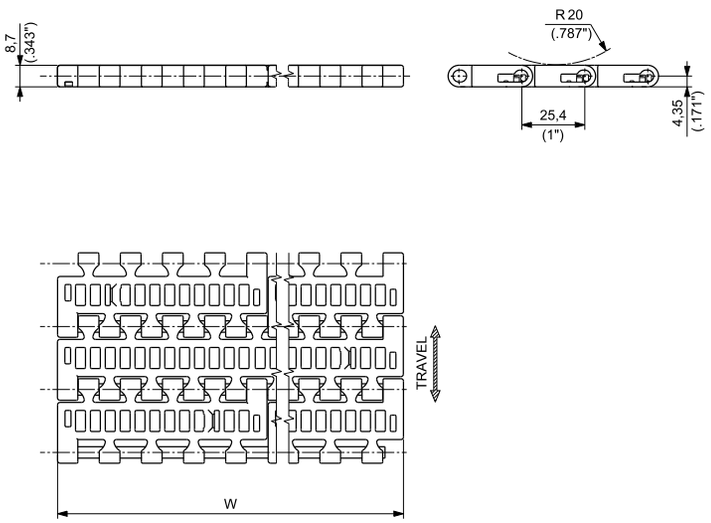

VERSION WITH TRACKING GUIDE

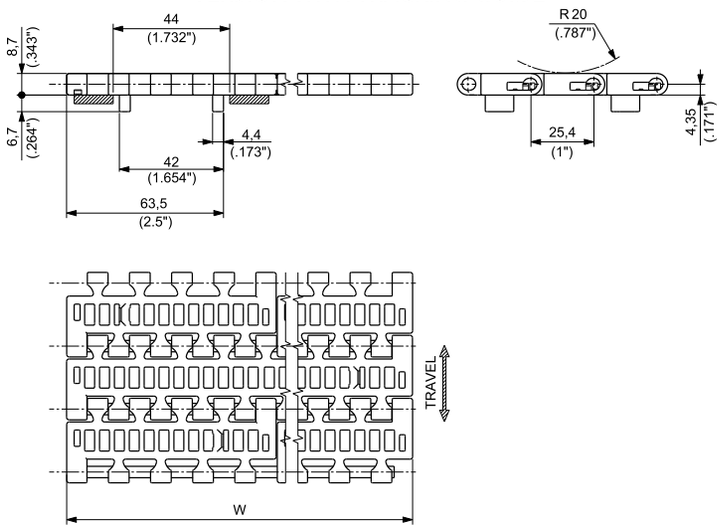

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS		
		NEW Module		Pin
		e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMOPLASTIC		
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**1500AEF0085**		PBT
170	6.69	**1500AEF0170**	**1500AG1EF0170**	
255	10.04	**1500AEF0255**	**1500AG1EF0255**	
340	13.39	**1500AEF0340**	**1500AG1EF0340**	
425	16.73	**1500AEF0425**	**1500AG1EF0425**	
510	20.08	**1500AEF0510**	**1500AG1EF0510**	
595	23.43	**1500AEF0595**	**1500AG1EF0595**	
680	26.77	**1500AEF0680**	**1500AG1EF0680**	
765	30.12	**1500AEF0765**	**1500AG1EF0765**	
850	33.46	**1500AEF0850**	**1500AG1EF0850**	
935	36.81	**1500AEF0935**	**1500AG1EF0935**	
1020	40.16	**1500AEF1020**	**1500AG1EF1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for EF material is "1500AEF1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




ACTIVE TRANSFER MODULES
8,7 mm (0.343") THICKNESS
FLUSH GRID

1500G ATM can be used in combination with 1500 Modular belts series.
Active transfer modules 1500G ATM allow the transfer of products between two 90° conveyor tracks without using dead plates.
The special wing shaped module profile supports the products dynamically during transfer on the take-away belt.
This system is particularly suitable for aluminium cans.

DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

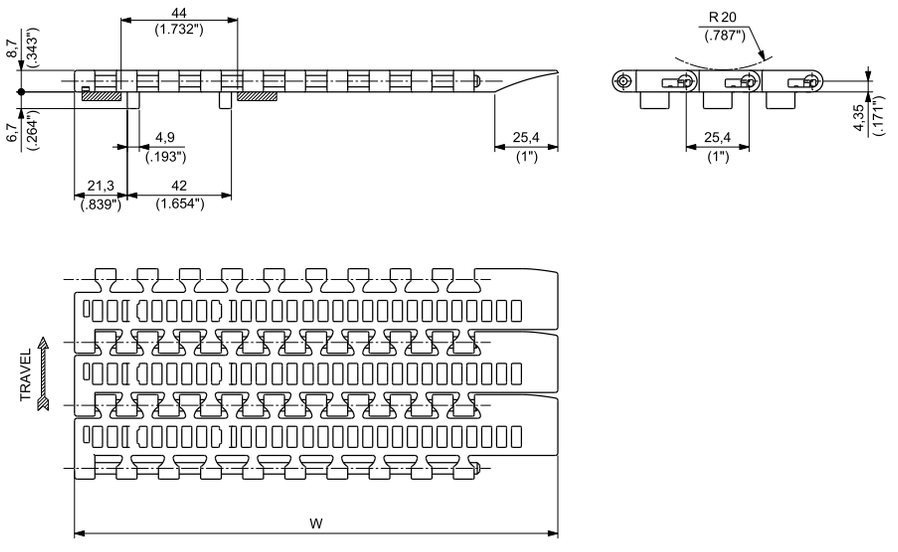

Right version

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

1500G ATM - Right Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	POLYPROPYLENE	1500BGATM UP 0170 DX	1500BGATMUP170D	195	7.68	8,7	0.343	3670	825	0,85	0.57
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	POLYPROPYLENE	1500BGATM D2K 0170 DX	1500BGATMD2K170D	195	7.68	8,7	0.343	3670	825	0,85	0.57
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™	PBT	1500AGATM EF 0170 DX	1500AGATMEF170D	195	7.68	8,7	0.343	3670	825	0,85	0.57

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved



8,7 mm (0.343") THICKNESS
FLUSH GRID
FOR INCLINE/DECLINE APPLICATIONS

The 1500 series are also available in a version with flights.
Flights can now be integrated into 1500 series conveyors, to convey products in incline or decline applications.
Flight modules are single-piece elements made by injection-molding that, once assembled, become an integral part of the belt.



Flights are available in 1" (25,4 mm), 2" (50,8 mm) or 3" (76,2 mm) standard heights (F dimension).
Flights can be as wide as the module (see exhibit 1), or have a 45 mm (1.772") side indent (see exhibit 2).

EXHIBIT 1


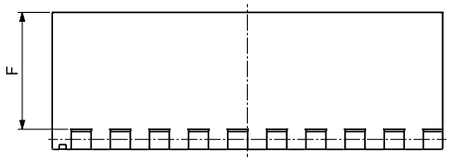



EXHIBIT 2

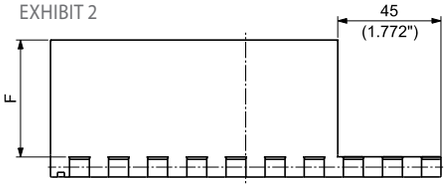

The position of flights into a 1500 modular belt can be customized to fit different applications or conveyor designs, by specifying the following parameters:

1) Flights pitch (K): distance between 2 rows of flights (see exhibit 3).

EXHIBIT 3

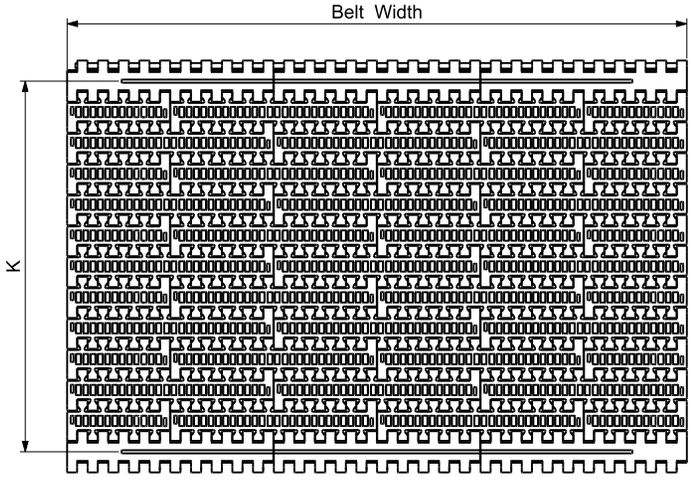

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


2) Indent (see configuration examples below): the flight indent (N) is the distance between the edge of the belt and the edge of the flight.

It is required to support the belt on its return ways and to hold it down during back flexing.
Standard indent (N) values:
- No side indent
- 45 mm (1.772")

3) N. of Notches and dimension (see configuration examples below): the notch (G) is a gap in each row of flights, longitudinally aligned, to allow supporting the belts on their return ways or in backflexing applications.
The distance (D) is the notch distance from the belt edge.

4) N. of Notches available:
- N. 1 notch in the centre
- N. 2 symmetrical notches
- N. 3 symmetrical notches

The belt can be also supplied without notches.
Standard gap (G) values:
- 45 mm (1.772")

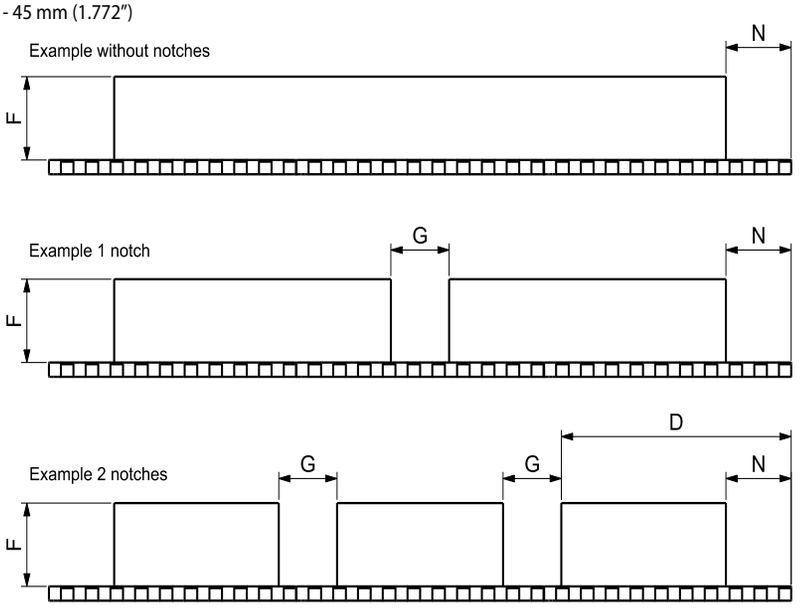

CATALOGUE REFERENCE


Use the checklist below to select the correct belt version according to the application needs. Check boxes and fill-in the required values, then contact REGINA Sales Department.

SERIES: 1500 (Flush grid surface)

MATERIAL: Polypropylene PP (grey)

Belt Width (W)	☐	(multiples of 85 mm increments)
Flight height (F)	☐	1" (25,4 mm)
	☐	2" (50,8 mm)
	☐	3" (76,2 mm)
	☐	(special value less than 3" on request)
Flights pitch (K)	☐	(flights row every.. th belt row)
Side indent (N)	☐	No side indent
	☐	45 mm (1.771") indent
	☐	(special value on request)
N. of notches	☐	No notch
	☐	1 notch in the centre
	☐	2 symmetrical notches
	☐	3 symmetrical notches
Notch width (G)	☐	45 mm (1.771")
	☐	(special value on request)
Notch distance (D)	☐	


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

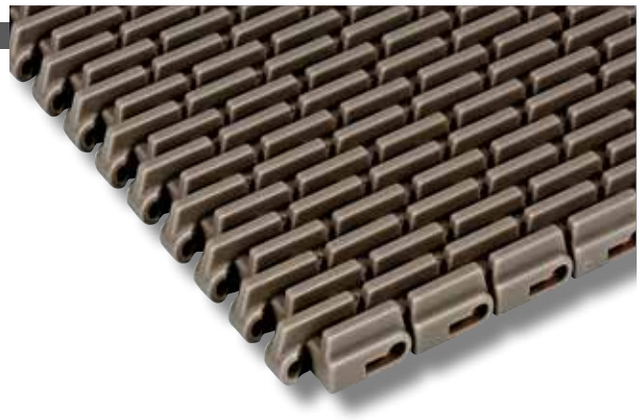


8,7 mm (0.343") THICKNESS
RAISED RIB

This belt allows smooth head transfer of the products, thanks to the optimized ratio rib thickness / spacing and the special click-combs.
Particularly suitable for products infeed of packaging machines.

- **Belt widths:** 170 mm (6.69") or wider in 85 mm (3.34") increments
- **Working Load (at 25°C/77°F):** 21600 N/m (1,480 lbs/ft)
- **Belt weight:** 9,62 kg/m² (1.97 lbs/ft²)

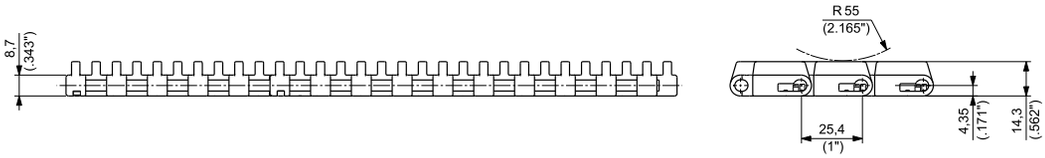

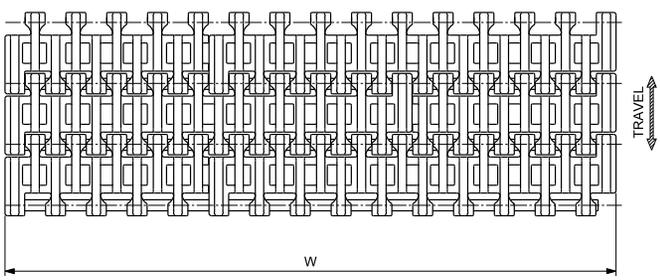

Materials see page 14
Combs see page 208
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS	
		Module	Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®	
mm	inch	PART NUMBER	
170	6.69	**RR1500BUP0170**	POLYPROPYLENE
255	10.04	**RR1500BUP0255**	
340	13.39	**RR1500BUP0340**	
425	16.73	**RR1500BUP0425**	
510	20.08	**RR1500BUP0510**	
595	23.43	**RR1500BUP0595**	
680	26.77	**RR1500BUP0680**	
765	30.12	**RR1500BUP0765**	
850	33.46	**RR1500BUP0850**	
935	36.81	**RR1500BUP0935**	
1020	40.16	**RR1500BUP1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm), the PN for UP material is "RR1500BUP1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TRANSFER COMBS




The comb is click-fitted on the omega style profile without using any fastening screws.

MATERIALS		
COMBS:	DG	ACETAL RESIN
PROFILE:	SS	STAINLESS STEEL

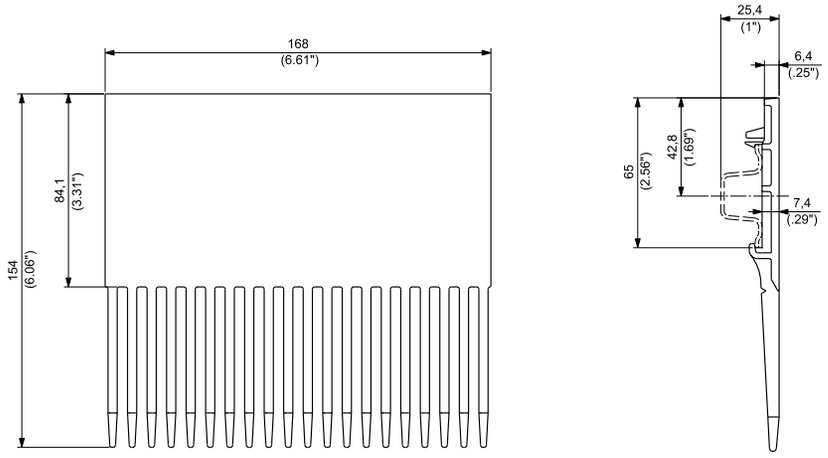

PART NUMBER **TC1500-01**

OMEGA STYLE PROFILE

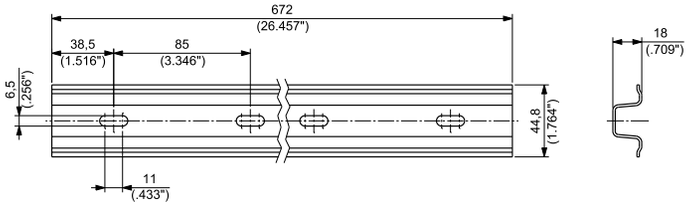

PART NUMBER **PRT-RR1500-0672**

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE - FULL COVER


This belts is specifically designed for handling shrink wrapped packs, boxes, plastic trays and other type of containers in incline, decline or timing applications.
The rubberized area is maximized to provide outstanding gripping capabilities on the conveyed products.

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (959 lbs/ft) for ULF material
  13200 N/m (904 lbs/ft) for PP material
- **Belt weight:** 9,05 kg/m² (1.85 lbs/ft²) for ULF material
  6,84 kg/m² (1.40 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

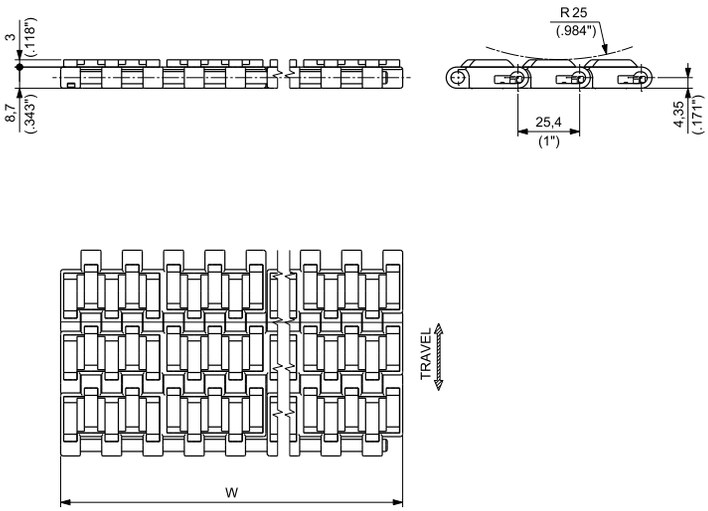

VERSION WITH TRACKING GUIDE

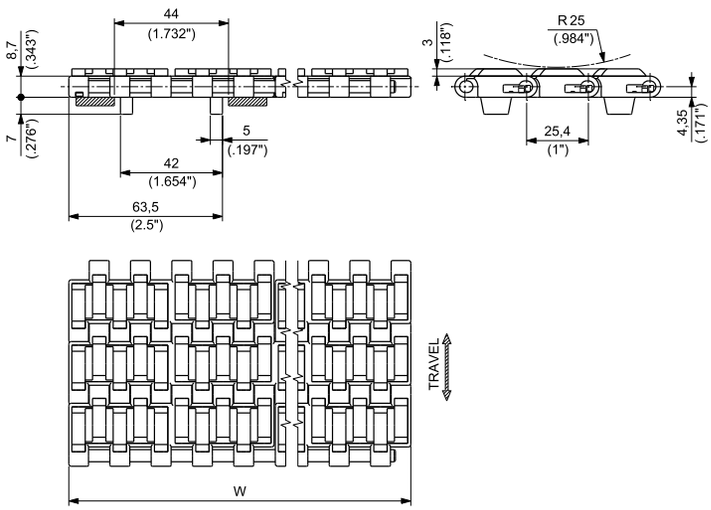

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS					
		Module				Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN		PP SPECIAL POLYPROPYLENE(1)			
		PART NUMBER		PART NUMBER			
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE		
85	3.35	**HF1600ULF0085**	**HF1600GULF0085**	**HF1600APP0085**	**HF1600AGPP0085**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
170	6.69	**HF1600ULF0170**	**HF1600G1ULF0170**	**HF1600APP0170**	**HF1600AG1PP0170**		
255	10.04	**HF1600ULF0255**	**HF1600G1ULF0255**	**HF1600APP0255**	**HF1600AG1PP0255**		
340	13.39	**HF1600ULF0340**	**HF1600G1ULF0340**	**HF1600APP0340**	**HF1600AG1PP0340**		
425	16.73	**HF1600ULF0425**	**HF1600G1ULF0425**	**HF1600APP0425**	**HF1600AG1PP0425**		
510	20.08	**HF1600ULF0510**	**HF1600G1ULF0510**	**HF1600APP0510**	**HF1600AG1PP0510**		
595	23.43	**HF1600ULF0595**	**HF1600G1ULF0595**	**HF1600APP0595**	**HF1600AG1PP0595**		
680	26.77	**HF1600ULF0680**	**HF1600G1ULF0680**	**HF1600APP0680**	**HF1600AG1PP0680**		
756	30.12	**HF1600ULF0765**	**HF1600G1ULF0765**	**HF1600APP0765**	**HF1600AG1PP0765**		
850	33.46	**HF1600ULF0850**	**HF1600G1ULF0850**	**HF1600APP0850**	**HF1600AG1PP0850**		
935	36.81	**HF1600ULF0935**	**HF1600G1ULF0935**	**HF1600APP0935**	**HF1600AG1PP0935**		
1020	40.16	**HF1600ULF1020**	**HF1600G1ULF1020**	**HF1600APP1020**	**HF1600AG1PP1020**		

(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for ULF material is "HF1600ULF1105".

Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE - SIDE INDENT


The belt is specifically designed for handling shrink wrapped packs, boxes, plastic trayes and other types of containers in incline, decline or timing applications.

- **Belt widths:** 255 mm (10.04") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 14000 N/m (959 lbs/ft) for ULF material
  13200 N/m (904 lbs/ft) for PP material
- **Belt weight:** 8,91 kg/m² (1.82 lbs/ft²) for ULF material
  6,71 kg/m² (1.37 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

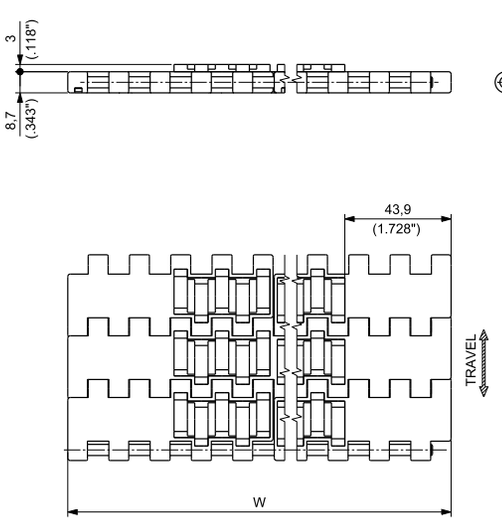

VERSION WITH TRACKING GUIDE

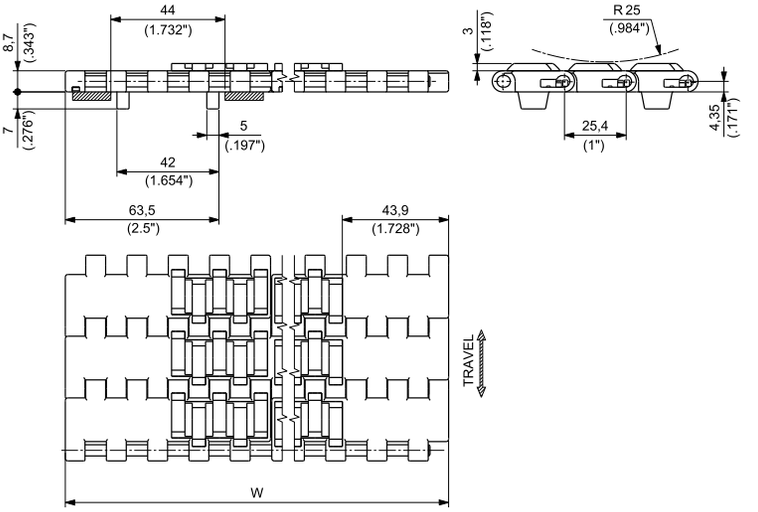

Materials see page 14
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS					
		Module				Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN		PP SPECIAL POLYPROPYLENE (1)			
		PART NUMBER		PART NUMBER			
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE		
255	10.04	**HFS1600ULF0255**	**HFS1600G1ULF0255**	**HFS1600APP0255**	**HFS1600AG1PP0255**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
340	13.39	**HFS1600ULF0340**	**HFS1600G1ULF0340**	**HFS1600APP0340**	**HFS1600AG1PP0340**		
425	16.73	**HFS1600ULF0425**	**HFS1600G1ULF0425**	**HFS1600APP0425**	**HFS1600AG1PP0425**		
510	20.08	**HFS1600ULF0510**	**HFS1600G1ULF0510**	**HFS1600APP0510**	**HFS1600AG1PP0510**		
595	23.43	**HFS1600ULF0595**	**HFS1600G1ULF0595**	**HFS1600APP0595**	**HFS1600AG1PP0595**		
680	26.77	**HFS1600ULF0680**	**HFS1600G1ULF0680**	**HFS1600APP0680**	**HFS1600AG1PP0680**		
765	30.12	**HFS1600ULF0765**	**HFS1600G1ULF0765**	**HFS1600APP0765**	**HFS1600AG1PP0765**		
850	33.46	**HFS1600ULF0850**	**HFS1600G1ULF0850**	**HFS1600APP0850**	**HFS1600AG1PP0850**		
935	36.81	**HFS1600ULF0935**	**HFS1600G1ULF0935**	**HFS1600APP0935**	**HFS1600AG1PP0935**		
1020	40.16	**HFS1600ULF1020**	**HFS1600G1ULF1020**	**HFS1600APP1020**	**HFS1600AG1PP1020**		

(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH


Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for ULF material is "HFS1600ULF1105".


Standard packaging:
Belt widths ≤ 1020 mm (40.16") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
RAISED RIB

The ideal ratio rib thickness/spacing offers high support even for the most unstable products, such as PET bottles with petaloid bottom, cans, 3-piece cans.
Optimum liquid drainage and good mechanical strength.

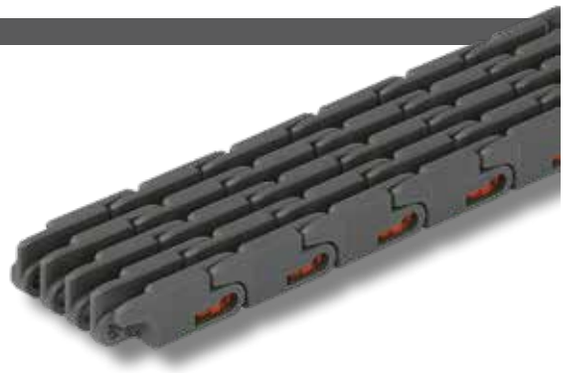

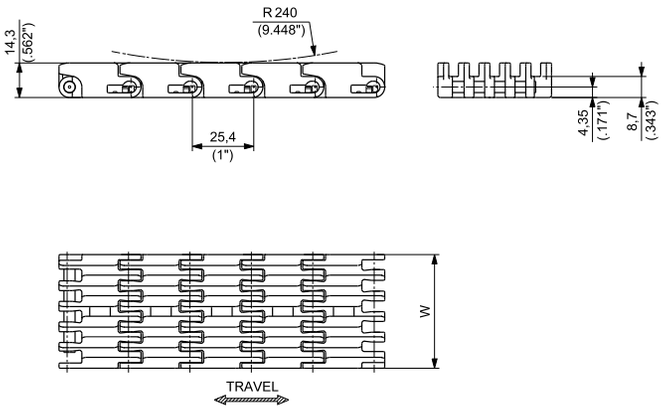

Materials see page 14
Combs see page 212
Sprockets see pages 215÷221
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	PBT	RR1600A UP K 30	R1600AUPKMA/000	30,0	1.18	8,7	0.343	700	157	0,39	0.26
		RR1600A UP K 38,5	R1600AUPKMB/000	38,5	1.52	8,7	0.343	950	214	0,49	0.33
		RR1600A UP K 47	R1600AUPKNB/000	47,0	1.85	8,7	0.343	1150	259	0,60	0.40
		RR1600A UP K 58	R1600AUPKPB/000	58,0	2.28	8,7	0.343	1400	315	0,75	0.50
SPECIAL POLYPROPYLENE[1] **PP**		RR1600A PP K 30	R1600APPKMA/000	30,0	1.18	8,7	0.343	700	157	0,26	0.17
		RR1600A PP K 38,5	R1600APPKMB/000	38,5	1.52	8,7	0.343	950	214	0,33	0.22
		RR1600A PP K 47	R1600APPKNB/000	47,0	1.85	8,7	0.343	1150	259	0,40	0.27
		RR1600A PP K 58	R1600APPKPB/000	58,0	2.28	8,7	0.343	1400	315	0,49	0.33

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TRANSFER COMBS




Combs are supplied with slot covers but without fastening screws.
One fastening screw is required for each comb.
It can be ordered using P/N 16300020.

MATERIALS		
COMBS:	DG	ACETAL RESIN
SCREWS*:	SS	STAINLESS STEEL


*Screws are not included in the combs.

COMB FOR K 58 CHAIN

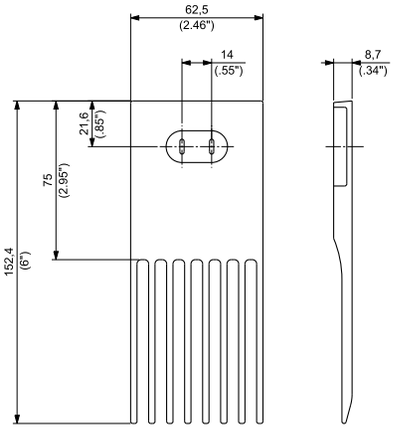


PART NUMBER **TC1600-01**

COMB FOR K 47 CHAIN

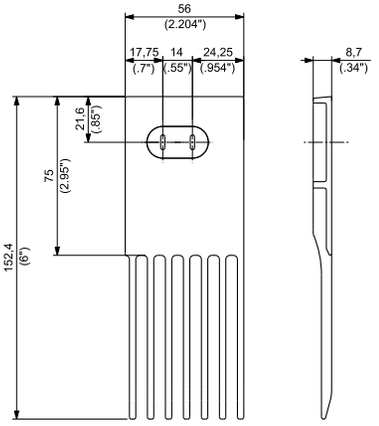


PART NUMBER **TC1600-02**




PART NUMBER **16300020**

COMB FOR K 38,5 CHAIN

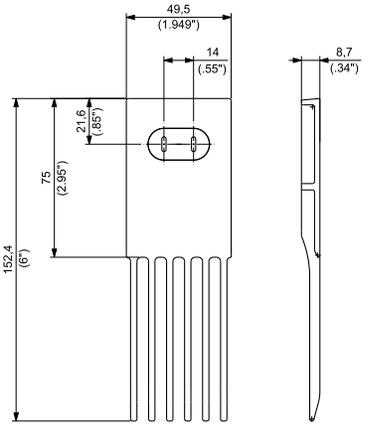

PART NUMBER **TC1600-03**

COMB FOR K 30 CHAIN

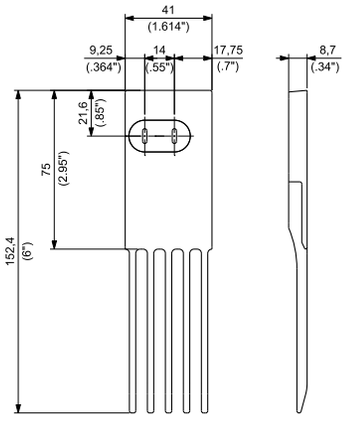

PART NUMBER **TC1600-04**


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


9,6 mm (0.378") THICKNESS
RAISED RIB



This belt allows the head transfer of the products by using transfer combs and has a open area to allow liquid drainage and belt cleaning.
Particularly suitable for product infeed of packaging machines.

- **Belt widths:** 152,4 mm (6") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 21580 N/m (1,480 lbs/ft) for UP material
  10920 N/m (748 lbs/ft) for PP material
- **Belt weight: :** 9,27 kg/m² (1.90 lbs/ft²) for UP material
  6,16 kg/m² (1.26 lbs/ft²) for PP material

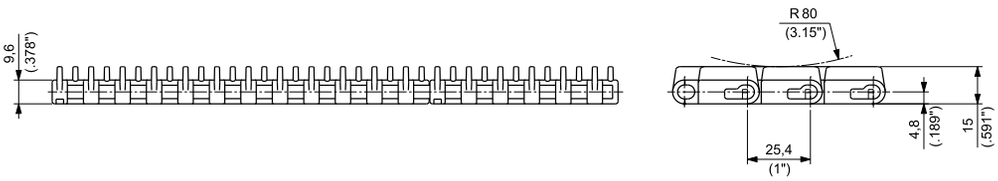

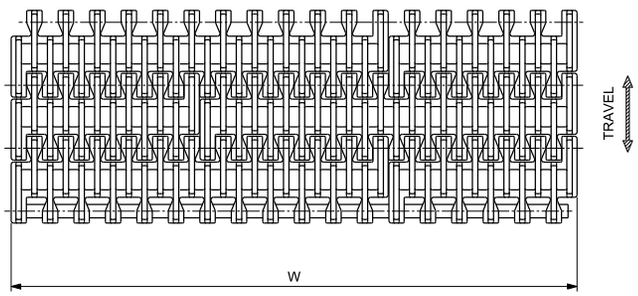

Materials see page 14
Combs see page 214
Sprockets see pages 215÷221
Applications see page 24

WIDTH W		MATERIALS		
		Module		Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®	PP SPECIAL POLYPROPYLENE[1]	
mm	inch	PART NUMBER	PART NUMBER	
152,4	6	**1110UP006**	**1110PP006**	POLYPROPYLENE
228,6	9	**1110UP009**	**1110PP009**	
304,8	12	**1110UP012**	**1110PP012**	
381,0	15	**1110UP015**	**1110PP015**	
457,2	18	**1110UP018**	**1110PP018**	
533,4	21	**1110UP021**	**1110PP021**	
609,6	24	**1110UP024**	**1110PP024**	
685,8	27	**1110UP027**	**1110PP027**	
762,0	30	**1110UP030**	**1110PP030**	
838,2	33	**1110UP033**	**1110PP033**	
914,4	36	**1110UP036**	**1110PP036**	
990,6	39	**1110UP039**	**1110PP039**	
1066,8	42	**1110UP042**	**1110PP042**	
1143,0	45	**1110UP045**	**1110PP045**	
1219,2	48	**1110UP048**	**1110PP048**	
1295,4	51	**1110UP051**	**1110PP051**	
1371,6	54	**1110UP054**	**1110PP054**	
1447,8	57	**1110UP057**	**1110PP057**	
1524,0	60	**1110UP060**	**1110PP060**	

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1524 mm (60") are available in 76,2 mm (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 63" wide belt (=60+3 inches), the PN for PP material is "1110PP063".[1]

Standard packaging:
Belts are supplied in the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




TRANSFER COMBS

Combs are supplied with slot covers but without fastening screws.
Two fastening screws are required for each comb.
They can be ordered using P/N 16300020.


Special note: the comb fastening screws for 1110 belts are not interchangeable with fastening screws for 3135 belts.

MATERIALS		
COMBS:	DG	ACETAL RESIN
SCREWS*:	SS	STAINLESS STEEL


*Screws are not included in the combs.

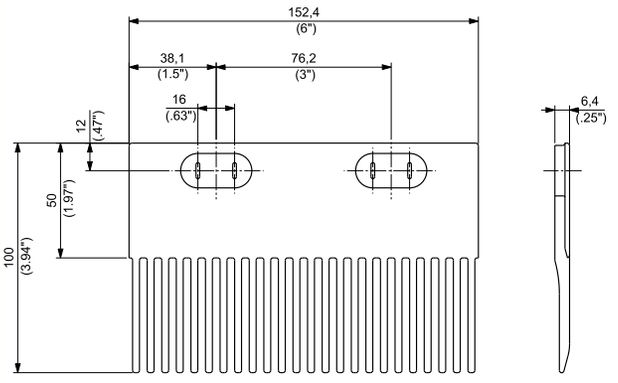

PART NUMBER **TC1110-01**

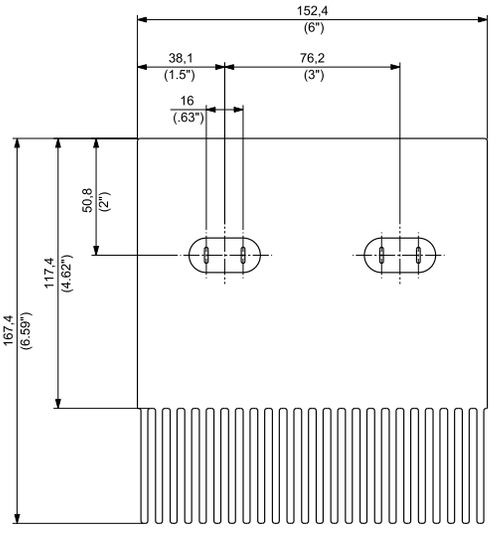

PART NUMBER **TC1110-02**

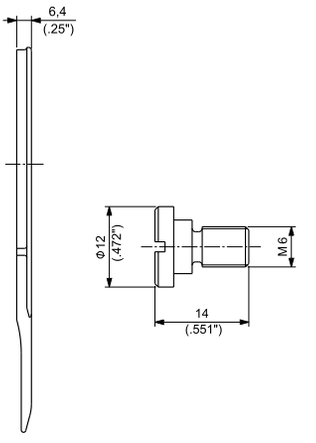

PART NUMBER **16300020**

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS	
SPROCKETS:	**PGF** REINFORCED POLYAMIDE



8T & 12T SPROCKETS

(for 13T , 18T, 19T & 21T see next pages)

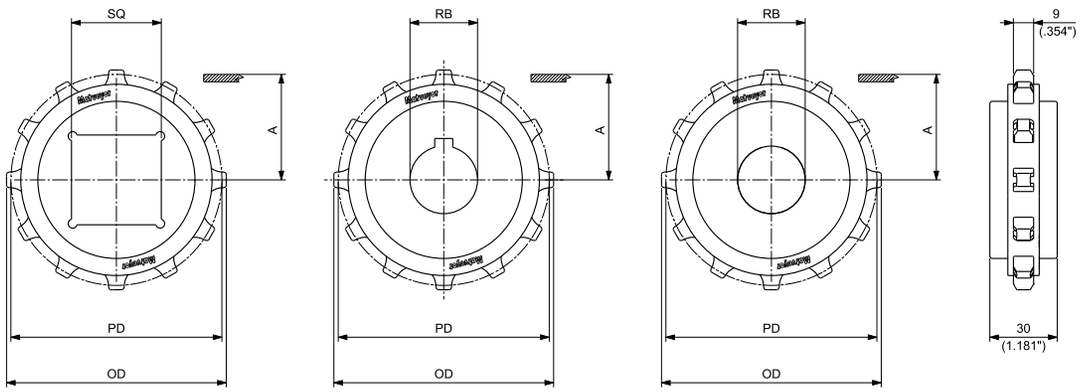

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

NOTE: FOR 8T SPROCKET, THE HUB WIDTH IS 25 mm (0.984")

MOULDED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
8	66,37	2.613	64,50	2.539	28,80	1.134	20			**MPBT10100820**	**MPBF10100820**	0,05	0.11
							25			**MPBT10100825**	**MPBF10100825**	0,04	0.10
							30			**MPBT10100830**	**MPBF10100830**	0,04	0.08
								1¼		MPBT101008254	MPBF101008254	0,04	0.10
								1½		MPBT101008317	MPBF101008317	0,03	0.07
12	98,14	3.864	97,90	3.854	44,70	1.760	30			**MPBT10101230**	**MPBF10101230**	0,14	0.30
							35			**MPBT10101235**	**MPBF10101235**	0,13	0.28
							40		**MPBQ10101240**	**MPBT10101240**	**MPBF10101240**	0,12	0.27
								1 3/16		MPBT101012301	MPBF101012301	0,14	0.30
								1 7/16		MPBT101012365	MPBF101012365	0,12	0.27
								1½		MPBT101012381	MPBF101012381	0,12	0.26

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS	
SPROCKETS:	PGF REINFORCED POLYAMIDE




13T & 18T SPROCKETS


(for 19T & 21T see next page, for 8T & 12T see previous page)

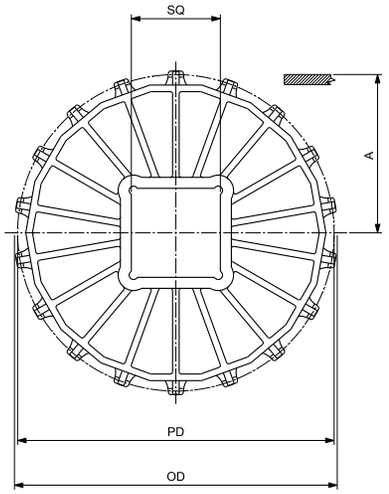

SQUARE BORE - DRIVE/IDLER

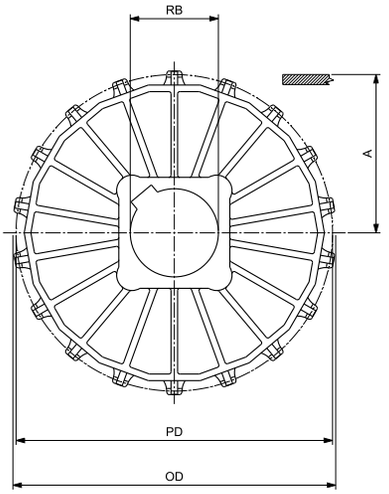

ROUND BORE - DRIVE

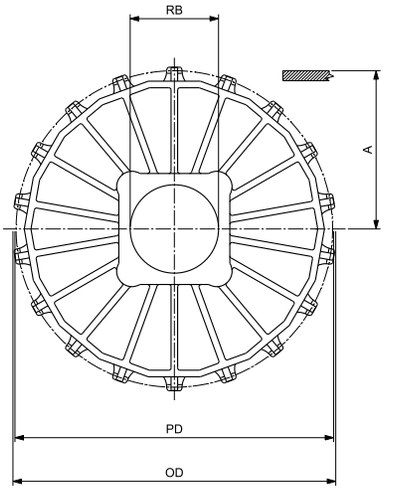

ROUND BORE - IDLER

MOULDED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
13	106,14	4.179	106,20	4.181	48,70	1.917	30			**MPBT10101330**	**MPBF10101330**	0,17	0.38
							35			**MPBT10101335**	**MPBF10101335**	0,15	0.33
							40		**MPBQ10101340**	**MPBT10101340**	**MPBF10101340**	0,16	0.36
								1 3/16		**MPBT101013301**	**MPBF101013301**	0,17	0.38
								1 7/16		**MPBT101013365**	**MPBF101013365**	0,16	0.35
								1½	**MPBQ10101381**	**MPBT101013381**	**MPBF101013381**	0,15	0.34
18	146,27	5.759	147,20	5.795	68,80	2.709	30			**MPBT10101830**	**MPBF10101830**	0,19	0.41
							35			**MPBT10101835**	**MPBF10101835**	0,21	0.47
							40		**MPBQ10101840**	**MPBT10101840**	**MPBF10101840**	0,20	0.44
							60		**MPBQ10101860**			0,16	0.36
								1 3/16		**MPBT101018301**		0,21	0.46
								1 7/16		**MPBT101018365**	**MPBF101018365**	0,20	0.43
								1½		**MPBT101018381**	**MPBF101018381**	0,19	0.42

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS	
SPROCKETS:	PGF REINFORCED POLYAMIDE




19T & 21T SPROCKETS


(for 8T, 12T, 13T & 18T see previous pages)

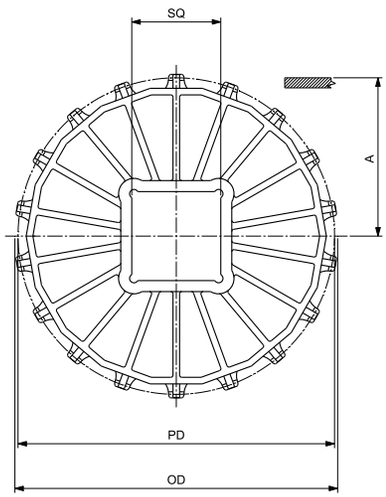


SQUARE BORE - DRIVE/IDLER

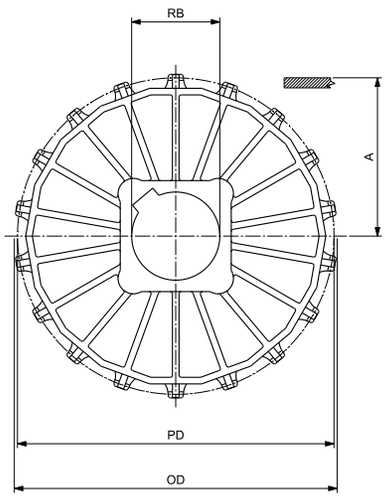

ROUND BORE - DRIVE

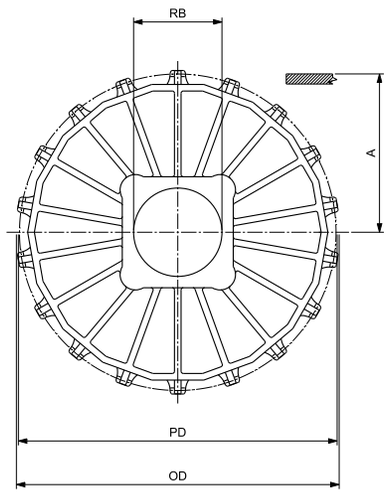

ROUND BORE - IDLER



MOULDED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBT10101930**	**MPBF10101930**	0,18	0.41
							35			**MPBT10101935**	**MPBF10101935**	0,17	0.38
							40		**MPBQ10101940**	**MPBT10101940**	**MPBF10101940**	0,16	0.35
							50			**MPBT10101950**	**MPBF10101950**	0,19	0.42
							60		**MPBQ10101960**	**MPBT10101960**	**MPBF10101960**	0,15	0.34
19	154,32	6.076	155,30	6.114	72,80	2.866	65		**MPBQ10101965**			0,17	0.37
								1		**MPBT101019254**	**MPBF101019254**	0,19	0.43
								1 3/16		**MPBT101019301**	**MPBF101019301**	0,18	0.41
								1 7/16		**MPBT101019365**	**MPBF101019365**	0,17	0.37
								1 1/2	**MPBQ101019381**	**MPBT101019381**	**MPBF101019381**	0,17	0.36
								2 1/2	**MPBQ101019635**			0,17	0.37
							30			**MPBT10102130**	**MPBF10102130**	0,27	0.59
							35			**MPBT10102135**	**MPBF10102135**	0,26	0.57
							40		**MPBQ10102140**	**MPBT10102140**	**MPBF10102140**	0,25	0.54
21	170,42	6.709	171,60	6.756	80,90	3.185	50			**MPBT10102150**	**MPBF10102150**	0,29	0.64
							60		**MPBQ10102160**			0,22	0.49
								1 3/16		**MPBT101021301**	**MPBF101021301**	0,27	0.59
								1 7/16		**MPBT101021365**	**MPBF101021365**	0,25	0.56
								1 1/2	**MPBQ101021381**	**MPBT101021381**	**MPBF101021381**	0,25	0.55

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE



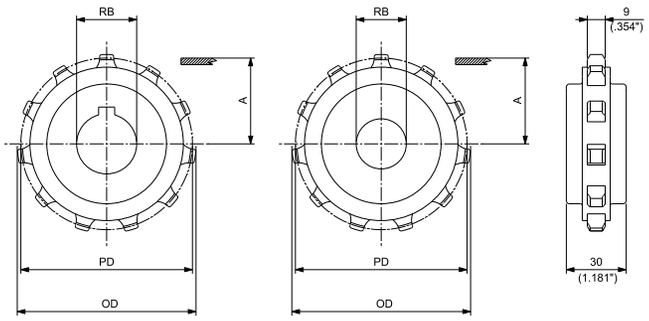

ROUND BORE - DRIVE

ROUND BORE - IDLER

MACHINED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
10	82,20	3.236	81,30	3.201	36,70	1.445	25		**MPBAT10101025**	**MPBAF10101025**	0,09	0.19
							30		**MPBAT10101030**	**MPBAF10101030**	0,08	0.18
								1	**MPBAT101010254**	**MPBAF101010254**	0,09	0.19
								1¼	**MPBAT101010317**	**MPBAF101010317**	0,08	0.17
								1½	**MPBAT101010381**	**MPBAF101010381**	0,07	0.14
11	90,16	3.550	89,60	3.528	40,70	1.602	25		**MPBAT10101125**	**MPBAF10101125**	0,11	0.25
							30		**MPBAT10101130**	**MPBAF10101130**	0,11	0.23
								1	**MPBAT101011254**	**MPBAF101011254**	0,11	0.25
								1¼	**MPBAT101011317**	**MPBAF101011317**	0,10	0.23
								1½	**MPBAT101011381**	**MPBAF101011381**	0,09	0.20

*Diameter is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+NC	ZINC PLATED STEEL




16T & 18T SPROCKETS


(for 19T & 20T see next page)

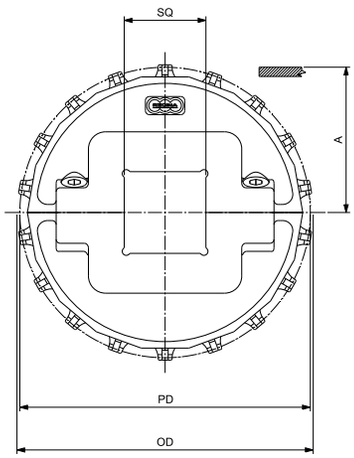

SQUARE BORE - DRIVE/IDLER

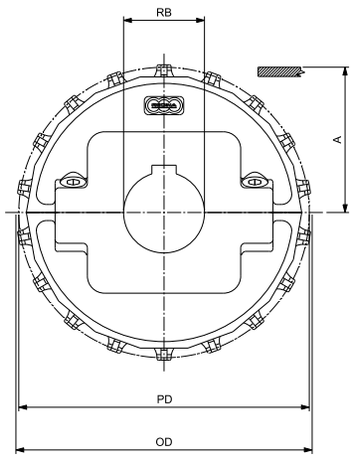

ROUND BORE - DRIVE

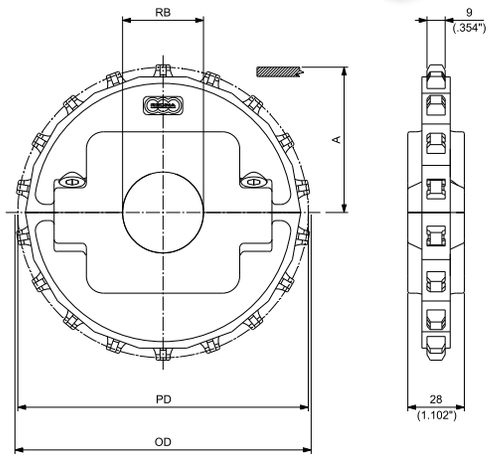

ROUND BORE - IDLER

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBST10101630**	**MPBSF10101630**	0,27	0.59
							35			**MPBST10101635**	**MPBSF10101635**	0,26	0.58
							40		**MPBSQ10101640**	**MPBST10101640**	**MPBSF10101640**	0,25	0.56
							45			**MPBST10101645**	**MPBSF10101645**	0,25	0.54
							50		**MPBSQ10101650**	**MPBST10101650**	**MPBSF10101650**	0,24	0.52
16	130,20	5.126	130,10	5.122	60,70	2.390	60		**MPBSQ10101660**			0,19	0.42
								1		MPBST101016254	MPBSF101016254	0,27	0.61
								1 3/16		MPBST101016301	MPBSF101016301	0,27	0.59
								1 1/4		MPBST101016317	MPBSF101016317	0,27	0.59
								1 7/16		MPBST101016365	MPBSF101016365	0,26	0.57
								1 1/2	MPBSQ101016381	MPBST101016381	MPBSF101016381	0,26	0.57
							30			**MPBST10101830**	**MPBSF10101830**	0,32	0.71
							35			**MPBST10101835**	**MPBSF10101835**	0,32	0.70
							40		**MPBSQ10101840**	**MPBST10101840**	**MPBSF10101840**	0,31	0.68
							45			**MPBST10101845**	**MPBSF10101845**	0,30	0.66
							50		**MPBSQ10101850**	**MPBST10101850**	**MPBSF10101850**	0,29	0.64
18	146,27	5.759	146,50	5.768	68,80	2.709	60		**MPBSQ10101860**	**MPBST10101860**	**MPBSF10101860**	0,27	0.59
								1		MPBST101018254	MPBSF101018254	0,33	0.72
								1 3/16		MPBST101018301	MPBSF101018301	0,32	0.71
								1 1/4		MPBST101018317	MPBSF101018317	0,32	0.71
								1 7/16		MPBST101018365	MPBSF101018365	0,31	0.69
								1 1/2	MPBSQ101018381	MPBST101018381	MPBSF101018381	0,31	0.69
								2		MPBST101018508	MPBSF101018508	0,29	0.63

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+NC	ZINC PLATED STEEL




19T & 20T SPROCKETS


(for 16T & 18T see previous page)

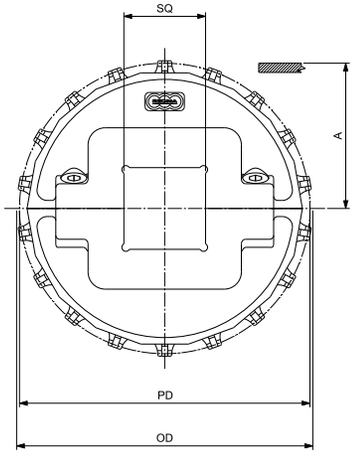

SQUARE BORE - DRIVE/IDLER

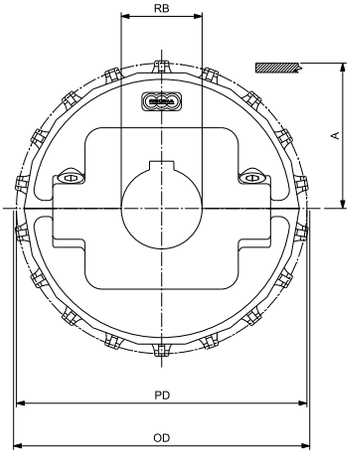

ROUND BORE - DRIVE

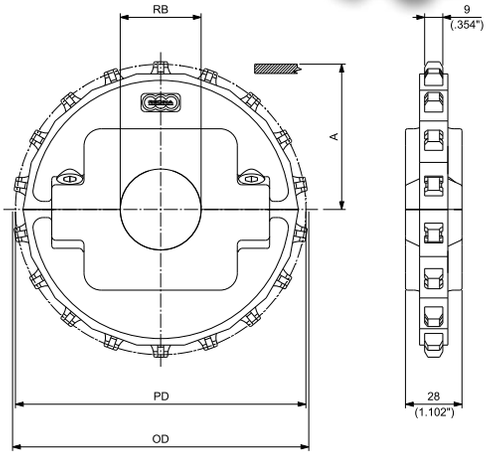

ROUND BORE - IDLER

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBST10101930**	**MPBSF10101930**	0,33	0.72
							35			**MPBST10101935**	**MPBSF10101935**	0,32	0.71
							40		**MPBSQ10101940**	**MPBST10101940**	**MPBSF10101940**	0,31	0.69
							45			**MPBST10101945**	**MPBSF10101945**	0,30	0.67
							50		**MPBSQ10101950**	**MPBST10101950**	**MPBSF10101950**	0,30	0.65
19	154,32	6.076	154,60	6.087	72,80	2.866	60		**MPBSQ10101960**	**MPBST10101960**	**MPBSF10101960**	0,27	0.61
								1		MPBST101019254	MPBSF101019254	0,35	0.77
								1 3/16		MPBST101019301	MPBSF101019301	0,33	0.72
								1 1/4		MPBST101019317	MPBSF101019317	0,32	0.71
								1 7/16		MPBST101019365	MPBSF101019365	0,32	0.70
								1 1/2	MPBSQ101019381	MPBST101019381	MPBSF101019381	0,32	0.70
								2		MPBST101019508	MPBSF101019508	0,28	0.62
								2 1/2	MPBSQ101019635			0,25	0.54
							30			**MPBST10102030**	**MPBSF10102030**	0,35	0.78
							35			**MPBST10102035**	**MPBSF10102035**	0,35	0.77
							40		**MPBSQ10102040**	**MPBST10102040**	**MPBSF10102040**	0,34	0.75
							50			**MPBST10102050**	**MPBSF10102050**	0,32	0.71
							60		**MPBSQ10102060**	**MPBST10102060**	**MPBSF10102060**	0,30	0.66
							65		**MPBSQ10102065**			0,26	0.58
20	162,37	6.393	162,80	6.409	76,80	3.024		1		MPBST101020254	MPBSF101020254	0,36	0.79
								1 3/16		MPBST101020301	MPBSF101020301	0,35	0.78
								1 1/4		MPBST101020317	MPBSF101020317	0,35	0.78
								1 7/16		MPBST101020365	MPBSF101020365	0,35	0.76
								1 1/2	MPBSQ101020381	MPBST101020381	MPBSF101020381	0,34	0.76
								2		MPBST101020508	MPBSF101020508	0,32	0.71
								2 1/2	MPBSQ101020635			0,27	0.59

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **1500 / 1501**
- **1600**
- **HF 1600**
- **HFS 1600**
- **RR 1500**
- **RR 1600**
- **1110**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



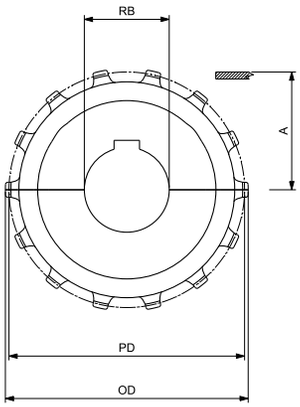

ROUND BORE - DRIVE

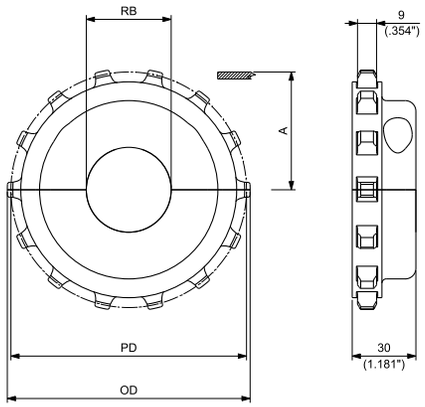

ROUND BORE - IDLER



MOULDED SOLID IDLER WHEELS
See page 124



MOULDED SPLIT IDLER WHEELS
SEE PAGE 195



MACHINED SPLIT IDLER WHEELS
See page 126

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
							25		**MPBAST10101425**	**MPBASF10101425**	0,26	0.57
							30		**MPBAST10101430**	**MPBASF10101430**	0,25	0.55
							35		**MPBAST10101435**	**MPBASF10101435**	0,24	0.53
							40		**MPBAST10101440**	**MPBASF10101440**	0,23	0.51
14	114,15	4.494	114,40	4.504	52,70	2.075		1	**MPBAST101014254**	**MPBASF101014254**	0,26	0.56
								1 3/16	**MPBAST101014301**	**MPBASF101014301**	0,25	0.55
								1 1/4	**MPBAST101014317**	**MPBASF101014317**	0,25	0.54
								1 7/16	**MPBAST101014365**	**MPBASF101014365**	0,24	0.52
								1 1/2	**MPBAST101014381**	**MPBASF101014381**	0,23	0.52

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

¾" Pitch Medium Duty Belts and Chains



INDUSTRIES AND APPLICATIONS

Suitable for handling loose & packaged products, such as plastic & glass bottles and aluminium & steel cans, in medium duty applications.

INDUSTRIES

Bottling and canning
Food filling
Container manufacturing
Pharmaceutical
Paper/cardboard
Consumer goods

APPLICATIONS

Depalletizer
Pressureless Inliners and Combiners
Single lane & mass conveyors
Accumulation tables
Infeed packaging machines
Case conveyors
Palletizers

FEATURES

- Smooth and uniform top surface, thanks to location of retention clip underneath modules and reduced gaps between hinges.



- Maximized bottom sliding surface to guarantee limited wear.
- The optimized design and location of retention clip, which can be easily rotated from both the bottom and the side of the belt, results in an easy belt assembly and disassembly.



SIDE



BOTTOM


- The belts can be used on conveyors side by side with Magnetic or TAB sideflexing chains 782 or 783 series allowing a smooth products transfer between straight running and sideflexing conveyors.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

8,7 mm (0.343") THICKNESS
SOLID TOP


DUPONT® KEVLAR® INSIDE

e-F.A.S.T. ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

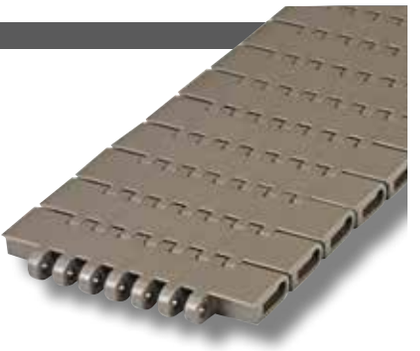


Extremely good flatness, manufacturing accuracy, and low coefficient of friction, make the side transfer of the products very easy.
Completely closed surface, no gap between the modules, even when engaging on the sprockets.
Particularly suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base).

VERSION WITHOUT TRACKING GUIDE

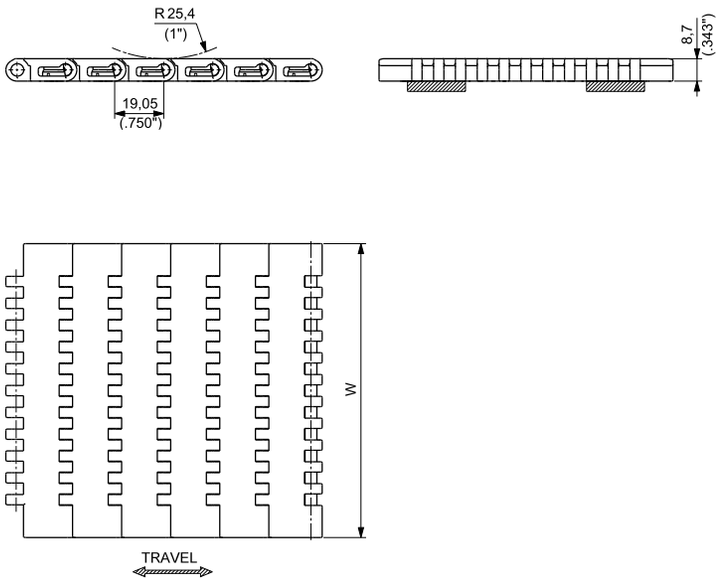

VERSION WITH TRACKING GUIDE

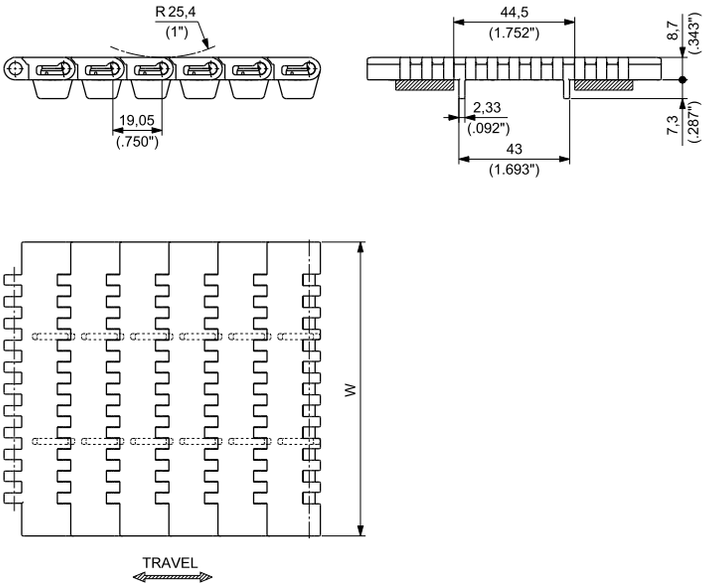


Materials see page 14
Sprockets see pages 229÷231
Applications see page 24

MATERIALS Plate	MATERIALS Pin	VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP		WITHOUT TRACKING GUIDE	7300 UP 325	7300UPKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
			7300 UP 450	7300UPKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
			7300 UP 600	7300UPKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
			7300 UP 750	7300UPKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	PBT		7300 D2K 325	7300D2KKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
			7300 D2K 450	7300D2KKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
			7300 D2K 600	7300D2KKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
			7300 D2K 750	7300D2KKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.			7300 EF 325	7300EFKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
			7300 EF 450	7300EFKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
			7300 EF 600	7300EFKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
			7300 EF 750	7300EFKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP		WITH TRACKING GUIDE	7300G UP 325	7300GUPKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
			7300G UP 450	7300GUPKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
			7300G UP 600	7300GUPKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
			7300G UP 750	7300GUPKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	PBT		7300G D2K 325	7300GD2KKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
			7300G D2K 450	7300GD2KKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
			7300G D2K 600	7300GD2KKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
			7300G D2K 750	7300GD2KKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.			7300G EF 325	7300GEFKD/000	82,6	3.25	8,7	0.343	2300	517	0,84	0.57
			7300G EF 450	7300GEFKG/000	114,3	4.50	8,7	0.343	3290	740	1,15	0.77
			7300G EF 600	7300GEFKH/000	152,4	6.00	8,7	0.343	4370	982	1,51	1.01
			7300G EF 750	7300GEFKL/000	190,5	7.50	8,7	0.343	5450	1225	1,87	1.26

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

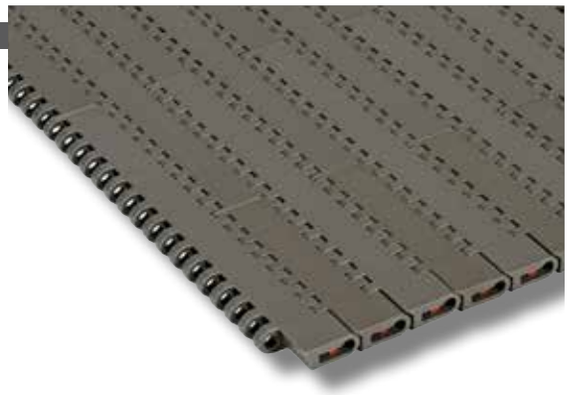

8,7 mm (0.343") THICKNESS
SOLID TOP


This belt offers a smooth surface to provide excellent support and minimize product tippage.
Particulary suitable for glass products, small sized products and unstable containers
(for example PET bottles with petaloid base).


- **Belt widths:** 228,6 mm (9") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 30000 N/m (2,056 lbs/ft) for UP, DK2™ and e-F.A.S.T.™ materials
- **Belt weight:** 9,36 kg/m² (1.92 lbs/ft²) for UP, DK2™ and e-F.A.S.T.™ materials

DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC





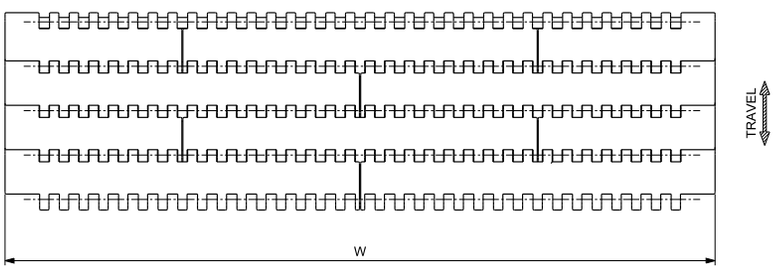

Materials see page 14

Sprockets see pages 229÷231

Applications see page 24

WIDTH W		MATERIALS			
		Module			Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®	DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®	NEW e-F.A.S.T.™ ECOLOGICAL FRICTION ABATING THERMOPLASTIC	
mm	inch	PART NUMBER	PART NUMBER		
228,6	9	**7300UP009**	**7300D2K009**	**7300EF009**	
304,8	12	**7300UP012**	**7300D2K012**	**7300EF012**	
381,0	15	**7300UP015**	**7300D2K015**	**7300EF015**	
457,2	18	**7300UP018**	**7300D2K018**	**7300EF018**	
533,4	21	**7300UP021**	**7300D2K021**	**7300EF021**	
609,6	24	**7300UP024**	**7300D2K024**	**7300EF024**	
685,8	27	**7300UP027**	**7300D2K027**	**7300EF027**	
762,0	30	**7300UP030**	**7300D2K030**	**7300EF030**	
838,2	33	**7300UP033**	**7300D2K033**	**7300EF033**	PBT
914,4	36	**7300UP036**	**7300D2K036**	**7300EF036**	
990,6	39	**7300UP039**	**7300D2K039**	**7300EF039**	
1066,8	42	**7300UP042**	**7300D2K042**	**7300EF042**	
1143,0	45	**7300UP045**	**7300D2K045**	**7300EF045**	
1219,2	48	**7300UP048**	**7300D2K048**	**7300EF048**	
1295,4	51	**7300UP051**	**7300D2K051**	**7300EF051**	
1371,6	54	**7300UP054**	**7300D2K054**	**7300EF054**	
1447,8	57	**7300UP057**	**7300D2K057**	**7300EF057**	
1524,0	60	**7300UP060**	**7300D2K060**	**7300EF060**	

Belts wider than 1524 mm (60") are available in 76,2 mm (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 63" wide belt (=60+3 inches) the PN for UP material is "7300UP063".


Standard packaging:
Belts are supplied in the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


ACTIVE TRANSFER MODULES 8,7 mm (0.343") THICKNESS SOLID TOP

DUPONT® KEVLAR® INSIDE


ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

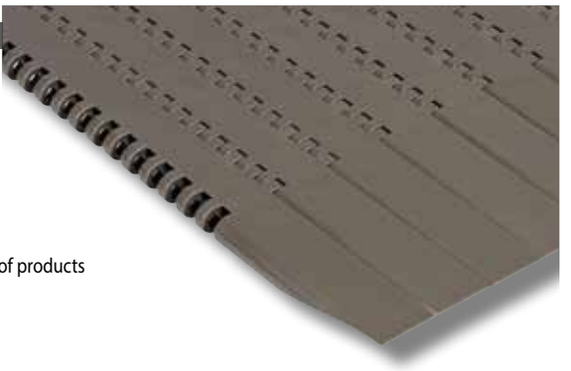

7300G ATM can be used in combination with 7300 modular belts. Active transfer modules 7300G ATM allow the transfer of products between two 90° conveyor tracks without using dead plates.
The special wing shaped module profile supports the products dynamically during transfer on the take-away belts.
Available left and right version.

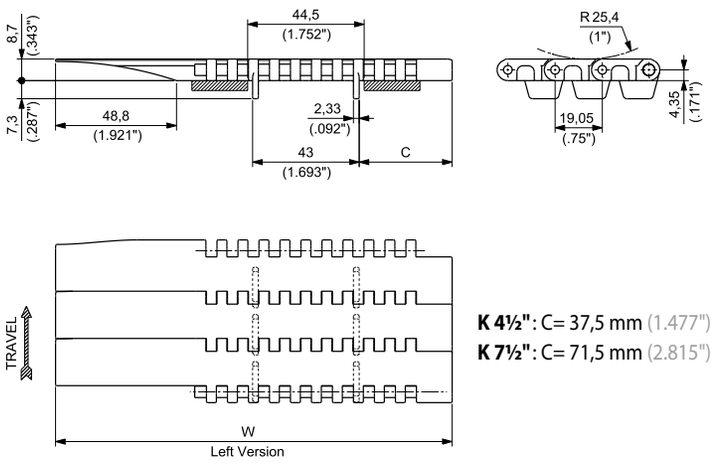

K 4½": C= 37,5 mm (1.477")
K 7½": C= 71,5 mm (2.815")

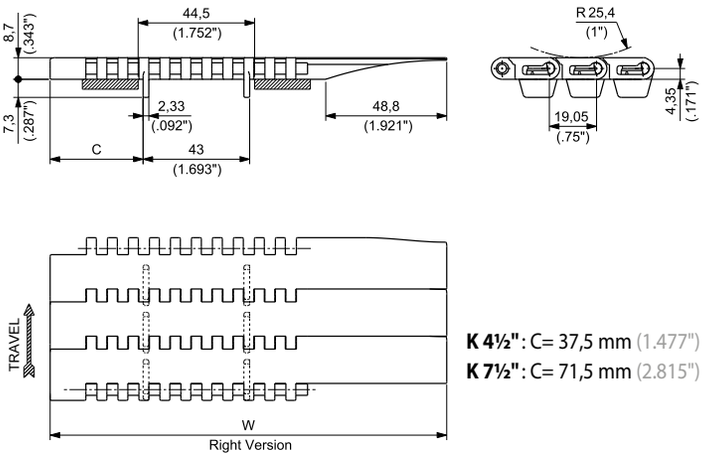

K 4½": C= 37,5 mm (1.477")
K 7½": C= 71,5 mm (2.815")

Materials see page 14
Sprockets see pages 229÷231
Applications see page 24

7300G ATM - Left Version

MATERIALS Plate	MATERIALS Pin	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	PBT	7300GATM UP 450 LH	7300GATMUP450LH	160,0	6.30	8,7	0.343	3290	740	1,28	0.86
		7300GATM UP 750 LH	7300GATMUP750LH	236,2	9.30	8,7	0.343	4370	982	1,99	1.34
SPECIAL DELRIN® REINFORCED WITH KEVLAR® DK2™		7300GATM D2K 450 LH	7300GATMD2K450LH	160,0	6.30	8,7	0.343	3290	740	1,28	0.86
		7300GATM D2K 750 LH	7300GATMD2K750LH	236,2	9.30	8,7	0.343	4370	982	1,99	1.34
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™		7300GATM EF 450 LH	7300GATMEF450LH	160,0	6.30	8,7	0.343	3290	740	1,28	0.86
		7300GATM EF 750 LH	7300GATMEF750LH	236,2	9.30	8,7	0.343	4370	982	1,99	1.34


7300G ATM - Right Version

MATERIALS Plate	MATERIALS Pin	ITEM DESCRIPTION	PART NUMBER	WIDTH W mm	WIDTH W inch	PLATE THICKNESS mm	PLATE THICKNESS inch	WORKING LOAD (25°C/77°F) N	WORKING LOAD (25°C/77°F) lbs	WEIGHT kg/m	WEIGHT lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	PBT	7300GATM UP 450 RH	7300GATMUP450RH	160,0	6.30	8,7	0.343	3290	740	1,28	0.86
		7300GATM UP 750 RH	7300GATMUP750RH	236,2	9.30	8,7	0.343	4370	982	1,99	1.34
SPECIAL DELRIN® REINFORCED WITH KEVLAR® DK2™		7300GATM D2K 450 RH	7300GATMD2K450RH	160,0	6.30	8,7	0.343	3290	740	1,28	0.86
		7300GATM D2K 750 RH	7300GATMD2K750RH	236,2	9.30	8,7	0.343	4370	982	1,99	1.34
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.™		7300GATM EF 450 RH	7300GATMEF450RH	160,0	6.30	8,7	0.343	3290	740	1,28	0.86
		7300GATM EF 750 RH	7300GATMEF750RH	236,2	9.30	8,7	0.343	4370	982	1,99	1.34

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


8,7 mm (0.343") THICKNESS
FLUSH GRID

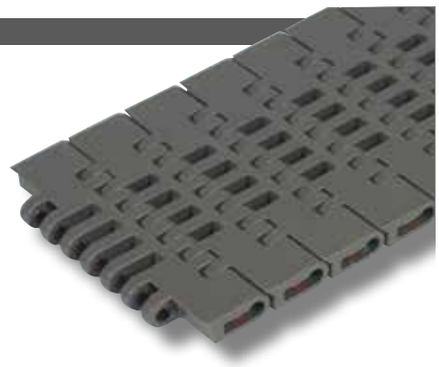


This belt has an excellent combination of open and support areas to allow drainage of liquids and good support of the conveyed product.
This belt is particularly suitable for conveying of aluminium cans.

DUPONT® KEVLAR® INSIDE

VERSION WITHOUT TRACKING GUIDE

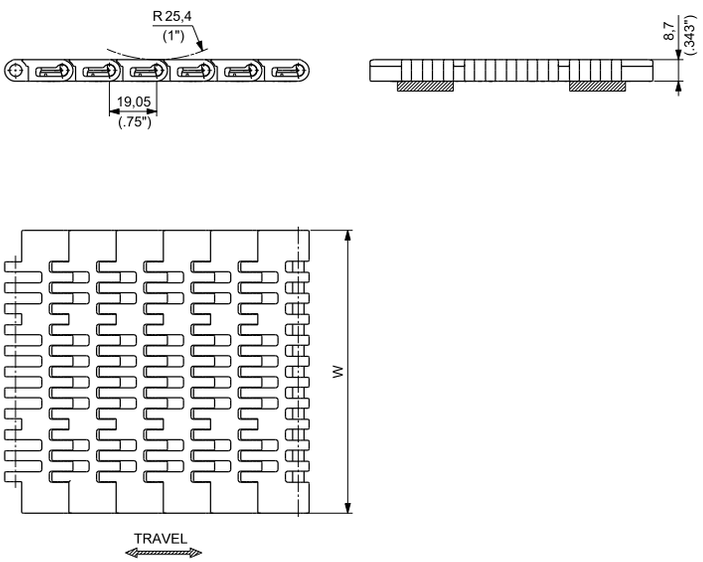

VERSION WITH TRACKING GUIDE

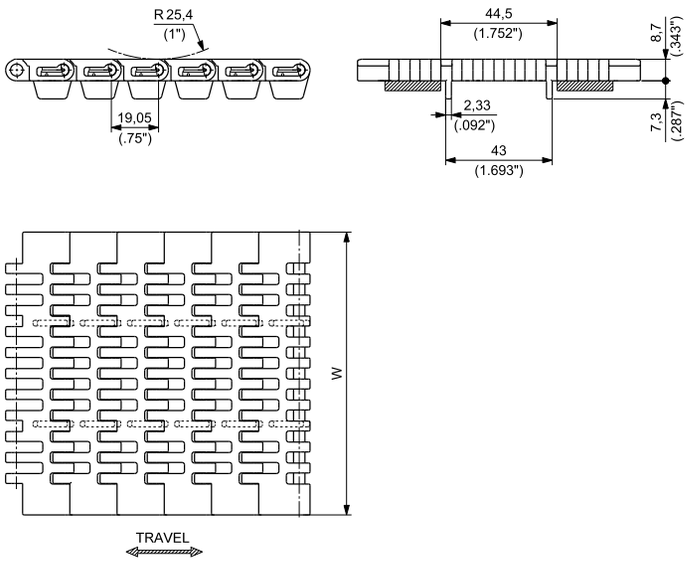


Materials see page 14
Sprockets see pages 229÷231
Applications see page 24

MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	WITHOUT TRACKING GUIDE	7200 UP 325	7200UPKD/000	82,6	3.25	8,7	0.343	2300	517	0,80	0.54
			7200 UP 450	7200UPKG/000	114,3	4.50	8,7	0.343	3290	740	1,08	0.72
			7200 UP 600	7200UPKH/000	152,4	6.00	8,7	0.343	4370	982	1,41	0.95
			7200 UP 750	7200UPKL/000	190,5	7.50	8,7	0.343	5450	1225	1,74	1.17
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™			7200 D2K 325	7200D2KKD/000	82,6	3.25	8,7	0.343	2300	517	0,80	0.54
			7200 D2K 450	7200D2KKG/000	114,3	4.50	8,7	0.343	3290	740	1,08	0.72
			7200 D2K 600	7200D2KKH/000	152,4	6.00	8,7	0.343	4370	982	1,41	0.95
			7200 D2K 750	7200D2KKL/000	190,5	7.50	8,7	0.343	5450	1225	1,74	1.17
ULTRA PERFORMANCE HOMOPOLYMER DELR UP	PBT	WITH TRACKING GUIDE	7200G UP 325	7200GUPKD/000	82,6	3.25	8,7	0.343	2300	517	0,80	0.54
			7200G UP 450	7200GUPKG/000	114,3	4.50	8,7	0.343	3290	740	1,08	0.72
			7200G UP 600	7200GUPKH/000	152,4	6.00	8,7	0.343	4370	982	1,41	0.95
			7200G UP 750	7200GUPKL/000	190,5	7.50	8,7	0.343	5450	1225	1,74	1.17
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™			7200G D2K 325	7200GD2KKD/000	82,6	3.25	8,7	0.343	2300	517	0,80	0.54
			7200G D2K 450	7200GD2KKG/000	114,3	4.50	8,7	0.343	3290	740	1,08	0.72
			7200G D2K 600	7200GD2KKH/000	152,4	6.00	8,7	0.343	4370	982	1,41	0.95
			7200G D2K 750	7200GD2KKL/000	190,5	7.50	8,7	0.343	5450	1225	1,74	1.17

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

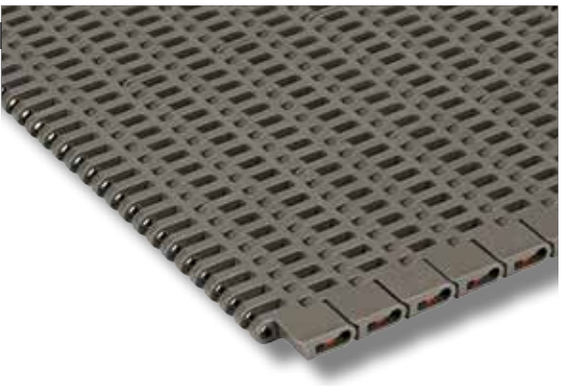


8,7 mm (0.343") THICKNESS
FLUSH GRID


This belt has an excellent combination of open and support areas to allow drainage of liquids and good support of the conveyed product. This belt is particularly suitable for conveying of aluminium cans.

- **Belt widths:** 228,6 mm (9") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 30000 N/m (2,056 lbs/ft) for UP and D2K2™ materials
- **Belt weight:** 8,46 kg/m² (1.73 lbs/ft²) for UP and D2K2™ materials

DUPONT® KEVLAR® INSIDE





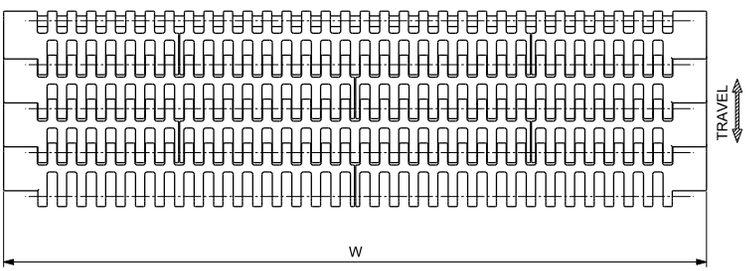

Materials see page 14
Sprockets see pages 229÷231
Applications see page 24

WIDTH W		MATERIALS		
		Module		Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®	D2K2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®	
mm	inch	PART NUMBER	PART NUMBER	
228,6	9	**7200UP009**	**7200D2K009**	PBT
304,8	12	**7200UP012**	**7200D2K012**	
381,0	15	**7200UP015**	**7200D2K015**	
457,2	18	**7200UP018**	**7200D2K018**	
533,4	21	**7200UP021**	**7200D2K021**	
609,6	24	**7200UP024**	**7200D2K024**	
685,8	27	**7200UP027**	**7200D2K027**	
762,0	30	**7200UP030**	**7200D2K030**	
838,2	33	**7200UP033**	**7200D2K033**	
914,4	36	**7200UP036**	**7200D2K036**	
990,6	39	**7200UP039**	**7200D2K039**	
1066,8	42	**7200UP042**	**7200D2K042**	
1143,0	45	**7200UP045**	**7200D2K045**	
1219,2	48	**7200UP048**	**7200D2K048**	
1295,4	51	**7200UP051**	**7200D2K051**	
1371,6	54	**7200UP054**	**7200D2K054**	
1447,8	57	**7200UP057**	**7200D2K057**	
1524,0	60	**7200UP060**	**7200D2K060**	

Belts wider than 1524 mm (60") are available in 76,2 mm (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 63" wide belt (=60+3 inches) the PN for UP material is "7200UP063".

Standard packaging:
Belts are supplied in the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **7200**
- **7300**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL




24T & 25T SPROCKETS


(for 27T see next page)

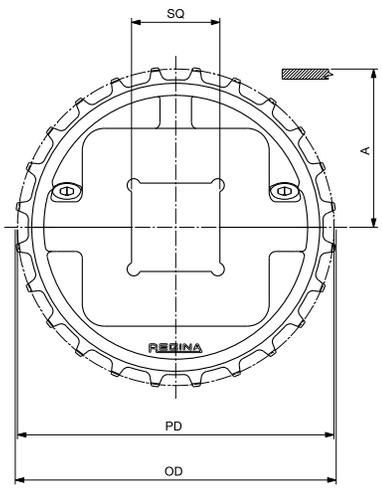


SQUARE BORE - DRIVE/IDLER

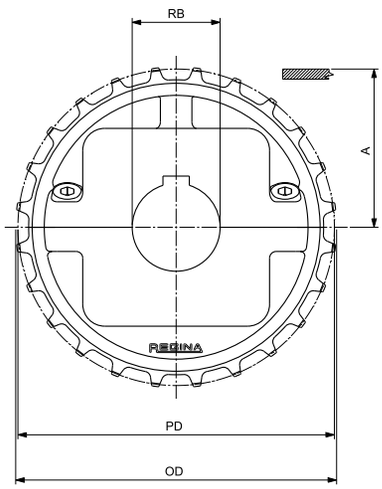

ROUND BORE - DRIVE

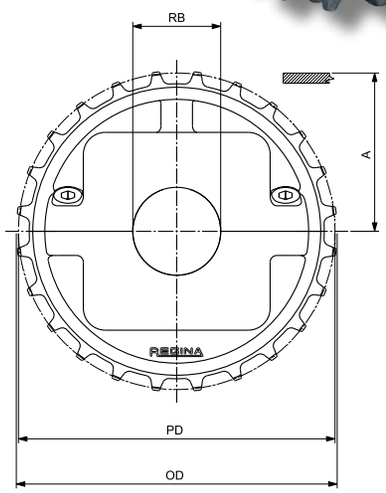

ROUND BORE - IDLER



MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBST73002430**	**MPBSF73002430**	0,41	0.91
							35			**MPBST73002435**	**MPBSF73002435**	0,41	0.90
							40		**MPBSQ73002440**	**MPBST73002440**	**MPBSF73002440**	0,40	0.88
							45			**MPBST73002445**	**MPBSF73002445**	0,39	0.86
							50		**MPBSQ73002450**	**MPBST73002450**	**MPBSF73002450**	0,38	0.83
24	145,95	5.746	146,00	5.748	68,60	2.701	60			**MPBST73002460**	**MPBSF73002460**	0,35	0.78
								1	MPBSQ730024254	MPBST730024254	MPBSF730024254	0,42	0.93
								1 3/16		MPBST730024301	MPBSF730024301	0,41	0.91
								1 1/4		MPBST730024317	MPBSF730024317	0,41	0.91
								1 7/16		MPBST730024365	MPBSF730024365	0,40	0.89
								1 1/2	MPBSQ730024381	MPBST730024381	MPBSF730024381	0,40	0.88
								2	MPBSQ730024508	MPBST730024508	MPBSF730024508	0,38	0.83
								2 1/2	MPBSQ730024635	MPBST730024635	MPBSF730024635	0,34	0.76
							30			**MPBST73002530**	**MPBSF73002530**	0,43	0.94
							35			**MPBST73002535**	**MPBSF73002535**	0,42	0.93
							40		**MPBSQ73002540**	**MPBST73002540**	**MPBSF73002540**	0,41	0.91
							45			**MPBST73002545**	**MPBSF73002545**	0,40	0.89
							50		**MPBSQ73002550**	**MPBST73002550**	**MPBSF73002550**	0,39	0.86
25	152,99	6.023	152,00	5.984	71,70	2.823	60			**MPBST73002560**	**MPBSF73002560**	0,37	0.81
								1	MPBSQ730025254	MPBST730025254	MPBSF730025254	0,43	0.96
								1 3/16		MPBST730025301	MPBSF730025301	0,43	0.94
								1 1/4		MPBST730025317	MPBSF730025317	0,43	0.94
								1 7/16		MPBST730025365	MPBSF730025365	0,42	0.92
								1 1/2	MPBSQ730025381	MPBST730025381	MPBSF730025381	0,42	0.92
								2	MPBSQ730025508	MPBST730025508	MPBSF730025508	0,39	0.86
								2 1/2	MPBSQ730025635	MPBST730025635	MPBSF730025635	0,36	0.79

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **7200**
- **7300**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL




27T SPROCKET


(for 24T & 25T see previous page)

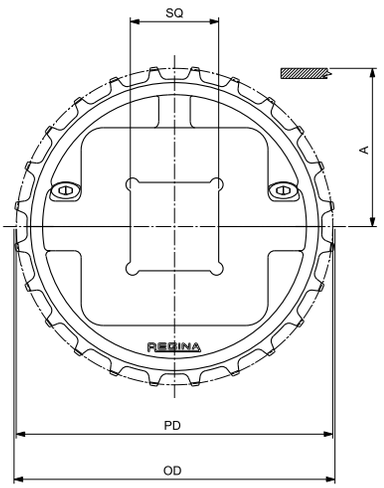


SQUARE BORE - DRIVE/IDLER

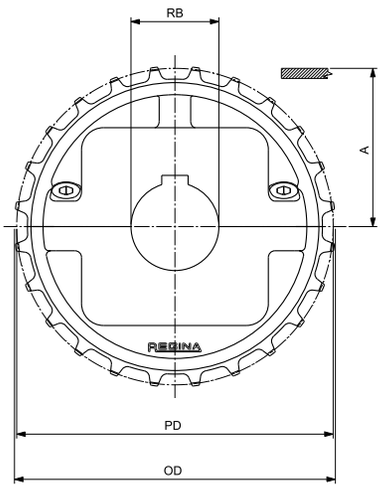

ROUND BORE - DRIVE

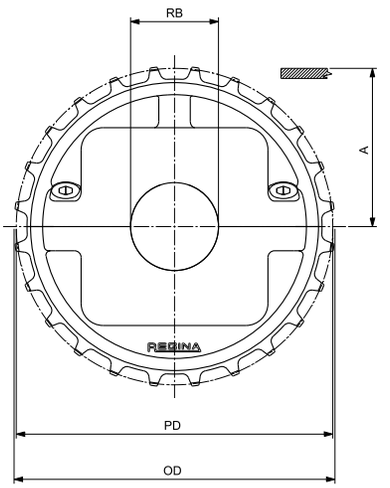

ROUND BORE - IDLER





MOULDED SOLID IDLER WHEELS
See page 124



MOULDED SPLIT IDLER WHEELS
SEE PAGE 195



MACHINED SPLIT IDLER WHEELS
See page 126

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBST73002730**	**MPBSF73002730**	0,46	1.01
							35			**MPBST73002735**	**MPBSF73002735**	0,45	0.99
							40		**MPBSQ73002740**	**MPBST73002740**	**MPBSF73002740**	0,44	0.97
							45			**MPBST73002745**	**MPBSF73002745**	0,43	0.95
							50		**MPBSQ73002750**	**MPBST73002750**	**MPBSF73002750**	0,42	0.93
27	164,09	6.460	164,20	6.465	77,70	3.059	60			**MPBST73002760**	**MPBSF73002760**	0,40	0.87
								1	**MPBSQ730027254**	**MPBST730027254**	**MPBSF730027254**	0,46	1.02
								1 3/16		**MPBST730027301**	**MPBSF730027301**	0,46	1.01
								1 1/4		**MPBST730027317**	**MPBSF730027317**	0,46	1.01
								1 7/16		**MPBST730027365**	**MPBSF730027365**	0,45	0.99
								1 1/2	**MPBSQ730027381**	**MPBST730027381**	**MPBSF730027381**	0,45	0.98
								2	**MPBSQ730027508**	**MPBST730027508**	**MPBSF730027508**	0,42	0.93
								2 1/2	**MPBSQ730027635**	**MPBST730027635**	**MPBSF730027635**	0,39	0.85

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **7200**
- **7300**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



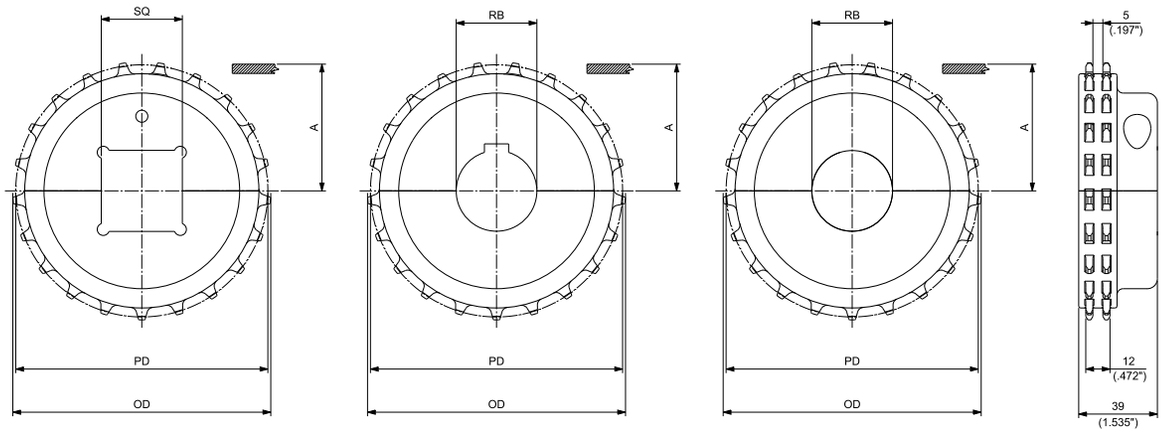

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							25			**MPBAST73001725**	**MPBASF73001725**	0,25	0.54
							30			**MPBAST73001730**	**MPBASF73001730**	0,24	0.52
							35			**MPBAST73001735**	**MPBASF73001735**	0,23	0.50
17	103,67	4.081	103,60	4.079	47,50	1.870	40		**MPBASQ73001740**	**MPBAST73001740**	**MPBASF73001740**	0,21	0.47
								1	MPBASQ730017254	MPBAST730017254	MPBASF730017254	0,25	0.54
								1 3/16		MPBAST730017301	MPBASF730017301	0,24	0.52
								1 1/4		MPBAST730017317	MPBASF730017317	0,23	0.52
								1 3/8		MPBAST730017349	MPBASF730017349	0,23	0.50
								1 7/16		MPBAST730017365	MPBASF730017365	0,22	0.49
								1 1/2	MPBSQ730017381	MPBAST730017381	MPBASF730017381	0,22	0.48
							25			**MPBAST73002125**	**MPBASF73002125**	0,42	0.92
							30			**MPBAST73002130**	**MPBASF73002130**	0,41	0.90
							35			**MPBAST73002135**	**MPBASF73002135**	0,40	0.88
							40		**MPBASQ73002140**	**MPBAST73002140**	**MPBASF73002140**	0,39	0.85
							45			**MPBAST73002145**	**MPBASF73002145**	0,37	0.82
							50		**MPBASQ73002150**	**MPBAST73002150**	**MPBASF73002150**	0,35	0.78
21	127,82	5.032	127,90	5.035	59,60	2.346	60			**MPBAST73002160**	**MPBASF73002160**	0,32	0.69
								1	MPBASQ730021254	MPBAST730021254	MPBASF730021254	0,42	0.92
								1 3/16		MPBAST730021301	MPBASF730021301	0,41	0.90
								1 1/4		MPBAST730021317	MPBASF730021317	0,41	0.90
								1 3/8		MPBAST730021349	MPBASF730021349	0,40	0.88
								1 7/16		MPBAST730021365	MPBASF730021365	0,39	0.87
								1 1/2	MPBASQ730021381	MPBAST730021381	MPBASF730021381	0,39	0.86
								2	MPBASQ730021508	MPBAST730021508	MPBASF730021508	0,35	0.77

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

1" Pitch Heavy Duty Belts and Chains



INDUSTRIES AND APPLICATIONS

Suitable for handling loose and packaged products, such as glass bottles, aluminium & steel cans, in heavy duty applications

INDUSTRIES

Bottling and canning

Container manufacturing
(in particular glass bottles)

Paper/cardboard

APPLICATIONS

Depalletizer

Pressureless Inliners and Combiners

Single lane & mass conveyors

Accumulation tables


Case conveyors

Palletizers







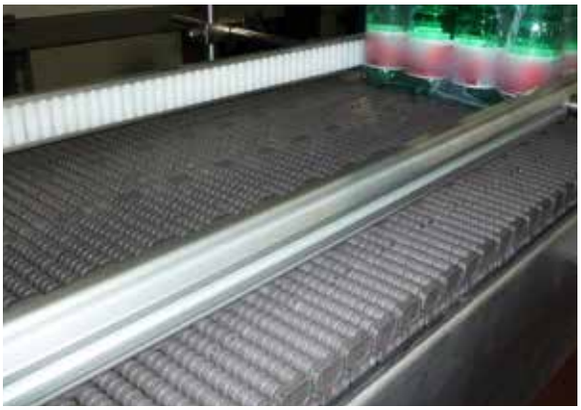

FEATURES





- Strong hinge design ensure high mechanical strength for the most demanding applications.
- Round design edge and no gap between hinges allow a superior product handling in linear and side transfer of the products.
- Large and close bottom sliding surface with strong edges allow:
  - Higher belt wear resistance thanks to the less specific pressure between belt and wear strips
  - Maximum resistance against broken debris present on the line
- The belts can be used on conveyors side by side with Magnetic or TAB sideflexing chains 793 series allowing a smooth products transfer between straight running and sideflexing conveyors.
- Availability of LBP version (LBP USPM and LBP XSPM series), equipped with superior rotation capability rollers, to safely handle packaged products in long center to center accumulation conveyors.
- Rubberized belts available (HF USPM series) displaying maximum and inform rubberized area allowing outstanding gripping capacity on the conveyed products.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

12,7 mm (0.5") THICKNESS
SOLID TOP



The extremely good flatness, manufacturing accuracy and low coefficient of friction make the side transfer of the products very easy.
Completely closed surface, no gap between the modules, even when engaging on the sprockets. Particulary suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base)

DUPONT® KEVLAR® INSIDE

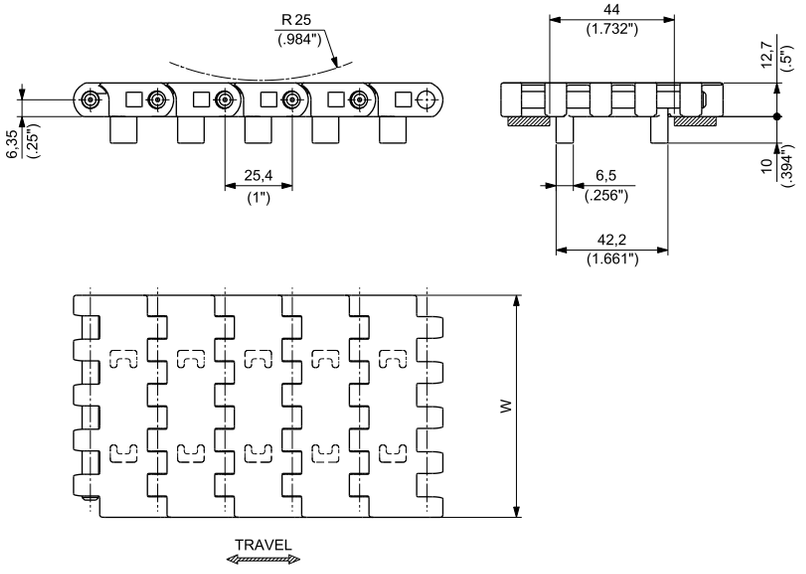

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	USPMG UP K 83,8	USPMGUPKRA/000	83,8	3.30	12,7	0.50	2975	670	1,24	0.83
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		USPMG D2K K 83,8	USPMGD2KRA/000	83,8	3.30	12,7	0.50	2975	670	1,24	0.68
ABRASION RESISTANT POLYAMIDE[1] AR		USPMG AR K 83,8	USPMGARKRA/000	83,8	3.30	12,7	0.50	2975	670	1,19	0.80

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




12,7 mm (0.5") THICKNESS
SOLID TOP

Extremely good flatness, manufacturing accuracy and low coefficient of friction make the side transfer of the products very easy.
Completely closed surface, no gap between the modules, even when engaging on the sprockets.
Particulary suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base)


- **Belt widths:** 85 mm (3.34") or wider in 85 mm (3.34") increments
- **Working Load (at 25°C/77°F):** 35000 N/m (2400 lbs/ft) for UP, DK2™ and AR materials
- **Belt weight:** 14,11 kg/m² (2.89 lbs/ft²) for UP and DK2™ materials
  13,59 kg/m² (2.78 lbs/ft²) for AR material

DK2™ DUPONT® KEVLAR® INSIDE

VERSION WITHOUT TRACKING GUIDE

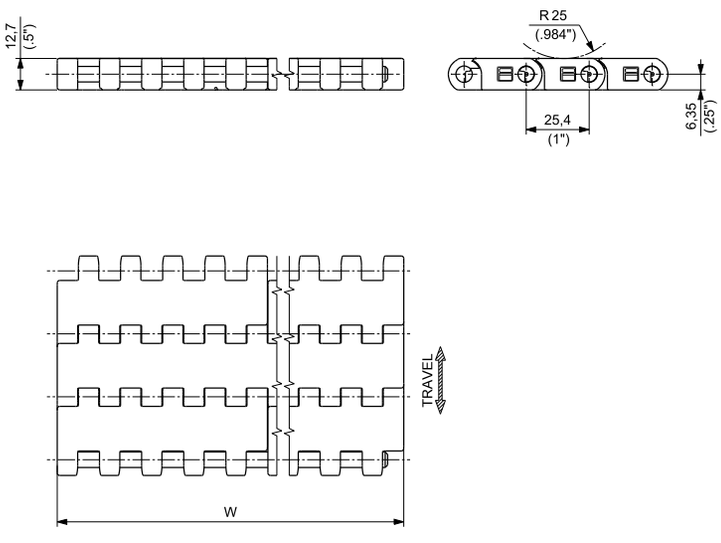

VERSION WITH TRACKING GUIDE

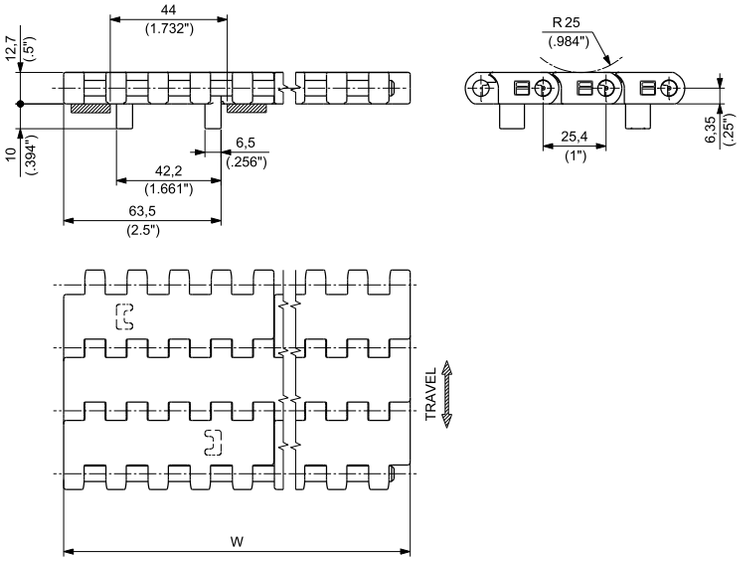

NOTE: The belt is also available with single tracking guide at both belt sides. Please contact REGINA customer service for further information.

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

WIDTH W		MATERIALS					
		Module					Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®		AR ABRASION RESISTANT POLYAMIDE(1)	
		PART NUMBER		PART NUMBER		PART NUMBER	
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE
85	3.34	**USPMUP0085**	**USPMGUP0085**	**USPMD2K0085**	**USPMGD2K0085**	**USPMAR0085**	**USPMGAR0085**
170	6.69	**USPMUP0170**	**USPMG1UP0170**	**USPMD2K0170**	**USPMG1D2K0170**	**USPMAR0170**	**USPMG1AR0170**
255	10.04	**USPMUP0255**	**USPMG1UP0255**	**USPMD2K0255**	**USPMG1D2K0255**	**USPMAR0255**	**USPMG1AR0255**
340	13.39	**USPMUP0340**	**USPMG1UP0340**	**USPMD2K0340**	**USPMG1D2K0340**	**USPMAR0340**	**USPMG1AR0340**
425	16.73	**USPMUP0425**	**USPMG1UP0425**	**USPMD2K0425**	**USPMG1D2K0425**	**USPMAR0425**	**USPMG1AR0425**
510	20.08	**USPMUP0510**	**USPMG1UP0510**	**USPMD2K0510**	**USPMG1D2K0510**	**USPMAR0510**	**USPMG1AR0510**
595	23.43	**USPMUP0595**	**USPMG1UP0595**	**USPMD2K0595**	**USPMG1D2K0595**	**USPMAR0595**	**USPMG1AR0595**
680	26.77	**USPMUP0680**	**USPMG1UP0680**	**USPMD2K0680**	**USPMG1D2K0680**	**USPMAR0680**	**USPMG1AR0680**
765	30.12	**USPMUP0765**	**USPMG1UP0765**	**USPMD2K0765**	**USPMG1D2K0765**	**USPMAR0765**	**USPMG1AR0765**
850	33.46	**USPMUP0850**	**USPMG1UP0850**	**USPMD2K0850**	**USPMG1D2K0850**	**USPMAR0850**	**USPMG1AR0850**
935	36.81	**USPMUP0935**	**USPMG1UP0935**	**USPMD2K0935**	**USPMG1D2K0935**	**USPMAR0935**	**USPMG1AR0935**
1020	40.16	**USPMUP1020**	**USPMG1UP1020**	**USPMD2K1020**	**USPMG1D2K1020**	**USPMAR1020**	**USPMG1AR1020**

	PBT

(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "USPMUP1105".

Standard packaging:
Belt widths ≤ 680 mm (26.77") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 765 mm (30.12") and ≤ 1020 mm (40.16") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




ACTIVE TRANSFER MODULES
12,7 mm (0.5") THICKNESS
SOLID TOP

Extremely good flatness, manufacturing accuracy and low coefficient of friction make the side transfer of the products very easy. Completely closed surface, no gap between the modules, even when engaging on the sprockets. Particulary suitable for glass products, small sized products and unstable containers (for example PET bottles with petaloid base)

DUPONT® KEVLAR® INSIDE

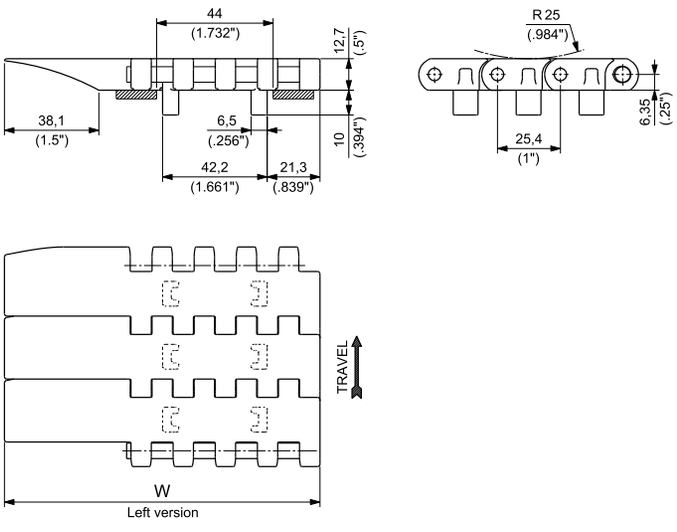

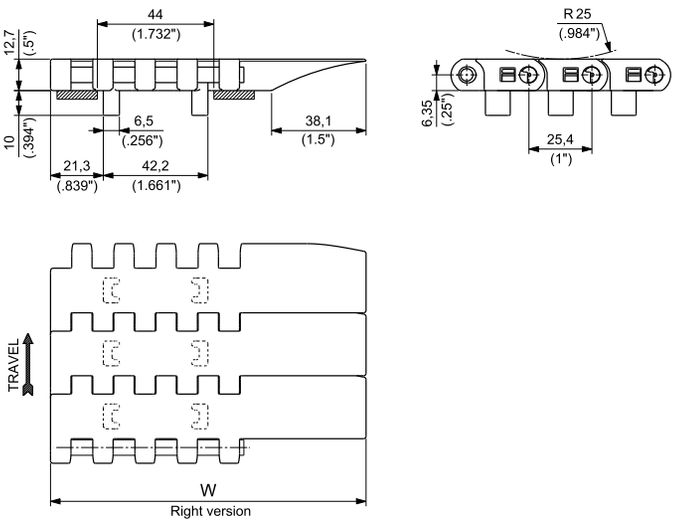

Materials see page 14

Sprockets see pages 244÷246

Applications see page 24

USPMG ATM - Left Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	USPMGATM UP 0085 SX	USPMGATMUP085S	127,5	5.02	12,7	0.5	2975	669	1,55	1.04
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKT2™		USPMGATM D2K 0085 SX	USPMGATMD2K085S	127,5	5.02	12,7	0.5	2975	669	1,55	1.04
ABRASION RESISTANT POLYAMIDE (1) AR		USPMGATM AR 0085 SX	USPMGATMAR085S	127,5	5.02	12,7	0.5	2975	669	1,50	1.01

USPMG ATM - Right Version


MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	USPMGATM UP 0085 DX	USPMGATMUP085D	127,5	5.02	12,7	0.5	2975	669	1,55	1.04
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKT2™		USPMGATM D2K 0085 DX	USPMGATMD2K085D	127,5	5.02	12,7	0.5	2975	669	1,55	1.04
ABRASION RESISTANT POLYAMIDE (1) AR		USPMGATM AR 0085 DX	USPMGATMAR085D	127,5	5.02	12,7	0.5	2975	669	1,50	1.01

(1) ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


12,7 mm (0.5") THICKNESS
RUBBERIZED SURFACE - FULL COVER

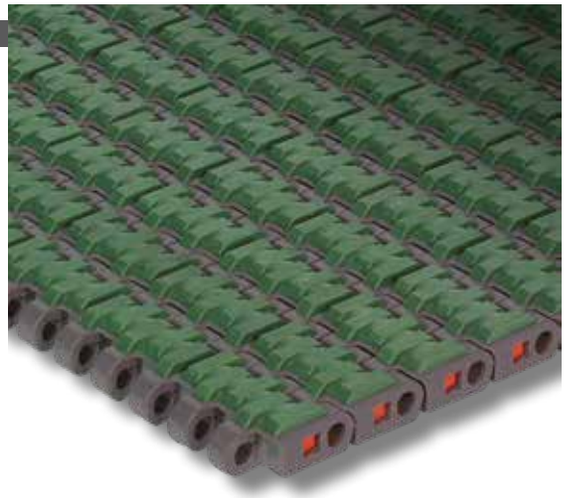


HF USPM belts are an ideal solution for heavy duty inclines, declines and package handling (acceleration, deceleration and rotation).

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 30000 N/m (2055 lbs/ft) for ULF material
  18100 N/m (1,240 lbs/ft) for PP material
- **Belt weight:** 14,84 kg/m² (3.04 lbs/ft²) for ULF material
  10,38 kg/m² (2.13 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

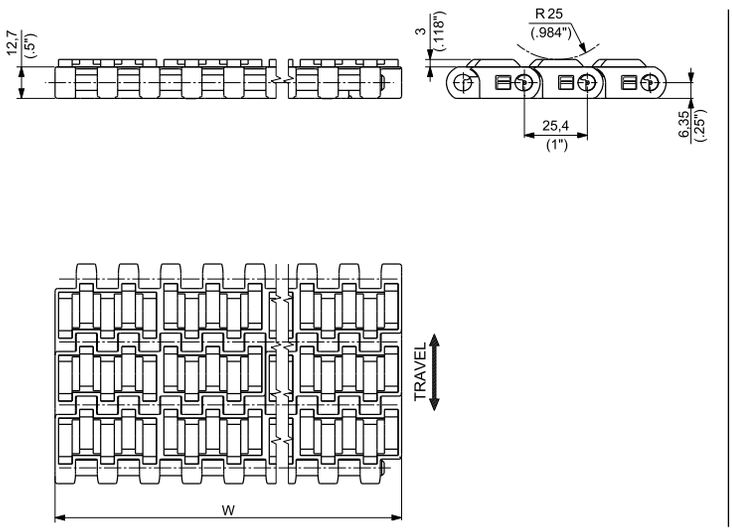

VERSION WITH TRACKING GUIDE

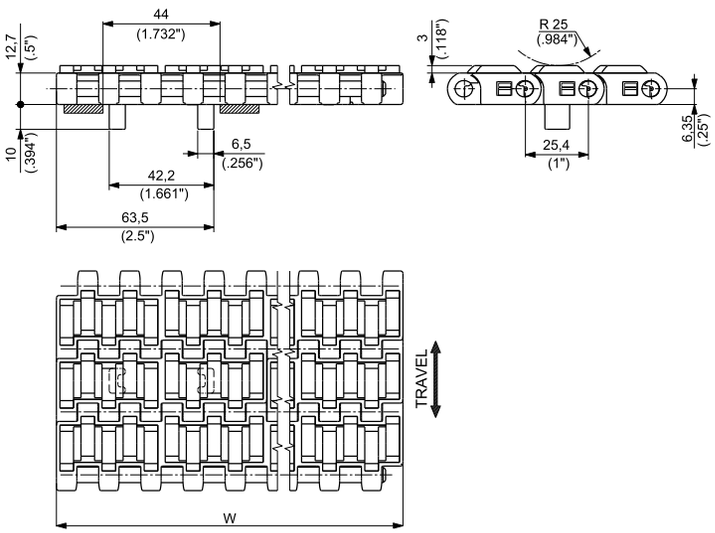

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

WIDTH W		MATERIALS					
		Module				Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN		PP SPECIAL POLIPROPYLENE(1)			
		PART NUMBER		PART NUMBER			
mm	inche	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE		
85	3.35	**HFUMULF0085**	**HFUMGULF0085**	**HFUMPP0085**	**HFUMGPP0085**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
170	6.69	**HFUMULF0170**	**HFUMG1ULF0170**	**HFUMPP0170**	**HFUMG1PP0170**		
255	10.04	**HFUMULF0255**	**HFUMG1ULF0255**	**HFUMPP0255**	**HFUMG1PP0255**		
340	13.39	**HFUMULF0340**	**HFUMG1ULF0340**	**HFUMPP0340**	**HFUMG1PP0340**		
425	16.73	**HFUMULF0425**	**HFUMG1ULF0425**	**HFUMPP0425**	**HFUMG1PP0425**		
510	20.08	**HFUMULF0510**	**HFUMG1ULF0510**	**HFUMPP0510**	**HFUMG1PP0510**		
595	23.43	**HFUMULF0595**	**HFUMG1ULF0595**	**HFUMPP0595**	**HFUMG1PP0595**		
680	26.77	**HFUMULF0680**	**HFUMG1ULF0680**	**HFUMPP0680**	**HFUMG1PP0680**		
765	30.12	**HFUMULF0765**	**HFUMG1ULF0765**	**HFUMPP0765**	**HFUMG1PP0765**		
850	33.46	**HFUMULF0850**	**HFUMG1ULF0850**	**HFUMPP0850**	**HFUMG1PP0850**		
935	36,81	**HFUMULF0935**	**HFUMG1ULF0935**	**HFUMPP0935**	**HFUMG1PP0935**		
1020	40,16	**HFUMULF1020**	**HFUMG1ULF1020**	**HFUMPP1020**	**HFUMG1PP1020**		


(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for ULF material is "HFUMULF1105".

Standard packaging:
Belt widths ≤ 680 mm (26.77") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 765 mm (30.12") and ≤ 1020 mm (40.16") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


12,7 mm (0.5") THICKNESS
RUBBERIZED SURFACE - SIDE INDENT

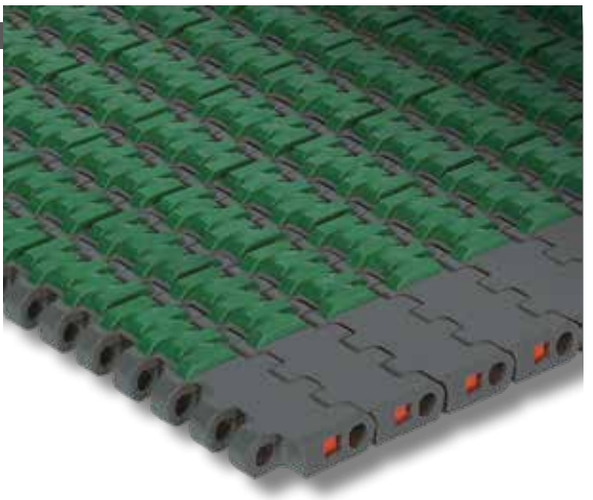


HFS USPM belts are an ideal solution for heavy duty inclines, declines and package handling (acceleration, deceleration and rotation).

- **Belt widths:** 255 mm (10.04") or wider in 85 mm (10.04") increments
- **Working Load (at 25°C/77°F):** 30000 N/m (2055 lbs/ft) for ULF material
  18100 N/m (1,240 lbs/ft) for PP material
- **Belt weight:** 14,71 kg/m² (3.01 lbs/ft²) for ULF material
  10,38 kg/m² (2.13 lbs/ft²) for PP material

VERSION WITHOUT TRACKING GUIDE

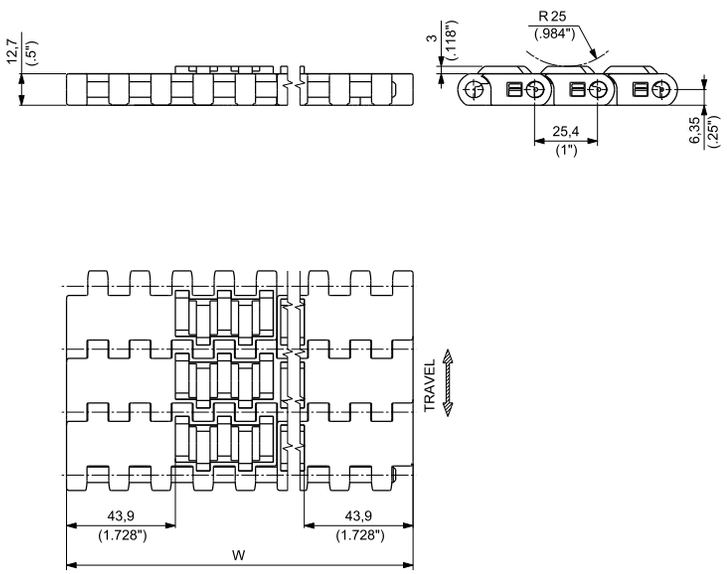

VERSION WITH TRACKING GUIDE

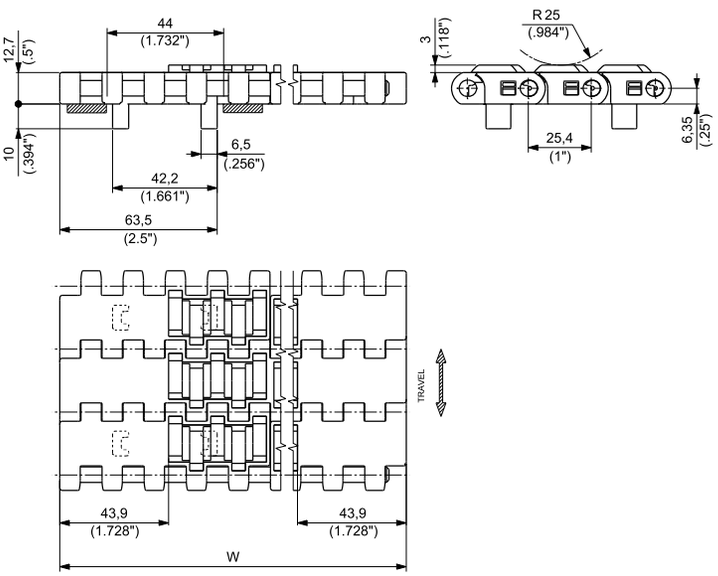

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

WIDTH W		MATERIALS					
		Module				Rubber	Pin
		ULF ULTRA LOW FRICTION POLYESTER RESIN		PP SPECIAL POLIPROPYLENE[1]			
		PART NUMBER		PART NUMBER			
mm	inches	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE		
255	10.04	**HFSUMULF0255**	**HFSUMG1ULF0255**	**HFSUMPP0255**	**HFSUMG1PP0255**	THERMOPLASTIC TPE Hardness: 55 ShA (for ULF material) THERMOPLASTIC TPE Hardness: 50 ShA (for PP material)	POM for ULF material PBT for PP material
340	13.39	**HFSUMULF0340**	**HFSUMG1ULF0340**	**HFSUMPP0340**	**HFSUMG1PP0340**		
425	16.73	**HFSUMULF0425**	**HFSUMG1ULF0425**	**HFSUMPP0425**	**HFSUMG1PP0425**		
510	20.08	**HFSUMULF0510**	**HFSUMG1ULF0510**	**HFSUMPP0510**	**HFSUMG1PP0510**		
595	23.43	**HFSUMULF0595**	**HFSUMG1ULF0595**	**HFSUMPP0595**	**HFSUMG1PP0595**		
680	26.77	**HFSUMULF0680**	**HFSUMG1ULF0680**	**HFSUMPP0680**	**HFSUMG1PP0680**		
765	30.12	**HFSUMULF0765**	**HFSUMG1ULF0765**	**HFSUMPP0765**	**HFSUMG1PP0765**		
850	33.46	**HFSUMULF0850**	**HFSUMG1ULF0850**	**HFSUMPP0850**	**HFSUMG1PP0850**		
935	36.81	**HFSUMULF0935**	**HFSUMG1ULF0935**	**HFSUMPP0935**	**HFSUMG1PP0935**		
1020	40.16	**HFSUMULF1020**	**HFSUMG1ULF1020**	**HFSUMPP1020**	**HFSUMG1PP1020**		

[1] ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for ULF material is "HFSUMULF1105".

Standard packaging:
Belt widths ≤ 680 mm (26.77") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 765 mm (30.12") and ≤ 1020 mm (40.16") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied at the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




12,7 mm (0.5") THICKNESS
LBP ROLLERS


Suitable for applications where a conveyor with a large accumulating section is needeed.

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 35000 N/m (2400 lbs/ft)
- **Belt weight:** 31,11 kg/m² (6.37 lbs/ft²)

VERSION WITHOUT TRACKING GUIDE

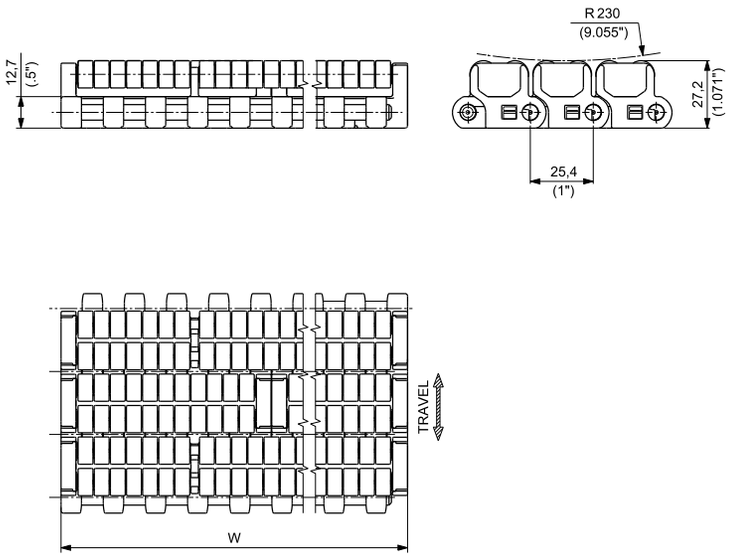

VERSION WITH TRACKING GUIDE

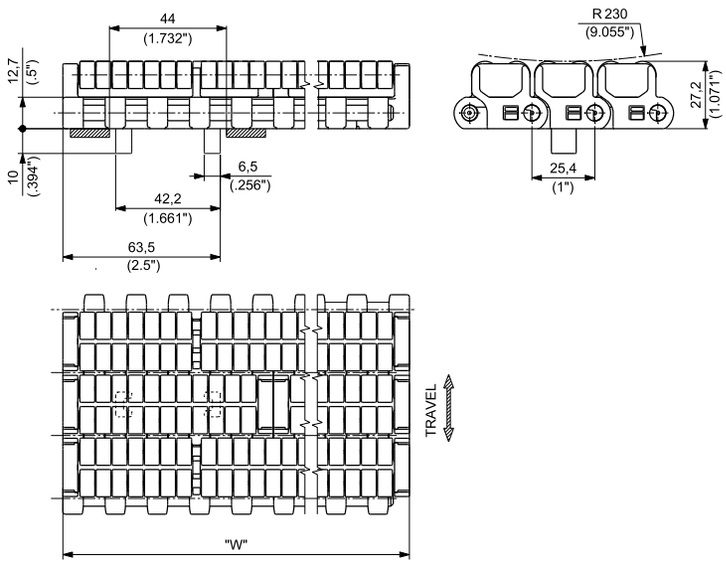

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

WIDTH W		MATERIALS		
		Module and roller		Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**LBPUSPMUP0085**	**LBPUSPMGUP0085**	
170	6.69	**LBPUSPMUP0170**	**LBPUSPMG1UP0170**	
255	10.04	**LBPUSPMUP0255**	**LBPUSPMG1UP0255**	
340	13.39	**LBPUSPMUP0340**	**LBPUSPMG1UP0340**	
425	16.73	**LBPUSPMUP0425**	**LBPUSPMG1UP0425**	
510	20.08	**LBPUSPMUP0510**	**LBPUSPMG1UP0510**	PBT
595	23.43	**LBPUSPMUP0595**	**LBPUSPMG1UP0595**	
680	26.77	**LBPUSPMUP0680**	**LBPUSPMG1UP0680**	
765	30.12	**LBPUSPMUP0765**	**LBPUSPMG1UP0765**	
850	33.46	**LBPUSPMUP0850**	**LBPUSPMG1UP0850**	
935	36.81	**LBPUSPMUP0935**	**LBPUSPMG1UP0935**	
1020	40.16	**LBPUSPMUP1020**	**LBPUSPMG1UP1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN for UP material is "LBPUSPMUP1105".

Standard packaging:
Belt widths ≤ 425 mm (16.73") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 510 mm (20.09") and ≤ 1020 (40.16") are supplied in rolls of 1,016 m (3.33 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied in the lenght requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




11 mm (0.433") THICKNESS
LBP ROLLERS
SAFETY DESIGN


Designed for product accumulation applications where a combination of high performance, improved safety and energy saving are required. LBP rollers allow for pressure reduction among accumulated products and for belt pull reduction.

- **Belt widths:** 85 mm (3.346") or wider in 85 mm (3.346") increments
- **Working Load (at 25°C/77°F):** 34000 N/m (2,330 lbs/ft)
- **Belt weight:** 19,40 kg/m^2 (3.97 lbs/ft^2)

VERSION WITHOUT TRACKING GUIDE

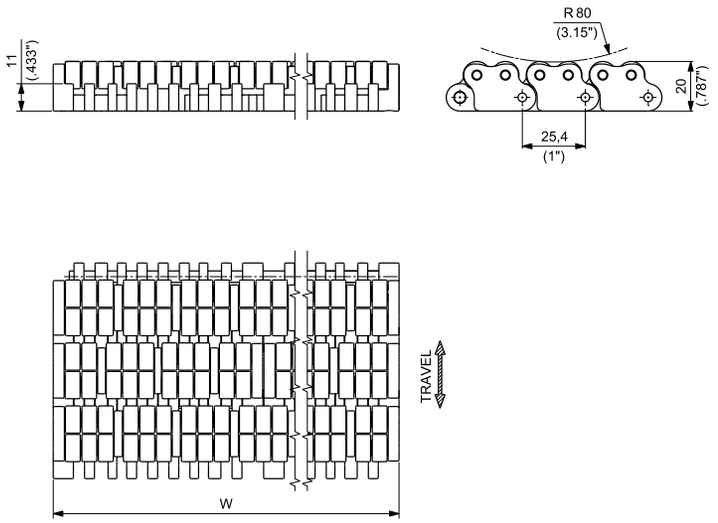

VERSION WITH TRACKING GUIDE

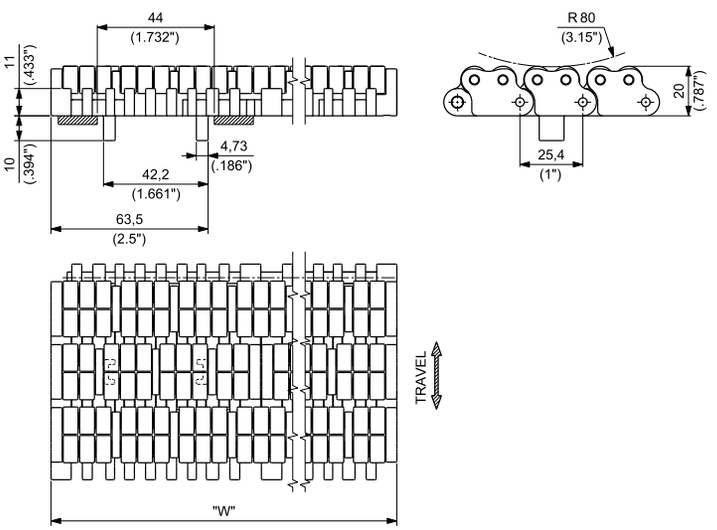

Materials see page 14
Sprockets see pages 244÷246
Modular transfer plates see pages 353÷354
Applications see page 24

WIDTH W		MATERIALS		
		Module and roller		Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®		
		PART NUMBER		
mm	inch	WITHOUT TRACKING GUIDE	WITH TRACKING GUIDE	
85	3.35	**LBPXSPMUP0085**	**LBPXSPMGUP0085**	
170	6.69	**LBPXSPMUP0170**	**LBPXSPMG1UP0170**	
255	10.04	**LBPXSPMUP0255**	**LBPXSPMG1UP0255**	
340	13.39	**LBPXSPMUP0340**	**LBPXSPMG1UP0340**	
425	16.73	**LBPXSPMUP0425**	**LBPXSPMG1UP0425**	
510	20.08	**LBPXSPMUP0510**	**LBPXSPMG1UP0510**	PBT
595	23.43	**LBPXSPMUP0595**	**LBPXSPMG1UP0595**	
680	26.77	**LBPXSPMUP0680**	**LBPXSPMG1UP0680**	
765	30.12	**LBPXSPMUP0765**	**LBPXSPMG1UP0765**	
850	33.46	**LBPXSPMUP0850**	**LBPXSPMG1UP0850**	
935	36.81	**LBPXSPMUP0935**	**LBPXSPMG1UP0935**	
1020	40.16	**LBPXSPMUP1020**	**LBPXSPMG1UP1020**	

Belts wider than 1020 mm (40.16") are available in 85 mm (3.35") increments.
To identify the Part Numbers, please substitute the last four digits of the PN with the desired width.
Example: for a 1105 mm wide belt (=1020+85 mm) without guide, the PN is "LBPXSPMUP1105".

Standard packaging:
Belt widths ≤ 425 mm (16.73") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 510 mm (20.09") and ≤ 1020 (40.16") are supplied in rolls of 1,016 m (3.33 ft) each.
Belt widths ≥ 1105 mm (43.50") are supplied in the lenght requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


12,7 mm (0.5") THICKNESS
SOLID TOP




Completely closed surface, no gap between modules, even when engaging on the sprockets. Particulary suitable for glass products.


DUPONT® KEVLAR® INSIDE


VERSION WITHOUT TRACKING GUIDE

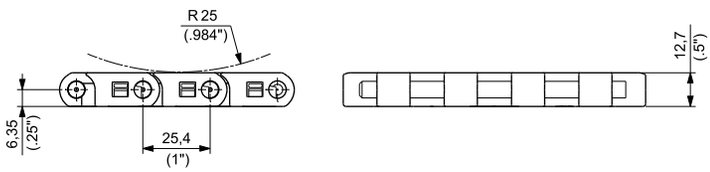

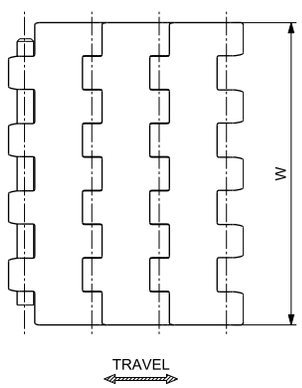

VERSION WITH TRACKING GUIDE

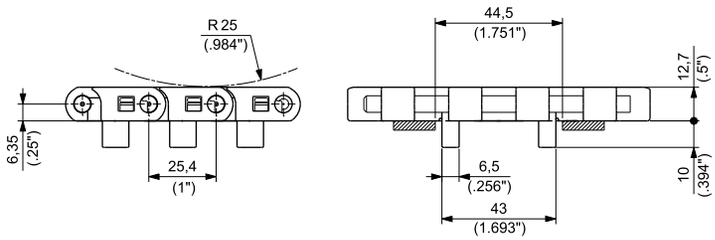

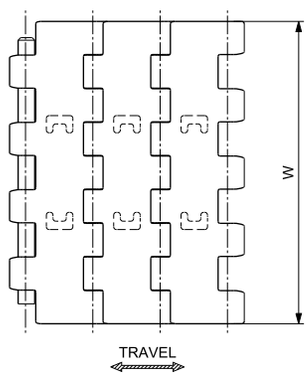

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	WITHOUT TRACKING GUIDE	USP UP 325	USPUPKD/000	82,6	3.25	12,7	0.50	2500	562	1,27	0.86
			USP UP 450	USPUPKG/000	114,3	4.50	12,7	0.50	3430	771	1,73	1.16
			USP UP 750	USPUPKL/000	190,5	7.50	12,7	0.50	5710	1284	2,83	1.90
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™			USP D2K 325	USPD2KKD/000	82,6	3.25	12,7	0.50	2500	562	1,27	0.86
			USP D2K 450	USPD2KKG/000	114,3	4.50	12,7	0.50	3430	771	1,73	1.16
			USP D2K 750	USPD2KKL/000	190,5	7.50	12,7	0.50	5710	1284	2,83	1.90
ABRASION RESISTANT POLYAMIDE [1] AR			USP AR 325	USPARKD/000	82,6	3.25	12,7	0.50	2500	562	1,23	0.82
			USP AR 450	USPARKG/000	114,3	4.50	12,7	0.50	3430	771	1,67	1.12
			USP AR 750	USPARKL/000	190,5	7.50	12,7	0.50	5710	1284	2,73	1.83
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	WITH TRACKING GUIDE	USPG UP 325	USPGUPKD/000	82,6	3.25	12,7	0.50	2500	562	1,27	0.86
			USPG UP 450	USPGUPKG/000	114,3	4.50	12,7	0.50	3430	771	1,73	1.16
			USPG UP 750	USPGUPKL/000	190,5	7.50	12,7	0.50	5710	1284	2,83	1.90
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™			USPG D2K 325	USPGD2KKD/000	82,6	3.25	12,7	0.50	2500	562	1,27	0.86
			USPG D2K 450	USPGD2KKG/000	114,3	4.50	12,7	0.50	3430	771	1,73	1.16
			USPG D2K 750	USPGD2KKL/000	190,5	7.50	12,7	0.50	5710	1284	2,83	1.90
ABRASION RESISTANT POLYAMIDE [1] AR			USPG AR 325	USPGARKD/000	82,6	3.25	12,7	0.50	2500	562	1,23	0.82
			USPG AR 450	USPGARKG/000	114,3	4.50	12,7	0.50	3430	771	1,67	1.12
			USPG AR 750	USPGARKL/000	190,5	7.50	12,7	0.50	5710	1284	2,73	1.83

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved





12,7 mm (0.5") THICKNESS
SOLID TOP

Completely closed surface, no gap between the modules, even when engaging on the sprockets. Particulary suitable for glass products.

- **Belt widths:** 152,4 mm (6") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 30000 N/m (2400 lbs/ft) for UP, DK2™ and AR materials
- **Belt weight:** 13,93 kg/m² (2.85 lbs/ft²) for UP and DK2™ materials
  13,40 kg/m² (2.74 lbs/ft²) for AR material

DUPONT® KEVLAR® INSIDE

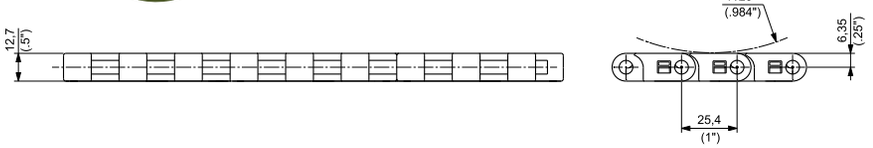

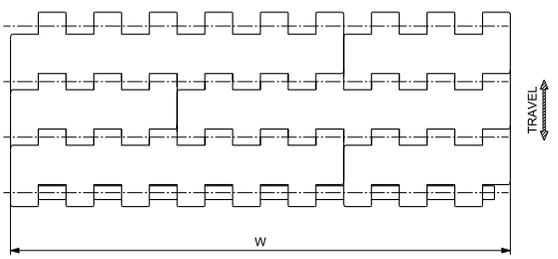

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

WIDTH W		MATERIALS			
		Module			Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN®	DK2™ SPECIAL DELRIN® REINFORCED WITH KEVLAR®	AR ABRASION RESISTANT POLYAMIDE(1)	
mm	inch	PART NUMBER	PART NUMBER	PART NUMBER	
152,40	6.0	**USPUP006**	**USPD2K006**	**USPAR006**	
228,60	9.0	**USPUP009**	**USPD2K009**	**USPAR009**	
304,80	12.0	**USPUP012**	**USPD2K012**	**USPAR012**	
381,00	15.0	**USPUP015**	**USPD2K015**	**USPAR015**	
457,20	18.0	**USPUP018**	**USPD2K018**	**USPAR018**	
533,40	21.0	**USPUP021**	**USPD2K021**	**USPAR021**	
609,60	24.0	**USPUP024**	**USPD2K024**	**USPAR024**	
685,80	27.0	**USPUP027**	**USPD2K027**	**USPAR027**	
762,00	30.0	**USPUP030**	**USPD2K030**	**USPAR030**	
838,20	33.0	**USPUP033**	**USPD2K033**	**USPAR033**	PBT
914,40	36.0	**USPUP036**	**USPD2K036**	**USPAR036**	
996,60	39.0	**USPUP039**	**USPD2K039**	**USPAR039**	
1066,80	42.0	**USPUP042**	**USPD2K042**	**USPAR042**	
1143,00	45.0	**USPUP045**	**USPD2K045**	**USPAR045**	
1219,20	48.0	**USPUP048**	**USPD2K048**	**USPAR048**	
1295,40	51.0	**USPUP051**	**USPD2K051**	**USPAR051**	
1371,60	54.0	**USPUP054**	**USPD2K054**	**USPAR054**	
1447,80	57.0	**USPUP057**	**USPD2K057**	**USPAR057**	
1524,00	60.0	**USPUP060**	**USPD2K060**	**USPAR060**	

(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH

Belts wider than 1524 mm (60") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 63" wide belt (=60+3 inches), the PN for UP material is "USPUP063".

Standard packaging:
Belts are supplied in the length requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


ACTIVE TRANSFER MODULES
12,7 mm (0.5") THICKNESS
SOLID TOP





To be used in combination with USP belt series.
Active transfer modules USPG ATM series allow the transfer of the products between two 90° conveyor tracks without using dead plates. The special module profile, wing shaped, supports the products dynamically during transfer on the take-away belt. Available left and right version.

DUPONT® KEVLAR® INSIDE

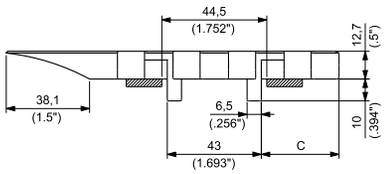

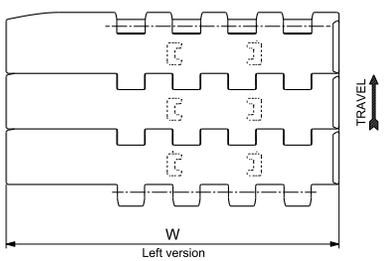

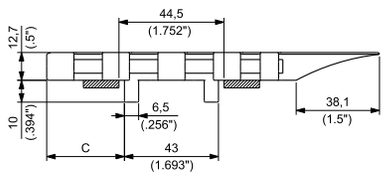

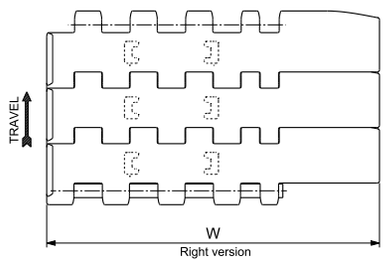

Materials see page 14
Sprockets see pages 244÷246
Applications see page 24

USPG ATM - Left Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	USPGATM UP 450 SX	USPGATMUP450S	152,4	6.0	12,7	0.5	3480	782	1,97	1.32
		USPGATM UP 750 SX	USPGATMUP750S	228,6	9.0	12,7	0.5	5715	1.285	3,06	2.05
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		USPGATM D2K 450 SX	USPGATMD2K450S	152,4	6.0	12,7	0.5	3480	782	1,97	1.32
		USPGATM D2K 750 SX	USPGATMD2K750S	228,6	9.0	12,7	0.5	5715	1.285	3,06	2.05
ABRASION RESISTANT POLYAMIDE (1) AR		USPGATM AR 450 SX	USPGATMAR450S	152,4	6.0	12,7	0.5	3480	782	1,97	1.32
		USPGATM AR 750 SX	USPGATMAR750S	228,6	9.0	12,7	0.5	5715	1.285	3,06	2.05

USPG ATM - Right Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	USPGATM UP 450 DX	USPGATMUP450D	152,4	6.0	12,7	0.5	3480	782	1,97	1.32
		USPGATM UP 750 DX	USPGATMUP750D	228,6	9.0	12,7	0.5	5715	1.285	3,06	2.05
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		USPGATM D2K 450 DX	USPGATMD2K450D	152,4	6.0	12,7	0.5	3480	782	1,97	1.32
		USPGATM D2K 750 DX	USPGATMD2K750D	228,6	9.0	12,7	0.5	5715	1.285	3,06	2.05
ABRASION RESISTANT POLYAMIDE (1) AR		USPGATM AR 450 DX	USPGATMAR450D	152,4	6.0	12,7	0.5	3480	782	1,97	1.32
		USPGATM AR 750 DX	USPGATMAR750D	228,6	9.0	12,7	0.5	5715	1.285	3,06	2.05

(1) ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **USPM**
- **USP**
- **LBP USPM**
- **LBP XSPM**
- **HF USPM / HFS USPM**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE



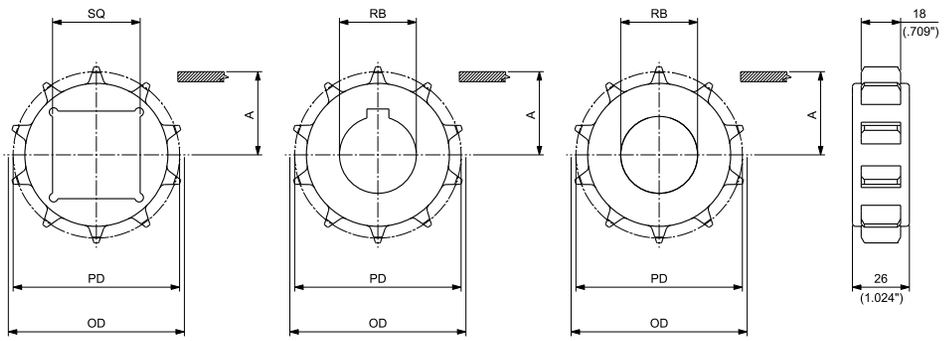

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
8	66,37	2.613	63,80	2.512	26,80	1.055	20			**MPBATUSP0820**	**MPBAFUSP0820**	0,05	0.11
							25			**MPBATUSP0825**	**MPBAFUSP0825**	0,05	0.10
							30			**MPBATUSP0830**	**MPBAFUSP0830**	0,04	0.09
								1		**MPBATUSP08254**	**MPBAFUSP08254**	0,05	0.10
								1 3/16		**MPBATUSP08301**	**MPBAFUSP08301**	0,04	0.09
								1 1/4		**MPBATUSP08317**	**MPBAFUSP08317**	0,04	0.08
10	82,19	3.236	80,40	3.165	34,70	1.366	30		**MPBAQUSP1030**	**MPBATUSP1030**	**MPBAFUSP1030**	0,09	0.19
							35			**MPBATUSP1035**	**MPBAFUSP1035**	0,08	0.17
							40		**MPBAQUSP1040**	**MPBATUSP1040**	**MPBAFUSP1040**	0,07	0.15
								1		**MPBATUSP10254**	**MPBAFUSP10254**	0,09	0.20
								1 3/16		**MPBATUSP10301**	**MPBAFUSP10301**	0,09	0.19
								1 1/4		**MPBATUSP10317**	**MPBAFUSP10317**	0,08	0.18

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **USPM**
- **USP**
- **LBP USPM**
- **LBP XSPM**
- **HF USPM / HFS USPM**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL




12T, 13T,14T, 15T & 16T SPROCKETS


(for 18T & 21T see next page)

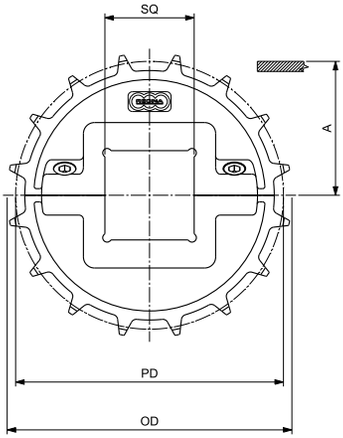

SQUARE BORE - DRIVE/IDLER

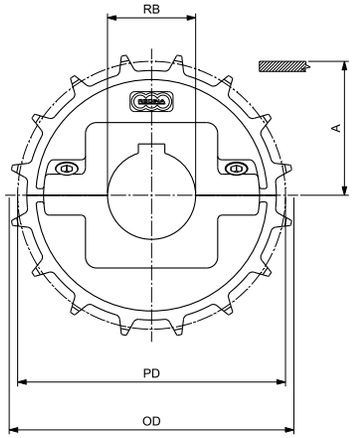

ROUND BORE - DRIVE

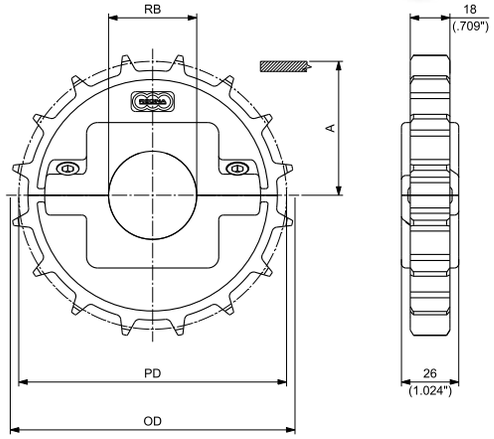

ROUND BORE - IDLER

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBSTUSP1230**	**MPBSFUSP1230**	0,12	0.27
							35			**MPBSTUSP1235**	**MPBSFUSP1235**	0,12	0.26
12	98,14	3.864	97,00	3.819	42,70	1.681	40			**MPBSTUSP1240**	**MPBSFUSP1240**	0,11	0.25
								1		MPBSTUSP12254	MPBSFUSP12254	0,13	0.28
								1¼		MPBSTUSP12317	MPBSFUSP12317	0,12	0.27
								1½	MPBSQUSP12381			0,11	0.24
							30			**MPBSTUSP1330**	**MPBSFUSP1330**	0,12	0.26
							35			**MPBSTUSP1335**	**MPBSFUSP1335**	0,11	0.25
13	106,14	4.179	105,50	4.154	46,70	1.839	40			**MPBSTUSP1340**	**MPBSFUSP1340**	0,11	0.24
								1		MPBSTUSP13254	MPBSFUSP13254	0,12	0.27
								1¼		MPBSTUSP13317	MPBSFUSP13317	0,12	0.26
								1½	MPBSQUSP13381			0,11	0.24
							30			**MPBSTUSP1430**	**MPBSFUSP1430**	0,15	0.33
							35			**MPBSTUSP1435**	**MPBSFUSP1435**	0,14	0.32
14	114,15	4.494	113,15	4.455	50,70	1.996	40		**MPBSQUSP1440**	**MPBSTUSP1440**	**MPBSFUSP1440**	0,14	0.30
								1		MPBSTUSP14254	MPBSFUSP14254	0,15	0.34
								1¼		MPBSTUSP14317	MPBSFUSP14317	0,15	0.32
								1½	MPBSQUSP14381	MPBSTUSP14381	MPBSFUSP14381	0,14	0.31
							30			**MPBSTUSP1530**	**MPBSFUSP1530**	0,19	0.42
							35			**MPBSTUSP1535**	**MPBSFUSP1535**	0,18	0.40
							40		**MPBSQUSP1540**	**MPBSTUSP1540**	**MPBSFUSP1540**	0,18	0.39
								1		MPBSTUSP15254	MPBSFUSP15254	0,19	0.42
15	122,17	4.810	121,50	4.783	54,70	2.154		1 3/16		MPBSTUSP15301	MPBSFUSP15301	0,19	0.41
								1¼		MPBSTUSP15317	MPBSFUSP15317	0,19	0.41
								1 7/16		MPBSTUSP15365	MPBSFUSP15365	0,18	0.40
								1½	MPBSQUSP15381	MPBSTUSP15381	MPBSFUSP15381	0,18	0.40
							30			**MPBSTUSP1630**	**MPBSFUSP1630**	0,20	0.44
							35			**MPBSTUSP1635**	**MPBSFUSP1635**	0,20	0.43
							40		**MPBSQUSP1640**	**MPBSTUSP1640**	**MPBSFUSP1640**	0,19	0.42
							45			**MPBSTUSP1645**	**MPBSFUSP1645**	0,18	0.40
16	130,19	5.126	129,20	5.087	58,80	2.315	50			**MPBSTUSP1650**	**MPBSFUSP1650**	0,17	0.38
								1		MPBSTUSP16254	MPBSFUSP16254	0,20	0.45
								1 3/16		MPBSTUSP16301	MPBSFUSP16301	0,20	0.44
								1¼		MPBSTUSP16317	MPBSFUSP16317	0,20	0.44
								1 7/16		MPBSTUSP16365	MPBSFUSP16365	0,19	0.43
								1½	MPBSQUSP16381	MPBSTUSP16381	MPBSFUSP16381	0,19	0.42

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **USPM**
- **USP**
- **LBP USPM**
- **LBP XSPM**
- **HF USPM / HFS USPM**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL



18T & 21T SPROCKETS

(for 12T, 13T,14T, 15T & 16T see previous page)

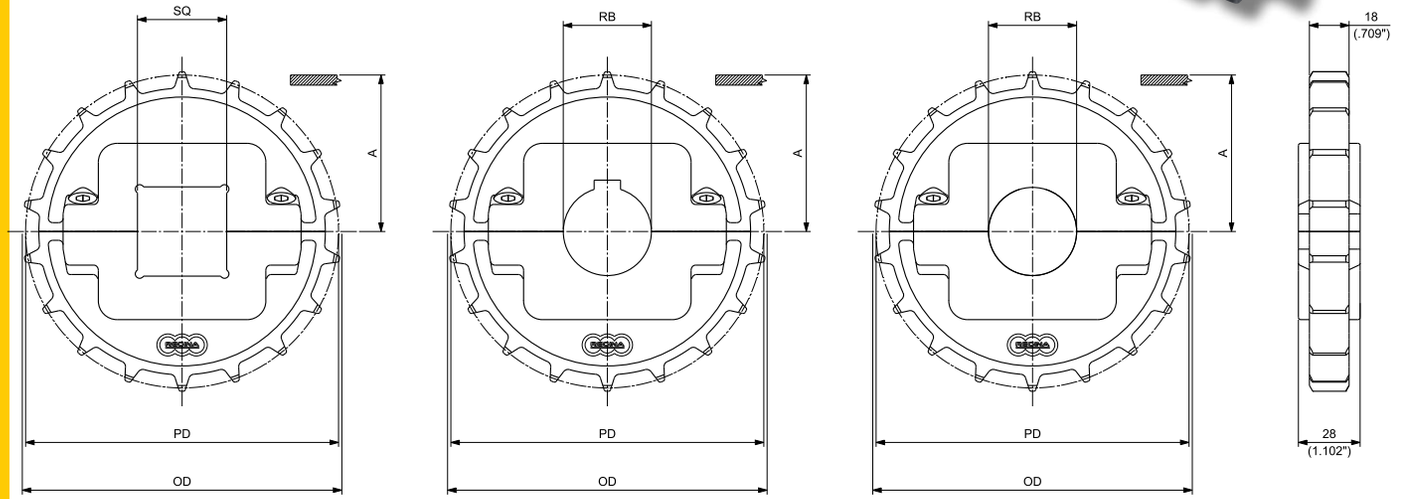

SQUARE BORE - DRIVE/IDLER

ROUND BORE - DRIVE

ROUND BORE - IDLER



MOULDED SOLID IDLER WHEELS
See page 124



MOULDED SPLIT IDLER WHEELS
SEE PAGE 195



MACHINED SPLIT IDLER WHEELS
See page 126

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ DRIVE/IDLER	PART NUMBER ROUND BORE RB DRIVE	PART NUMBER ROUND BORE RB IDLER	WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**				Kg	lbs
							30			**MPBSTUSP1830**	**MPBSFUSP1830**	0,33	0.73
							35			**MPBSTUSP1835**	**MPBSFUSP1835**	0,32	0.71
							40		**MPBSQUSP1840**	**MPBSTUSP1840**	**MPBSFUSP1840**	0,32	0.70
							45			**MPBSTUSP1845**	**MPBSFUSP1845**	0,31	0.68
							50		**MPBSQUSP1850**	**MPBSTUSP1850**	**MPBSFUSP1850**	0,30	0.66
							60		**MPBSQUSP1860**	**MPBSTUSP1860**	**MPBSFUSP1860**	0,28	0.61
18	146,27	5.759	145,00	5.709	66,79	2.629	65		**MPBSQUSP1865**			0,24	0.52
								1		**MPBSTUSP18254**	**MPBSFUSP18254**	0,34	0.74
								1 3/16		**MPBSTUSP18301**	**MPBSFUSP18301**	0,33	0.73
								1 1/4		**MPBSTUSP18317**	**MPBSFUSP18317**	0,33	0.72
								1 7/16		**MPBSTUSP18365**	**MPBSFUSP18365**	0,32	0.71
								1 1/2	**MPBSQUSP18381**	**MPBSTUSP18381**	**MPBSFUSP18381**	0,32	0.70
								2		**MPBSTUSP18508**	**MPBSFUSP18508**	0,30	0.65
							30			**MPBSTUSP2130**	**MPBSFUSP2130**	0,40	0.88
							35			**MPBSTUSP2135**	**MPBSFUSP2135**	0,39	0.86
							40		**MPBSQUSP2140**	**MPBSTUSP2140**	**MPBSFUSP2140**	0,38	0.85
							45			**MPBSTUSP2145**	**MPBSFUSP2145**	0,38	0.83
							50		**MPBSQUSP2150**	**MPBSTUSP2150**	**MPBSFUSP2150**	0,37	0.81
							60		**MPBSQUSP2160**	**MPBSTUSP2160**	**MPBSFUSP2160**	0,34	0.76
21	170,42	6.709	170,00	6.693	78,84	3.104	65		**MPBSQUSP2165**			0,31	0.67
								1		**MPBSTUSP21254**	**MPBSFUSP21254**	0,40	0.89
								1 3/16		**MPBSTUSP21301**	**MPBSFUSP21301**	0,40	0.88
								1 1/4		**MPBSTUSP21317**	**MPBSFUSP21317**	0,40	0.88
								1 7/16		**MPBSTUSP21365**	**MPBSFUSP21365**	0,39	0.86
								1 1/2	**MPBSQUSP21381**	**MPBSTUSP21381**	**MPBSFUSP21381**	0,39	0.85
								2		**MPBSTUSP21508**	**MPBSFUSP21508**	0,36	0.80

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

12,7 mm (0.5") THICKNESS
SOLID TOP


NEW




Strong hinge design ensures high mechanical strength for the most demanding applications.
Optimized edge radius and no gap between hinges allows for a superior product handling in linear and side transfer of products.
Particularly suitbale for glass products and cans.

DUPONT® KEVLAR® INSIDE

VERSION WITHOUT TRACKING GUIDE

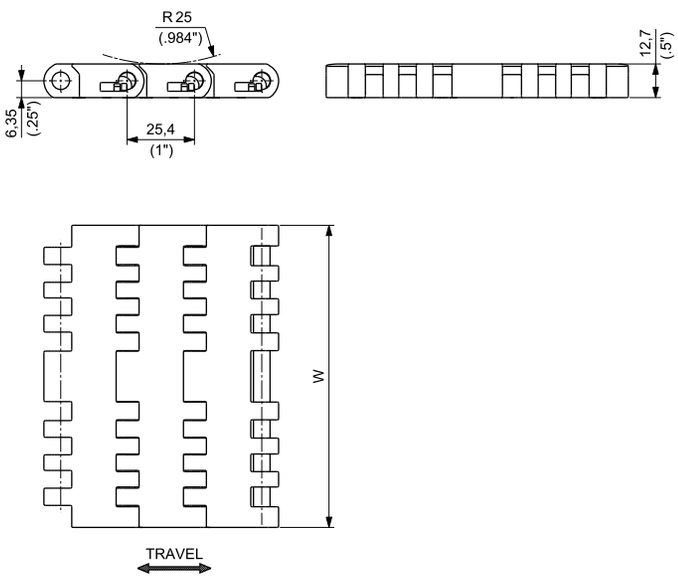

VERSION WITH TRACKING GUIDE

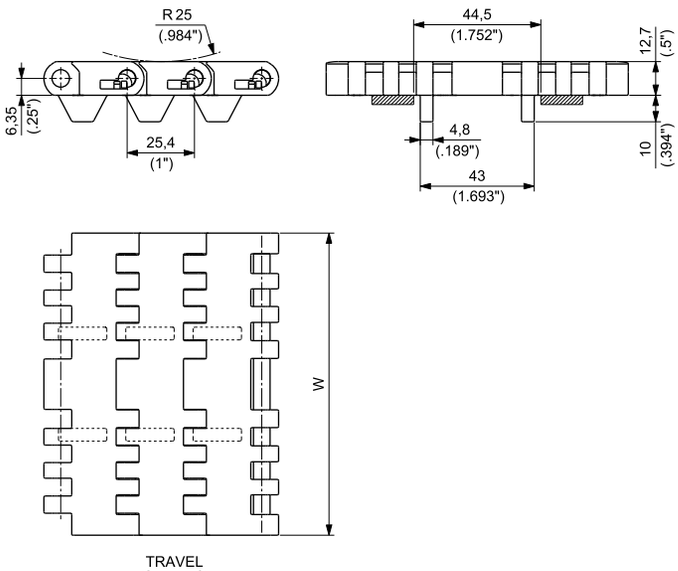


Materials see page 14
Sprockets see pages 252÷253
Applications see page 24

MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP			1305 UP 325	1305UPKD/000	82,6	3.25	12,7	0.50	3100	697	1,17	0.79
			1305 UP 450	1305UPKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,63	1.10
			1305 UP 600	1305UPKH/000	152,4	6.00	12,7	0.50	6600	1,484	2,13	1.43
			1305 UP 750	1305UPKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,68	1.80
			1305 UP 1500	1305UPKZ/000	381,0	15.00	12,7	0.50	15200	3,417	5,39	3.62
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	PBT	WITHOUT TRACKING GUIDE	1305 D2K 325	1305D2KKD/000	82,6	3.25	12,7	0.50	3100	697	1,17	0.79
			1305 D2K 450	1305D2KKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,63	1.10
			1305 D2K 600	1305D2KKH/000	152,4	6.00	12,7	0.50	6600	1,484	2,13	1.43
			1305 D2K 750	1305D2KKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,68	1.80
			1305 D2K 1500	1305D2KKZ/000	381,0	15.00	12,7	0.50	15200	3,417	5,39	3.62
ABRASION RESISTANT POLYAMIDE [1] AR			1305 AR 325	1305ARKD/000	82,6	3.25	12,7	0.50	3100	697	1,13	0.76
			1305 AR 450	1305ARKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,57	1.06
			1305 AR 600	1305ARKH/000	152,4	6.00	12,7	0.50	6600	1,484	2,06	1.38
			1305 AR 750	1305ARKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,59	1.74
			1305 AR 1500	1305ARKZ/000	381,0	15.00	12,7	0.50	15200	3,417	5,20	3.50
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP			1305G UP 325	1305GUPKD/000	82,6	3.25	12,7	0.50	3100	697	1,28	0.86
			1305G UP 450	1305GUPKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,73	1.16
			1305G UP 750	1305GUPKL/000	190,5	7.50	12,7	0.50	7800	1284	2,78	1.87
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	PBT	WITH TRACKING GUIDE	1305G D2K 325	1305GD2KKD/000	82,6	3.25	12,7	0.50	3100	697	1,28	0.86
			1305G D2K 450	1305GD2KKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,73	1.16
			1305G D2K 750	1305GD2KKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,78	1.87
ABRASION RESISTANT POLYAMIDE[1] AR			1305G AR 325	1305GARKD/000	82,6	3.25	12,7	0.50	3100	697	1,24	0.82
			1305G AR 450	1305GARKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,67	1.12
			1305G AR 750	1305GARKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,68	1.80

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

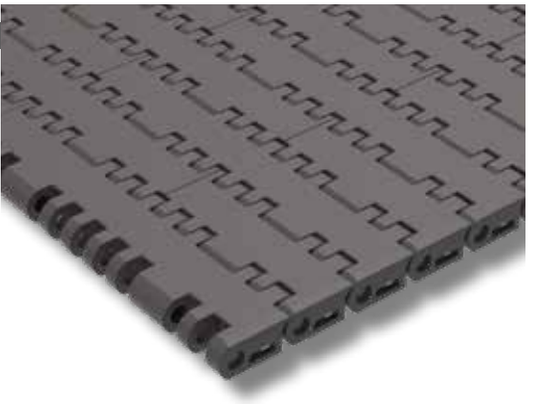


12,7 mm (0.5") THICKNESS
SOLID TOP

NEW

Strong hinge design ensures high mechanical strength for the most demanding applications.
Optimized edge radius and no gap between hinges allows for a superior product handling in linear and side transfer of products.

- **Belt widths:** 228,6 mm (9") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 43100 N/m (2,952 lbs/ft) for UP, DK2™ and AR materials
- **Belt weight:** 13,88 kg/m² (2.84 lbs/ft²) for UP and DK2™ materials
  13,37 kg/m² (2.74 lbs/ft²) for AR material

DUPONT® KEVLAR® INSIDE

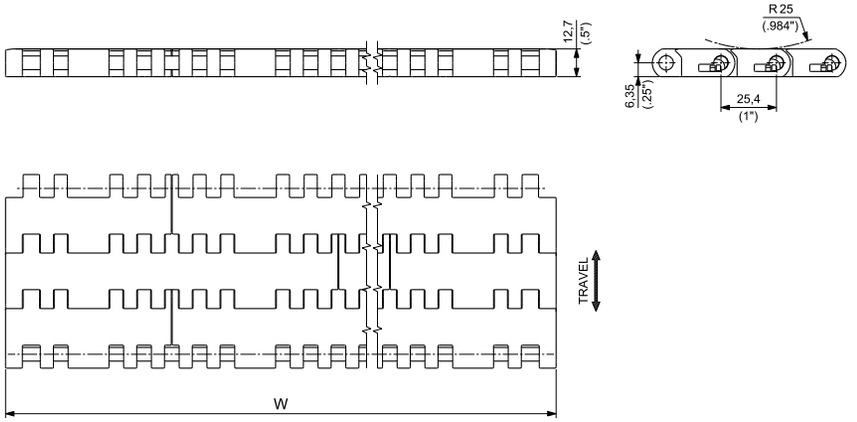

Materials see page 14
Sprockets see pages 252÷253
Applications see page 24

WIDTH W		MATERIALS			
		Module			Pin
		UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®	DK2™ SPECIAL DELRIN ® REINFORCED WITH KEVLAR ®	AR ABRASION RESISTANT POLYAMIDE(1)	
mm	inch	PART NUMBER	PART NUMBER	PART NUMBER	
228,60	9.0	**1305UP009**	**1305D2K009**	**1305AR009**	
304,80	12.0	**1305UP012**	**1305D2K012**	**1305AR012**	
381,00	15.0	**1305UP015**	**1305D2K015**	**1305AR015**	
457,20	18.0	**1305UP018**	**1305D2K018**	**1305AR018**	
533,40	21.0	**1305UP021**	**1305D2K021**	**1305AR021**	
609,60	24.0	**1305UP024**	**1305D2K024**	**1305AR024**	
685,80	27.0	**1305UP027**	**1305D2K027**	**1305AR027**	
762,00	30.0	**1305UP030**	**1305D2K030**	**1305AR030**	
838,20	33.0	**1305UP033**	**1305D2K033**	**1305AR033**	
914,40	36.0	**1305UP036**	**1305D2K036**	**1305AR036**	PBT
996,60	39.0	**1305UP039**	**1305D2K039**	**1305AR039**	
1066,80	42.0	**1305UP042**	**1305D2K042**	**1305AR042**	
1143,00	45.0	**1305UP045**	**1305D2K045**	**1305AR045**	
1219,20	48.0	**1305UP048**	**1305D2K048**	**1305AR048**	
1295,40	51.0	**1305UP048**	**1305D2K051**	**1305AR051**	
1371,60	54.0	**1305UP054**	**1305D2K054**	**1305AR054**	
1447,80	57.0	**1305UP057**	**1305D2K057**	**1305AR057**	
1524,00	60.0	**1305UP060**	**1305D2K060**	**1305AR060**	

(1) ACTUAL WIDTH CAN BE UP TO 1% GREATER THAN NOMINAL WIDTH


Belts wider than 1524 mm (60") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width. Example: for a 63" wide belt (=60+3 inches), the PN for UP material is "1305UP063".

Standard packaging:
Belt widths ≤ 609,6 mm (24") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 685,8 mm (27") and ≤ 990,6 mm (39") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 1066,8 mm (42") are supplied in the lenght requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


ACTIVE TRANSFER MODULES
12,7 mm (0.5") THICKNESS
SOLID TOP


NEW

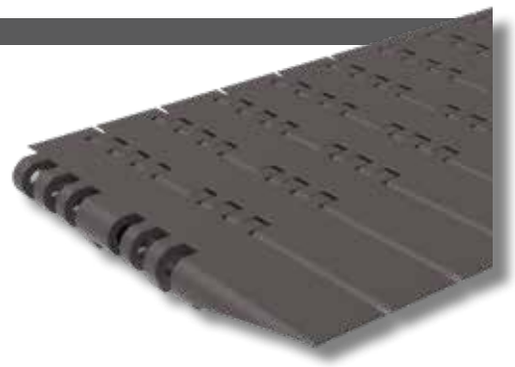



To be used in combination with 1305 belt series.
Active transfer modules 1305G ATM series allow the transfer of the products between two 90° conveyor tracks without using dead plates. The special module profile, wing shaped, supports the products dynamically during transfer on the take-away belt. Available left and right version.

DUPONT® KEVLAR® INSIDE

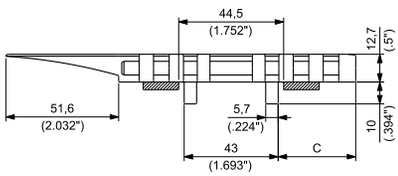

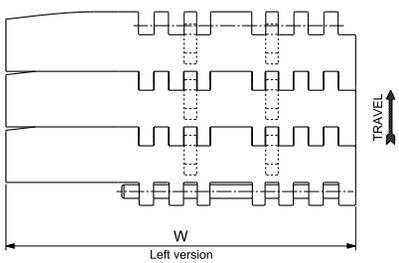

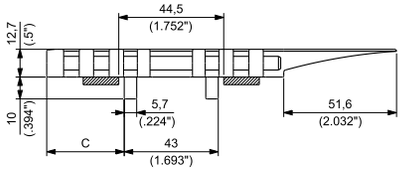

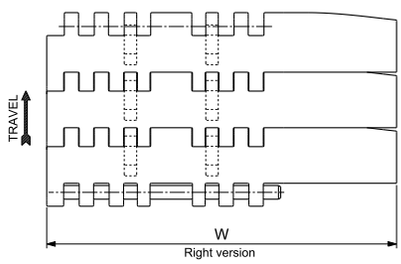

Materials see page 14
Sprockets see pages 252÷253
Applications see page 24

1305G ATM - Left Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	1305G ATM UP 450 LH	1305GATMUP450LH	160,0	6.3	12,7	0.5	4600	1,034	1,90	1.28
		1305G ATM UP 750 LH	1305GATMUP750LH	236,2	9.3	12,7	0.5	7800	1,753	2,96	2.99
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKT™		1305G ATM D2K 450 LH	1305GATMD2K450LH	160,0	6.3	12,7	0.5	4600	1,034	1,90	1.28
		1305G ATM D2K 750 LH	1305GATMD2K750LH	236,2	9.3	12,7	0.5	7800	1,753	2,96	2.99
ABRASION RESISTANT POLYAMIDE [1] AR		1305G ATM AR 450 LH	1305GATMAR450LH	160,0	6.3	12,7	0.5	4600	1,034	1,90	1.23
		1305G ATM AR 750 LH	1305GATMAR750LH	236,2	9.3	12,7	0.5	7800	1,753	2,96	2.92

1305G ATM - Right Version

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	1305G ATM UP 450 RH	1305GATMUP450RH	160,0	6.3	12,7	0.5	4600	1,034	1,90	1.28
		1305G ATM UP 750 RH	1305GATMUP750RH	236,2	9.3	12,7	0.5	7800	1,753	2,96	2.99
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKT™		1305G ATM D2K 450 RH	1305GATMD2K450RH	160,0	6.3	12,7	0.5	4600	1,034	1,90	1.28
		1305G ATM D2K 750 RH	1305GATMD2K750R	236,2	9.3	12,7	0.5	7800	1,753	2,96	2.99
ABRASION RESISTANT POLYAMIDE [1] AR		1305G ATM AR 450 RH	1305GATMAR450RH	160,0	6.3	12,7	0.5	4600	1,034	1,90	1.23
		1305G ATM AR 750 RH	1305GATMAR750RH	236,2	9.3	12,7	0.5	7800	1,753	2,96	2.92

[1] ACTUAL WIDTH CAN BE UP TO 0,5% GREATER THAN NOMINAL WIDTH

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


12,7 mm (0.5") THICKNESS
PERFORATED TOP

NEW




Top surface with perforated design used to ensure the flow of water or air through the belt and to remove debris, for a cleaner contact surface between belt and container.
Particularly suitable for cans conveying.

VERSION WITHOUT TRACKING GUIDE

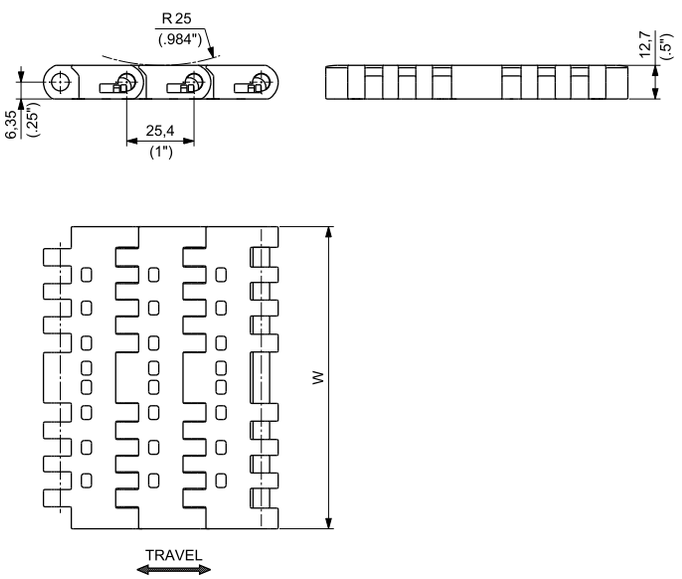

VERSION WITH TRACKING GUIDE

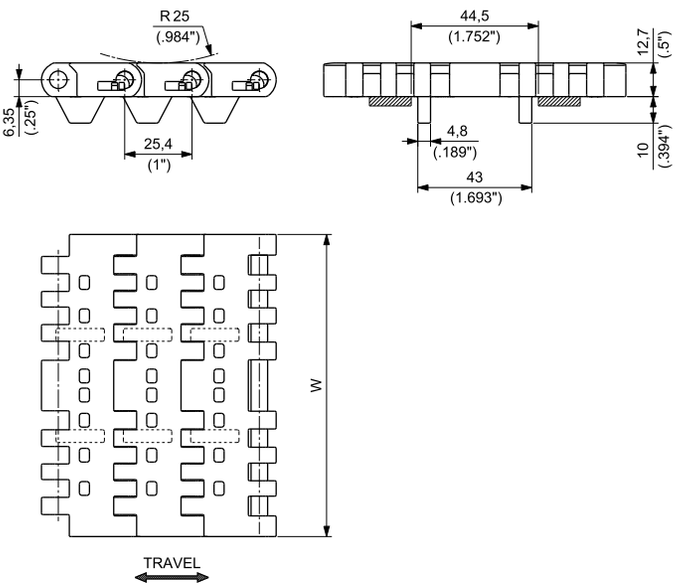

Materials see page 14
Sprockets see pages 252÷253
Applications see page 24

MATERIALS		VERSION	ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	WITHOUT TRACKING GUIDE	1405 UP 325	1405UPKD/000	82,6	3.25	12,7	0.50	3100	697	1,14	0.77
			1405 UP 450	1405UPKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,58	1.06
			1405 UP 600	1405UPKH/000	152,4	6.00	12,7	0.50	6600	1,484	2,08	1.40
			1405 UP 750	1405UPKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,61	1.75
			1405 UP 1500	1405UPKZ/000	381,0	15.00	12,7	0.50	15200	3,417	5,27	3.54
		WITH TRACKING GUIDE	1405G UP 325	1405GUPKD/000	82,6	3.25	12,7	0.50	3100	697	1,25	0.80
			1405G UP 450	1405GUPKG/000	114,3	4.50	12,7	0.50	4600	1,034	1,69	1.14
			1405G UP 750	1405GUPKL/000	190,5	7.50	12,7	0.50	7800	1,753	2,72	1.83

Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




12,7 mm (0.5") THICKNESS
PERFORATED TOP

NEW

Top surface with perforated design used to ensure the flow of water or air through the belt and to remove debris, for a cleaner contact surface between belt and container.
Particularly suitable for cans conveying.

- **Belt widths:** 228,6 mm (9") or wider in 76,2 mm (3") increments
- **Working Load (at 25°C/77°F):** 43100 N/m (2,952 lbs/ft)
- **Belt weight:** 13,54 kg/m² (2.77lbs/ft²)

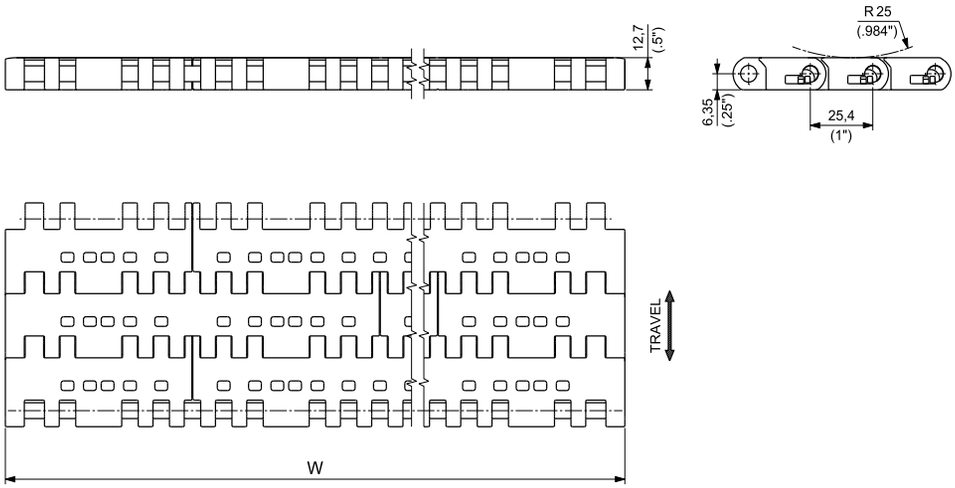

Materials see page 14
Sprockets see pages 252÷253
Applications see page 24

WIDTH W		MATERIALS	
		Module	Pin
mm	inch	UP ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®	
		PART NUMBER	
228,6	9.0	**1405UP009**	PBT
304,8	12.0	**1405UP012**	
381,0	15.0	**1405UP015**	
457,2	18.0	**1405UP018**	
533,4	21.0	**1405UP021**	
609,6	24.0	**1405UP024**	
685,8	27.0	**1405UP027**	
762,0	30.0	**1405UP030**	
838,2	33.0	**1405UP033**	
914,4	36.0	**1405UP036**	
990,6	39.0	**1405UP039**	
1066,8	42.0	**1405UP042**	
1143,0	45.0	**1405UP045**	
1219,2	48.0	**1405UP048**	
1295,4	51.0	**1405UP051**	
1371,6	54.0	**1405UP054**	
1447,8	57.0	**1405UP057**	
1524,0	60.0	**1405UP060**	

Belts wider than 1524 mm (60") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 63" wide belt (=60+3 inches), the PN is "1405UP063".

Standard packaging:
Belt widths ≤ 609,6 mm (24") are supplied in rolls of 3,048 m (10 ft) each.
Belt widths ≥ 685,8 mm (27") and ≤ 990,6 mm (39") are supplied in rolls of 1,524 m (5 ft) each.
Belt widths ≥ 1066,8 mm (42") are supplied in the lenght requested by the customer.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUITABLE FOR CHAINS:

- **1305**
- **1405**


MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

NEW

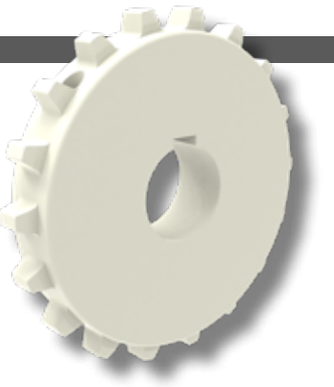


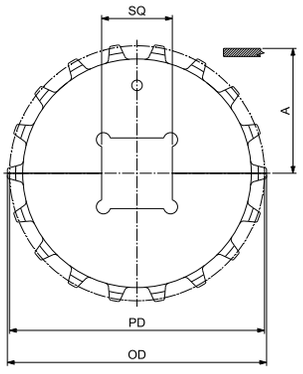


SQUARE BORE - DRIVE/ IDLER

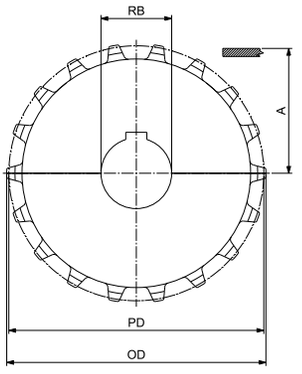

ROUND BORE - DRIVE

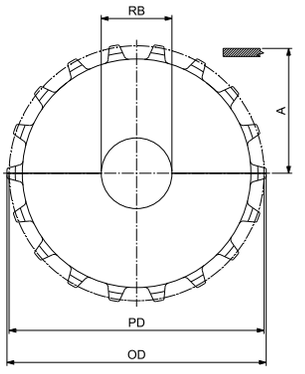

ROUND BORE - IDLER



MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SB	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
16	130,20	5.126	103,60	5.142	58,75	2.313	30			MPBAST13051630	MPBASF13051630	0,33	0.73
							35			MPBAST13051635		0,32	0.71
							40		MPBASQ13051640	MPBAST13051640	MPBASF13051640	0,31	0.68
								1		MPBAST130516254	MPBASF130516254	0,34	0.75
								1¼		MPBAST130516317	MPBASF130516317	0,33	0.73
								1⅜		MPBAST130516349	MPBASF130516349	0,32	0.71
								1⁷⁄₁₆		MPBAST130516365	MPBASF130516365	0,32	0.71
								1½	MPBASQ130516381	MPBAST130516381	MPBASF130516381	0,32	0.71
17	138,23	5.442	139.40	5.488	62,77	2.414	30			MPBAST13051730	MPBASF13051730	0,37	0.82
							35			MPBAST13051735		0,36	0.79
							40		MPBASQ13051740	MPBAST13051740	MPBASF13051740	0,35	0.77
								1		MPBAST130517254	MPBASF130517254	0,38	0.84
								1¼		MPBAST130517317	MPBASF130517317	0,37	0.82
								1⅜		MPBAST130517349	MPBASF130517349	0,36	0.79
								1⁷⁄₁₆		MPBAST130517365	MPBASF130517365	0,36	0.79
								1½	MPBASQ130517381	MPBAST130517381	MPBASF130517381	0,36	0.79
18	146,27	5.759	147,40	5.803	66,79	2.629	30			MPBAST13051830	MPBASF13051830	0,42	0.93
							35			MPBAST13051835	MPBASF13051835	0,41	0.90
							40		MPBASQ13051840	MPBAST13051840	MPBASF13051840	0,40	0.88
							50			MPBAST13051850		0,38	0.84
							60		MPBASQ13051860	MPBAST13051860		0,35	0.77
							65		MPBASQ13051865			0,34	0.75
								1		MPBAST130518254	MPBASF130518254	0,43	0.95
								1¼		MPBAST130518317	MPBASF130518317	0,42	0.93
								1⅜		MPBAST130518349	MPBASF130518349	0,41	0.90
								1⁷⁄₁₆		MPBAST130518365	MPBASF130518365	0,41	0.90
								1½	MPBASQ130518381	MPBAST130518381	MPBASF130518381	0,41	0.90
								2	MPBASQ130518508	MPBAST130518508	MPBASF130518508	0,38	0.84

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUITABLE FOR CHAINS:

- **1305**
- **1405**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS

NEW

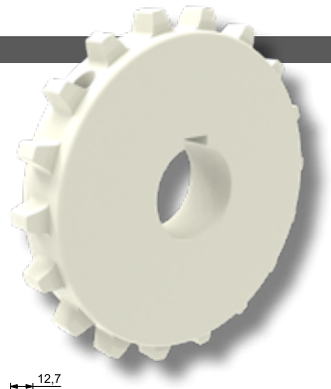

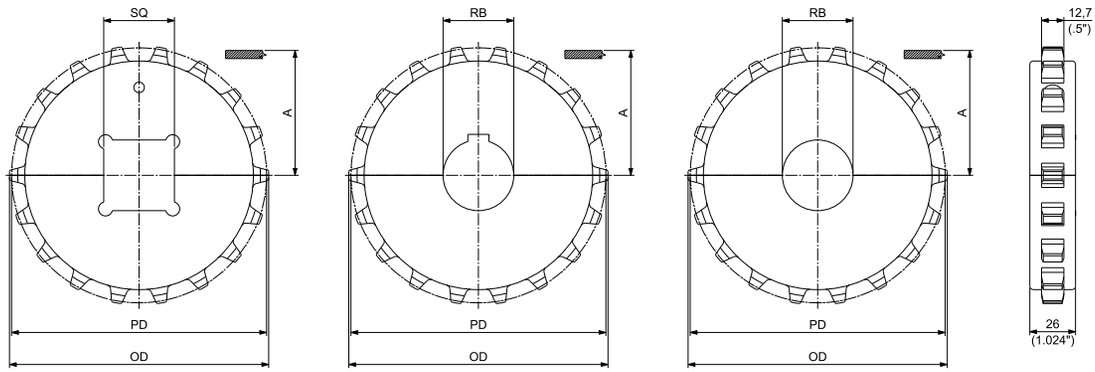

SQUARE BORE - DRIVE/ IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
							30			**MPBAST13051930**	**MPBASF13051930**	0,47	1.04
							35			**MPBAST13051935**	**MPBASF13051935**	0,46	1.01
							40		**MPBASQ13051940**	**MPBAST13051940**	**MPBASF13051940**	0,45	0.99
							50		**MPBASQ13051950**	**MPBAST13051950**		0,43	0.95
							60		**MPBASQ13051960**			0,39	0.86
19	154,32	6.076	155,40	6.118	70,81	2.788	65		**MPBASQ13051965**			0,37	0.82
								1		MPBAST130519254	MPBASF130519254	0,34	0.75
								1¼		MPBAST130519317	MPBASF130519317	0,33	0.73
								1⅜		MPBAST130519349	MPBASF130519349	0,32	0.71
								1⁷⁄₁₆		MPBAST130519365	MPBASF130519365	0,32	0.71
								1½		MPBAST130519381	MPBASF130519381	0,32	0.71
							30			**MPBAST13052030**	**MPBASF13052030**	0,53	1.17
							35			**MPBAST13052035**	**MPBASF13052035**	0,52	1.15
							40		**MPBASQ13052040**	**MPBAST13052040**	**MPBASF13052040**	0,51	1.12
							50		**MPBASQ13052060**	**MPBAST13052050**		0,49	1.08
							60		**MPBASQ13052065**	**MPBAST13052060**		0,46	1.01
20	162,37	6.393	163,50	6.437	70,84	2.946	65					0,42	0.93
								1		MPBAST130520254	MPBASF130520254	0,54	1.19
								1¼		MPBAST130520317	MPBASF130520317	0,53	1.17
								1⅜		MPBAST130520349	MPBASF130520349	0,52	1.15
								1⁷⁄₁₆		MPBAST130520365	MPBASF130520365	0,52	1.15
								1½		MPBAST130520381	MPBASF130520381	0,52	1.15
							30			**MPBAST13052130**	**MPBASF13052130**	0,59	1.30
							35			**MPBAST13052135**	**MPBASF13052135**	0,58	1.28
							40		**MPBASQ13052140**	**MPBAST13052140**	**MPBASF13052140**	0,57	1.26
							50		**MPBASQ13052150**	**MPBAST13052150**		0,55	1.21
							60		**MPBASQ13052160**	**MPBAST13052160**		0,52	1.15
21	170,42	6.709	171,60	6.756	78,86	3.105	65		**MPBASQ13052165**			0,48	1.06
								1		MPBAST130521254	MPBASF130521254	0,60	1.32
								1¼		MPBAST130521317	MPBASF130521317	0,59	1.30
								1⅜		MPBAST130521349	MPBASF130521349	0,58	1.28
								1⁷⁄₁₆	MPBASQ130521365	MPBAST130521365	MPBASF130521365	0,58	1.28
								1½	MPBASQ130521381	MPBAST130521381	MPBASF130521381	0,58	1.28
								2	MPBASQ130521508	MPBAST130521508	MPBASF130521508	0,48	1.06

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

1″ Pitch Sideflexing Chains



1" PITCH LIGHT DUTY SIDEFLEXING CHAINS - **783T, 783M AND 782M SERIES**

INDUSTRIES AND APPLICATIONS

Suitable for handling loose products, such as plastic & glass bottles and aluminium & steel cans in the following industries and applications.



INDUSTRIES

Bottling and canning

Container manufacturing

Consumer goods


APPLICATIONS

Single lane & mass conveying

Pressureless inliners and combiners

FEATURES

- 783 and 782 series can be used on conveyors side by side with 600, 610, 500, 300, 200, 1500, 1600, 7200, 7300 series due to the same thickness of 8,7mm for easy installation and standardization of wearstrips.
- Tab chains 783T series use the same curves as Fitetop plastic chains 880T, 879T series and Flitetop steel chains 881T and 981T series.

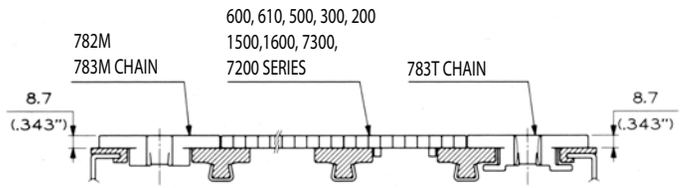

1" PITCH HEAVY DUTY SIDEFLEXING CHAINS - **793T, 793M AND 793L SERIES**

INDUSTRIES AND APPLICATIONS

Suitable for handling loose products, such as plastic & glass bottles and aluminium & steel cans in the following industries and applications.

INDUSTRIES

Bottling and canning

Container manufacturing
(in particular glass manufacturing)

Consumer goods

APPLICATIONS


Single lane & mass conveying

Pressureless Inliners and combiners



FEATURES

- 793 series can be used on conveyors side by side with USP, USPM, 1305, UCC series due to the same thickness of 12,7 mm for easy installation and standardization of wearstrips.
- Tab chains 793T series use the same curves as Flitetop plastic chains 880T, 879T series and steel chains 881T and 981T series.

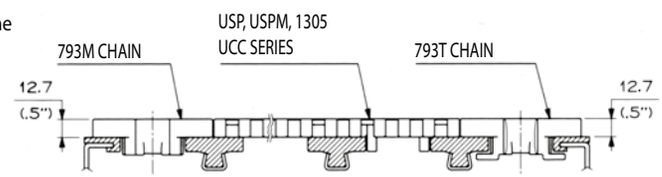


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
8,7 mm (0.343") THICKNESS
SOLID TOP
LIGHT DUTY



DUPONT® KEVLAR® INSIDE

ECOLOGICAL FRICTION ABATING THERMO-PLASTIC

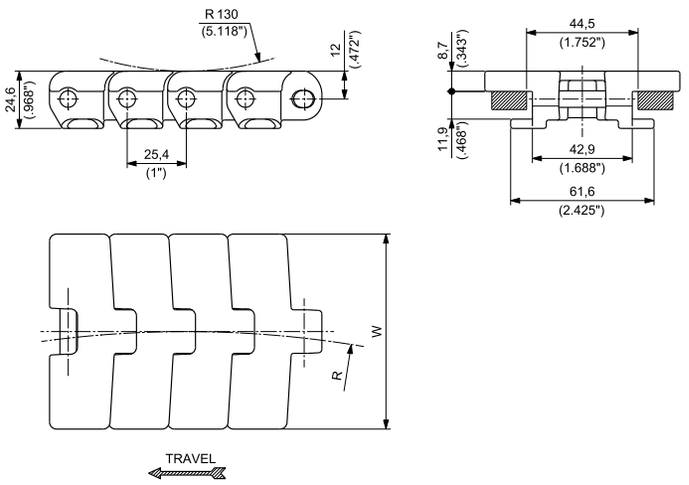

Materials see page 14
Sprockets see page 261
Corner tracks see page 342
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	Inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP		UP 783T K 3 ¼	UP783TKD/000	82,6	3.25	8,7	0.343	457,2	18	1700	382	1,76	1.19
		UP 783T K 83,8	UP783TKRA/000	83,8	3.30	8,7	0.343	457,2	18	1700	382	1,78	1.19
		UP 783T K 4 ½	UP783TKG/000	114,3	4.50	8,7	0.343	609,6	24	1700	382	2,04	1.37
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 783T K 3 ¼	D2K783TKD/000	82,6	3.25	8,7	0.343	457,2	18	1700	382	1,76	1.19
		D2K 783T K 83,8	D2K783TKRA/000	83,8	3.30	8,7	0.343	457,2	18	1700	382	1,78	1.19
		D2K 783T K 4 ½	D2K783TKG/000	114,3	4.50	8,7	0.343	609,6	24	1700	382	2,04	1.37
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.®		EF 783T K 3 ¼	EF783TKD/000	82,6	3.25	8,7	0.343	457,2	18	1700	382	1,76	1.19
		EF 783T K 83,8	EF783TKRA/000	83,8	3.30	8,7	0.343	457,2	18	1700	382	1,78	1.19
		EF 783T K 4 ½	EF783TKG/000	114,3	4.50	8,7	0.343	609,6	24	1700	382	2,04	1.37

Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


MAGNETIC
8,7 mm (0.343") THICKNESS
SOLID TOP (783M) AND FLUSH GRID (782M)
LIGHT DUTY

DUPONT® KEVLAR® INSIDE


e-F.A.S.T. ECOLOGICAL FRICTION ABATING THERMO-PLASTIC



783M - SOLID TOP SURFACE

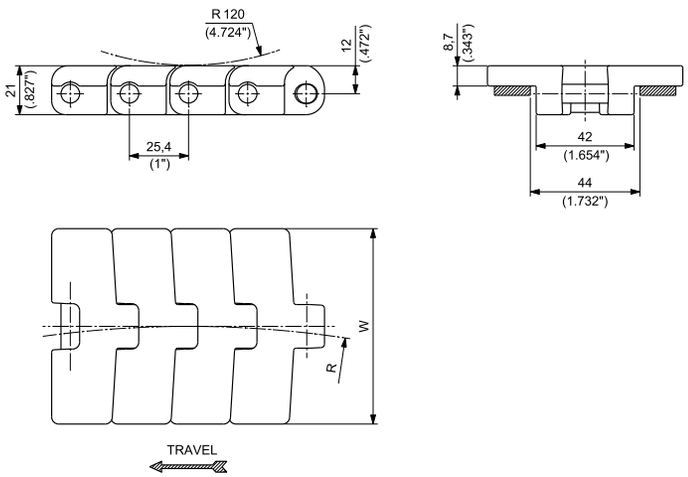

782M - FLUSH GRID SURFACE

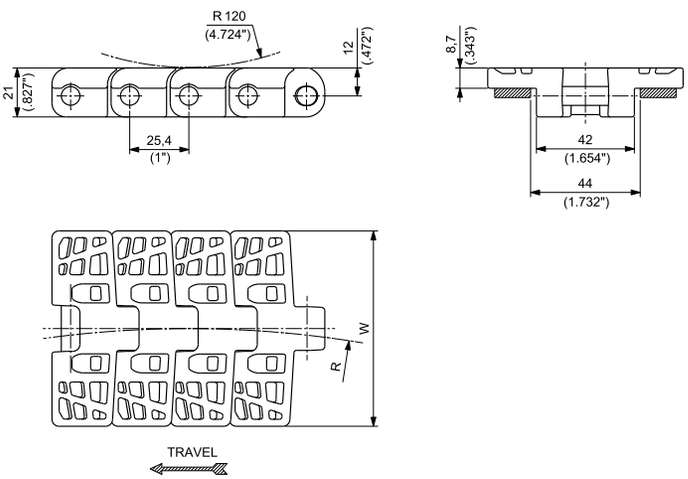

Materials see page 14
Sprockets see page 261
Corner tracks see page 301
Applications see page 24

MATERIALS		SURFACE	ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin				mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	MAGNETIC STAINLESS STEEL	SOLID TOP	UP 783M K 83,8	UP783MKRA/000	83,8	3.30	8,7	0.343	500	19.69	1700	382	1,82	1.22
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™			D2K 783M K 83,8	D2K783MKRA/000	83,8	3.30	8,7	0.343	500	19.69	1700	382	1,82	1.22
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.			EF 783M K 83,8	EF783MKRA/000	83,8	3.30	8,7	0.343	500	19.69	1700	382	1,82	1.22
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP		FLUSH GRID	UP 782M K 83,8	UP782MKRA/000	83,8	3.30	8,7	0.343	500	19.69	1700	382	1,71	1.15
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™			D2K 782M K 83,8	D2K782MKRA/000	83,8	3.30	8,7	0.343	500	19.69	1700	382	1,71	1.15
NEW ECOLOGICAL FRICTION ABATING THERMOPLASTIC e-F.A.S.T.			EF 782M K 83,8	EF782MKRA/000	83,8	3.30	8,7	0.343	500	19.69	1700	382	1,71	1.15


Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TAB
12,7 mm (0.5") THICKNESS
SOLID TOP
HEAVY DUTY



DUPONT® KEVLAR® INSIDE

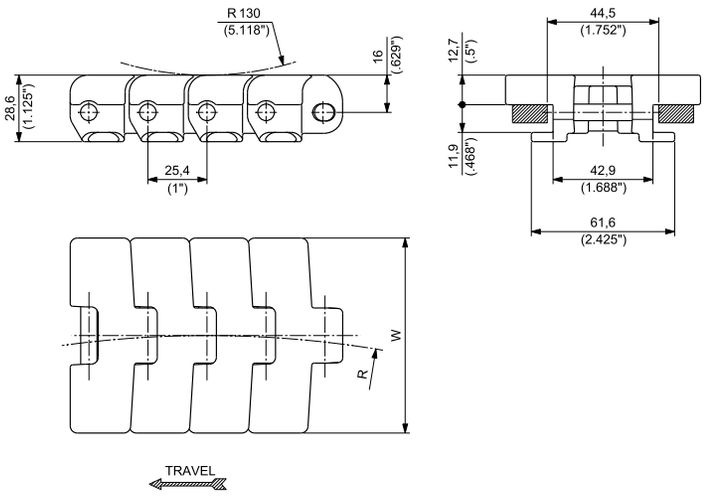

Materials see page 14
Sprockets see page 261
Corner tracks see page 342
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 793T K 3 ¼	UP793TKD/000	82,6	3.25	12,7	0.50	457,2	18	2200	495	2,09	1.41
		UP 793T K 83,8	UP793TKRA/000	83,8	3.30	12,7	0.50	457,2	18	2200	495	2,11	1.42
		UP 793T K 4 ½	UP793TKG/000	114,3	4.50	12,7	0.50	609,6	24	2200	495	2,48	1.67
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		D2K 793T K 3 ¼	D2K793TKD/000	82,6	3.25	12,7	0.50	457,2	18	2200	495	2,09	1.41
		D2K 793T K 83,8	D2K793TKRA/000	83,8	3.30	12,7	0.50	457,2	18	2200	495	2,11	1.42
		D2K 793T K 4 ½	D2K793TKG/000	114,3	4.50	12,7	0.50	609,6	24	2200	495	2,48	1.67
ABRASION RESISTANT POLYAMIDE AR		AR 793T K 3 ¼	AR793TKD/000	82,6	3.25	12,7	0.50	457,2	18	2200	495	2,02	1.36
		AR 793T K 83,8	AR793TKRA/000	83,8	3.30	12,7	0.50	457,2	18	2200	495	2,04	1.37
		AR 793T K 4 ½	AR793TKG/000	114,3	4.50	12,7	0.50	609,6	24	2200	495	2,40	1.61


Standard packaging:
Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MAGNETIC
12,7 mm (0.5") THICKNESS
SOLID TOP
HEAVY DUTY

DUPONT® KEVLAR® INSIDE



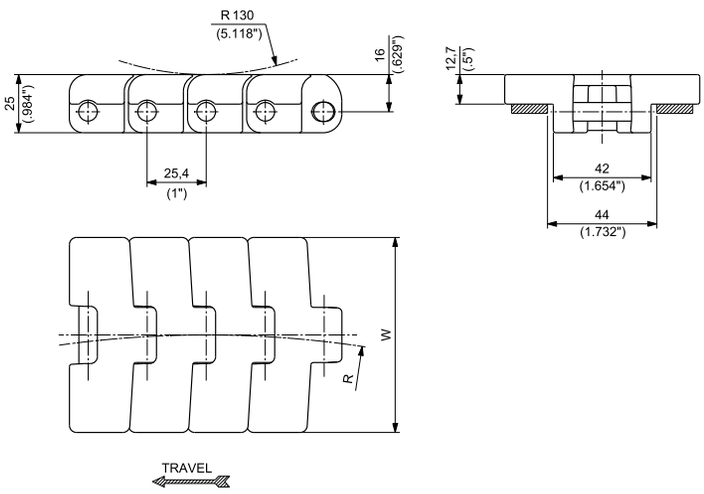

Materials see page 14
Sprockets see page 261
Corner tracks see page 301
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN® UP	MAGNETIC STAINLESS STEEL	UP 793M K 83,8	UP793MKRA/000	83,8	3.30	12,7	0.50	500	19.685	2200	495	2,10	1.41
		UP 793M K 4 ½	UP793MKG/000	114,3	4.50	12,7	0.50	500	19.685	2200	495	2,46	1.65
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DKF™		D2K 793M K 83,8	D2K793MKRA/000	83,8	3.30	12,7	0.50	500	19.685	2200	495	2,10	1.41
		D2K 793M K 4 ½	D2K793MKG/000	114,3	4.50	12,7	0.50	500	19.685	2200	495	2,46	1.65
ABRASION RESISTANT POLYAMIDE AR		AR 793M K 83,8	AR793MKRA/000	83,8	3.30	12,7	0.50	500	19.685	2200	495	2,04	1.37
		AR 793M K 4 ½	AR793MKG/000	114,3	4.50	12,7	0.50	500	19.685	2200	495	2,38	1.60

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved





LOW PIN CENTER
12,7 mm (0.5") THICKNESS
SOLID TOP
HEAVY DUTY

The special Low Pin Center chain design holds the chains down flat and level in the curves, unlike conventional beveled and TAB chain styles, which lift up on the outer edges. This eliminates product tippage, especially on multi-strand conveyors. All of this comes without the extra cost of magnetic corner tracks.
These chains can simply be lifted anywhere in the carry track for easy cleaning and maintenance.

DUPONT® KEVLAR® INSIDE

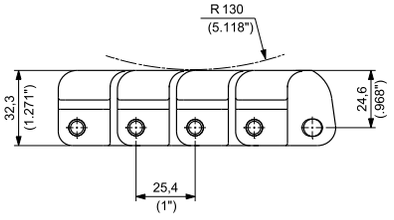



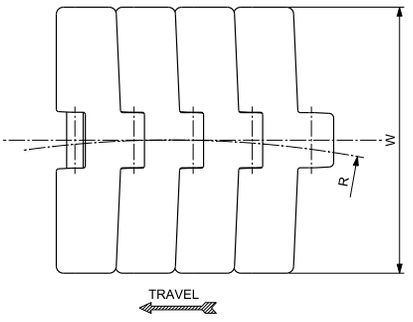

Materials see page 14
Sprockets see page 261
Corner tracks see page 350
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		SIDEFLEXING RADIUS R		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	AUSTENITIC STAINLESS STEEL	UP 793L K 4 ½	UP793LKG/000	114,3	4.5	12,7	0.50	609,6	24	2200	495	2,55	1.71
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™	AUSTENITIC STAINLESS STEEL	D2K 793L K 4 ½	D2K793LKG/000	114,3	4.5	12,7	0.50	609,6	24	2200	495	2,55	1.71

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **782M**
- **783M**
- **783T**
- **793M**
- **793T**
- **793L**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL




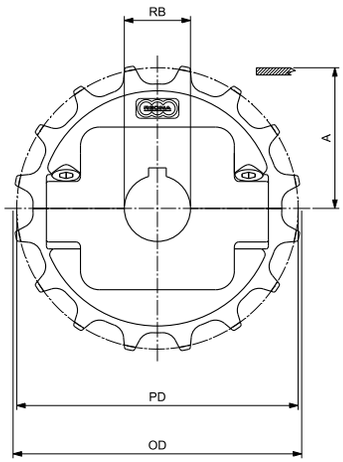

ROUND BORE - DRIVE

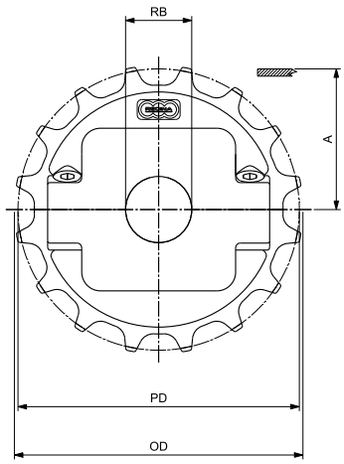

ROUND BORE - IDLER





MOULDED SOLID IDLER WHEELS FOR 782M, 783M, 793M CHAINS
See page 124



MOULDED SPLIT IDLER WHEELS FOR 782M, 783M, 793M CHAINS
SEE PAGE 195



MACHINED SPLIT IDLER WHEELS FOR 782M, 783M, 793M CHAINS
See page 126

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD mm	PD inch	OUTSIDE DIAMETER OD mm	OD inch	WEAR STRIP POSITIONING A mm	A inch	BORE SIZE* mm	BORE SIZE* inch**	PART NUMBER ROUND BORE RB DRIVE	PART NUMBER ROUND BORE RB IDLER	WEIGHT Kg	WEIGHT lbs
16	130,20	5.126	131,30	5.169	68,40	2.693	25		**CMT027821601**	**CMT037821601**	0,26	0.58
							30		**CMT027821602**	**CMT037821602**	0,26	0.57
							35		**CMT027821603**	**CMT037821603**	0,25	0.56
							40		**CMT027821604**	**CMT037821604**	0,24	0.54
							45		**CMT027821605**	**CMT037821605**	0,24	0.52
							50		**CMT027821613**	**CMT037821613**	0,23	0.50
								1	CMT027821606	CMT037821606	0,26	0.58
					77,00 (for 793L chain only)	3.031		1 3/16	CMT027821607	CMT037821607	0,26	0.57
								1 1/4	CMT027821608	CMT037821608	0,26	0.57
								1 3/8	CMT027821611	CMT037821611	0,25	0.56
								1 7/16	CMT027821609	CMT037821609	0,25	0.55
								1 1/2	CMT027821610	CMT037821610	0,25	0.55
18	146,27	5.759	147,60	5.811	76,44	3.009	25		**CMT027821801**	**CMT037821801**	0,29	0.63
							30		**CMT027821802**	**CMT037821802**	0,28	0.62
							35		**CMT027821803**	**CMT037821803**	0,28	0.61
							40		**CMT027821804**	**CMT037821804**	0,27	0.59
							45		**CMT027821805**	**CMT037821805**	0,26	0.58
							50		**CMT027821813**	**CMT037821813**	0,25	0.56
								1	CMT027821806	CMT037821806	0,29	0.63
					85,04 (for 793L chain only)	3.348		1 3/16	CMT027821807	CMT037821807	0,28	0.62
								1 1/4	CMT027821808	CMT037821808	0,28	0.62
								1 3/8	CMT027821811	CMT037821811	0,28	0.61
								1 7/16	CMT027821809	CMT037821809	0,27	0.60
								1 1/2	CMT027821810	CMT037821810	0,27	0.60
19	154,32	6.076	156,30	6.154	80,46	3.168	25		**CMT027821901**	**CMT037821901**	0,32	0.71
							30		**CMT027821902**	**CMT037821902**	0,31	0.69
							35		**CMT027821903**	**CMT037821903**	0,31	0.68
							40		**CMT027821904**	**CMT037821904**	0,30	0.66
							45		**CMT027821905**	**CMT037821905**	0,29	0.65
							50		**CMT027821913**	**CMT037821913**	0,28	0.63
								1	CMT027821906	CMT037821906	0,32	0.70
					89,06 (for 793L chain only)	3.506		1 3/16	CMT027821907	CMT037821907	0,31	0.69
								1 1/4	CMT027821908	CMT037821908	0,31	0.69
								1 3/8	CMT027821911	CMT037821911	0,31	0.68
								1 7/16	CMT027821909	CMT037821909	0,31	0.68
								1 1/2	CMT027821910	CMT037821910	0,30	0.67

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

1¼" Pitch Heavy Duty Sideflexing Belts



INDUSTRIES AND APPLICATIONS

REGINA Sideflexing belts are suitable for packaging applications requiring speed and heavy packs carriage around curves, in particular: multi packs of plastic bottles, cartons, shrink wrapped cans.

INDUSTRIES

Bottling & canning

Food filling

Pharmaceutical

Paper / Cardboard


Consumer goods





BELT CONVEYING CAPABILITY


L-PATH



APPLICATION EXAMPLE 1

- Belt width W: 850 mm
- Straight section L: 1200 mm
- Curve radius: 1600 mm
- Speed: 30 m/min
- Load: N°32 shrink packs 3x2 1.SL PET in double track
- Total weight on the conveyor: 290 kg


U-PATH



APPLICATION EXAMPLE 2

- Belt width W: 850 mm
- Straight section L: 1200 mm
- Curve radius: 1600 mm
- Speed: 30 m/min
- Load: N°45 shrink packs 3x2 1.SL PET in double track
- Total weight on the conveyor: 400 kg

C-PATH

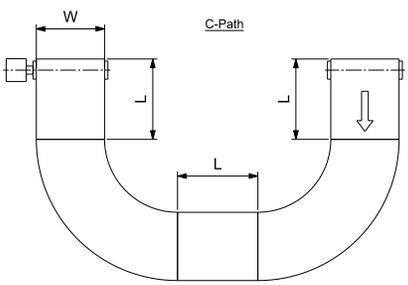

APPLICATION EXAMPLE 3

- Belt width W: 850 mm
- Straight section L: 1200 mm
- Curve radius: 1600 mm
- Speed: 30 m/min
- Load: N°55 shrink packs 3x2 1L PET in double track
- Total weight on the conveyor: 330 kg
- N° 1 drive only to link two curves

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

1 1/4" PITCH HEAVY DUTY SIDEFLEXING BELTS - **2556 SERIES**

FEATURES


BENEFITS

- Belt equipped with radial bearing.
- Split guide system to prevent overturning and provide radial force resistance in sideflexing section.




- Drastic friction reduction in curve sections.
- No curve overheating
  -Drastic wear and noise reduction
  -Smooth belt running
- No special materiai requirement for curve profile (UHMWPE standard)
  -Cost saving

- Outer modules with reinforced hinges and larger cross-section.

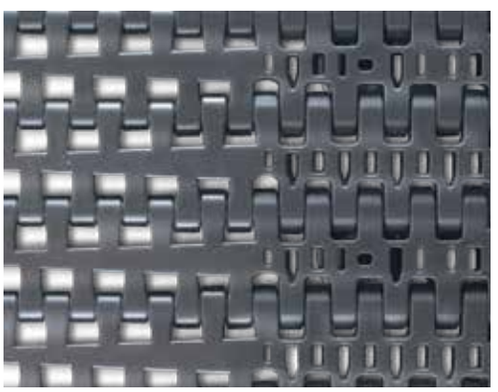

- High conveying capability for the most demanding layouts:
  -180° single curve
  -2x90° curves

- Available in tight radius version (SR):
  -Reinforced design of the inner modules
  -Minimum ratio (1.2) between inner radius of the curve and belt width.

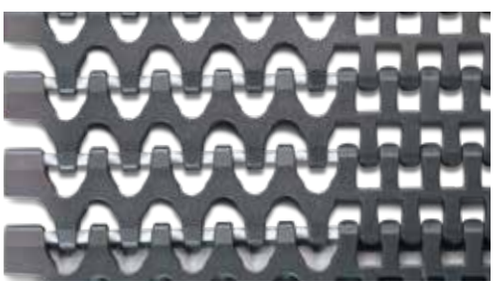


- Higher transversal and longitudinal stiffness.
- More compact curves for reduced footprint layout.

- "Poka yoke" design of the outer hinges.




- Prevention of any assembling mistakes.

- Guide system suitable for conveyors frame with 44 mm guide clearance.

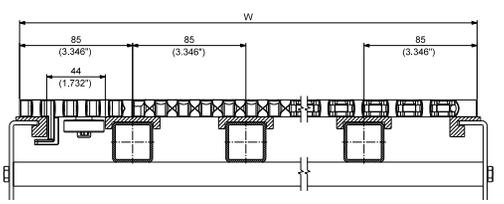

- Wear strips standardization.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

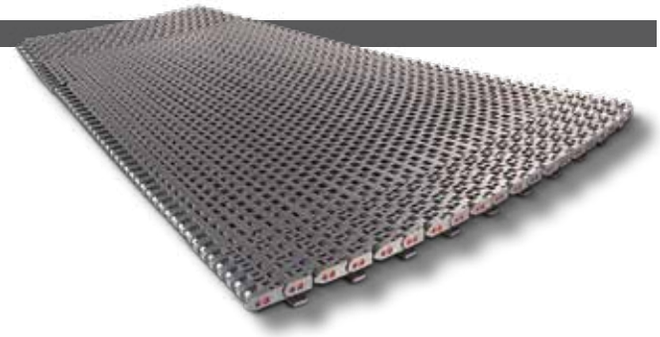

TAB+BEARING
12,7 mm (0.5") THICKNESS
REINFORCED OUTER MODULES
STANDARD SIDEFLEXING RADIUS

For traditional left, right or "**U**" turn conveying.
Average ratio between internal sideflexing radius and width = **1.8.**
Guide system with **one side TAB+ Stainless Steel Bearing (waterproof).**

- Belt widths: from 255 mm (10.04") to 850 mm (33.46") in 85 mm (3.35") increments

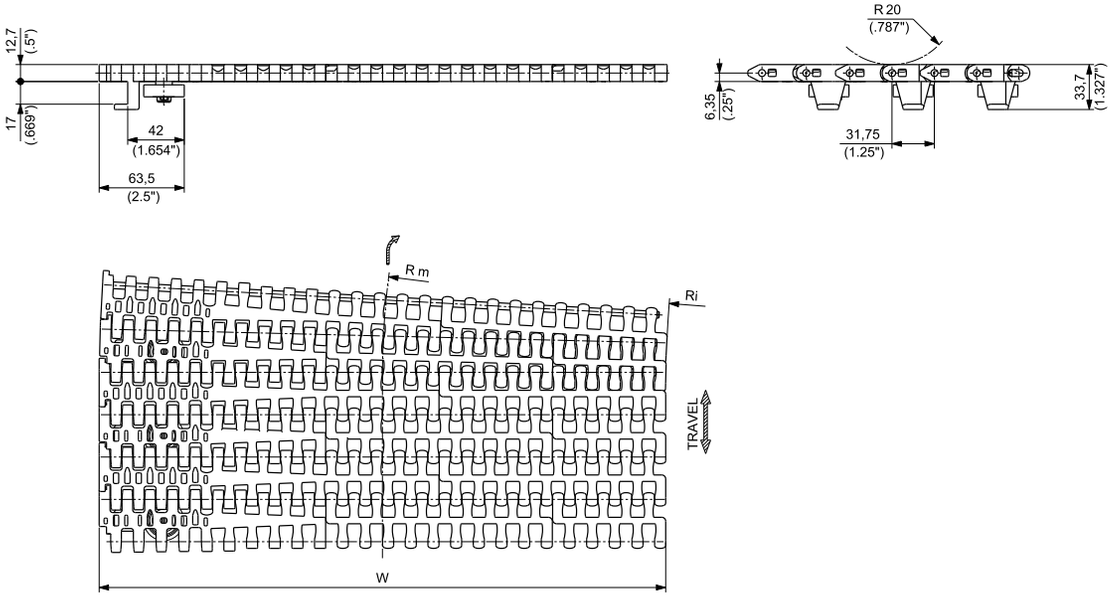


Materials see page 14
Sprockets see pages 267÷268
Corner tracks see page 346
Applications see page 24

MATERIALS		PART NUMBER	WIDTH W		SIDEFLEXING RADIUS				WEIGHT	
					INNER Ri		MEDIUM Rm			
Module	Pin		mm	inch	mm	inch	mm	inch	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® **UP**	PBT	**2556HTB-UP0255**	255	10.04	472,5	18.60	600	23.62	3,24	2.18
		2556HTB-UP0340	340	13.39	630,0	24.80	800	31.50	3,97	2.67
		2556HTB-UP0425	425	16.73	787,3	31.00	1000	39.37	4,70	3.16
		2556HTB-UP0510	510	20.08	945,0	37.21	1200	47.24	5,43	3.65
		2556HTB-UP0595	595	23.43	1102,5	43.41	1400	55.12	6,16	4.14
		2556HTB-UP0680	680	26.77	1260,0	49.61	1600	62.99	6,90	4.64
		2556HTB-UP0765	765	30.12	1417,5	55.81	1800	70.87	7,63	5.13
		2556HTB-UP0850	850	33.46	1575,0	62.01	2000	78.74	8,36	5.62

Standard packaging:
Rolls of 1,524 m (5 ft)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

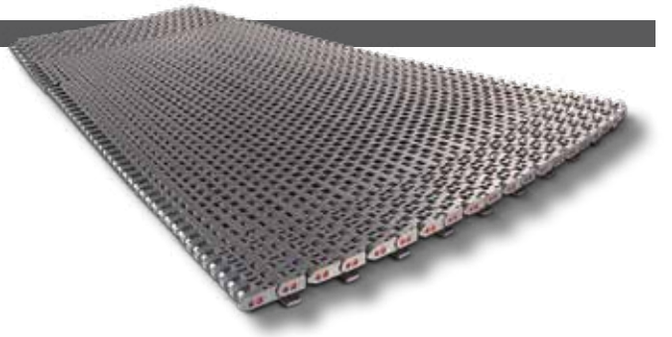



TAB+BEARING
12,7 mm (0.5") THICKNESS
REINFORCED OUTER MODULES
REDUCED SIDEFLEXING RADIUS

For traditional left, right or **"U"** turn conveying.
Average ratio between internal sideflexing radius and width= **1.2**.
Suitable to be used in more compact conveyors, saving flor space.
For **heavy duty** applications with high working load and speed.
Guide system with **one side TAB+Stainless Steel Bearing (waterproof).**

- Belt widths: from 340 mm (13.39") to 850 mm (33.46") in 85 mm (3.35") increments

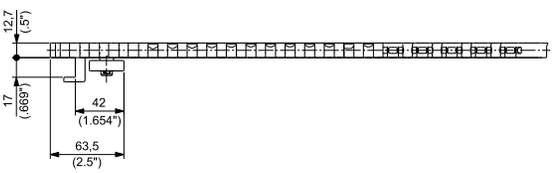



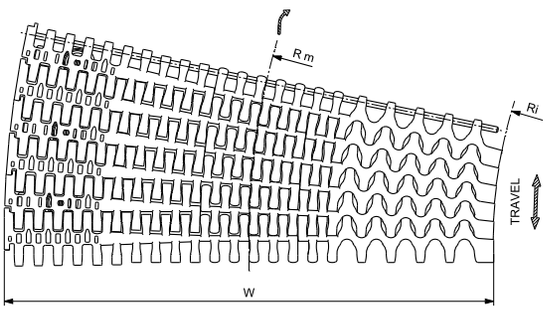

Materials see page 14
Sprockets see pages 267÷271
Corner tracks see page 346
Applications see page 24

MATERIALS		PART NUMBER	WIDTH W		SIDEFLEXING RADIUS				WEIGHT	
					INNER Ri		MEDIUM Rm			
Module	Pin		mm	inch	mm	inch	mm	inch	kg/m	lbs/ft
ULTRA PERFORMANCE HOMOPOLYMER DELRIN ® UP	PBT	**2556HTB-SRUP0340**	340	13.39	330,0	12.99	500	19.69	3,91	2.63
		2556HTB-SRUP0425	425	16.73	387,5	15.26	600	23.62	4,70	3.16
		2556HTB-SRUP0510	510	20.08	545,0	21.46	800	31.50	5,43	3.65
		2556HTB-SRUP0595	595	23.43	702,5	27.66	1000	39.37	6,17	4.15
		2556HTB-SRUP0680	680	26.77	860,0	33.86	1200	47.24	6,90	4.64
		2556HTB-SRUP0765	765	30.12	1017,5	40.06	1400	55.12	7,63	5.13
		2556HTB-SRUP0850	850	33.46	1175,5	46.26	1600	62.99	8,36	5.62

Standard packaging: Rolls of 1,524 m (5 ft)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **2556HTB**
- **2556HTB-SR**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE




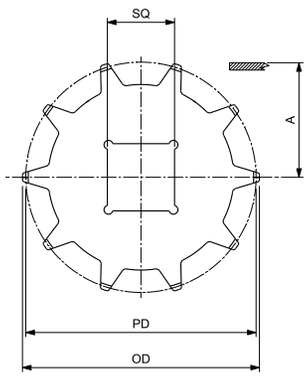


SQUARE BORE - DRIVE/IDLER

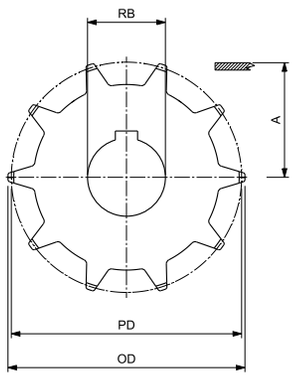

ROUND BORE - DRIVE

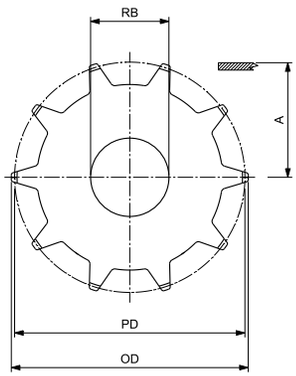

ROUND BORE - IDLER



MACHINED DOUBLE ROW SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE**		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch***	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
8*	82,97	3.267	86,50	3.406	35,14	1.383	30			**MPBAT255508D30**	**MPBAF255508D30**	0,08	0.17
							35			**MPBAT255508D35**	**MPBAF255508D35**	0,07	0.16
								1		MPBAT255508D254	MPBAF255508D254	0,08	0.19
								1¼		MPBAT255508D317	MPBAF255508D317	0,08	0.17
10	102,75	4.045	106,50	4.193	45,03	1.773	30			**MPBAT255510D30**	**MPBAF255510D30**	0,15	0.32
							35			**MPBAT255510D35**	**MPBAF255510D35**	0,14	0.31
							40		**MPBAQ255510D40**	**MPBAT255510D40**	**MPBAF255510D40**	0,13	0.29
								1		MPBAT255510D254	MPBAF255510D254	0,16	0.34
								1¼		MPBAT255510D317	MPBAF255510D317	0,15	0.32
								1½	MPBAQ255510D381	MPBAT255510D381	MPBAF255510D381	0,14	0.30

*For some shaft dimensions, shaft needs to be properly machined down to avoid interference with the belt tabs. Please contact REGINA Application Engineering for more details.
**In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
*** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:


- **2556HTB**
- **2556HTB-SR**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS




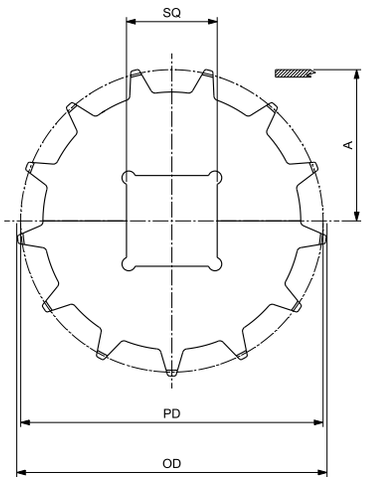


SQUARE BORE - DRIVE/IDLER

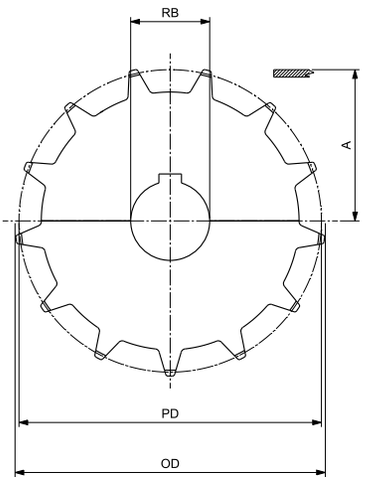

ROUND BORE - DRIVE

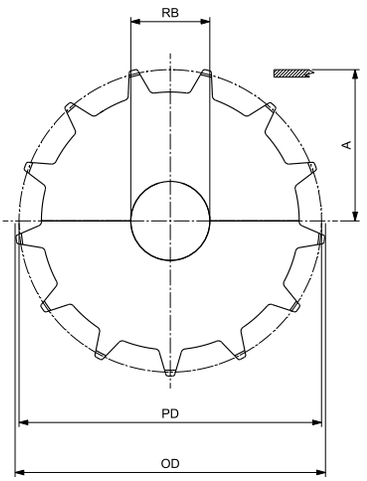

ROUND BORE - IDLER



MACHINED DOUBLE ROW SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
10	102,75	4.045	106,50	4.193	45,03	1.773	30			**MPBAST255510D30**	**MPBASF255510D30**	0,18	0.40
							35			**MPBAST255510D35**	**MPBASF255510D35**	0,17	0.37
							40		**MPBASQ255510D40**	**MPBAST255510D40**	**MPBASF255510D40**	0,16	0.35
								1		MPBAST255510D254	MPBASF255510D254	0,19	0.42
								1¼		MPBAST255510D317	MPBASF255510D317	0,18	0.40
								1½	MPBASQ255510D381	MPBAST255510D381	MPBASF255510D381	0,17	0.37
13	132,67	5.223	137,50	5.413	59,99	2.362	30			**MPBAST255513D30**	**MPBASF255513D30**	0,30	0.66
							35			**MPBAST255513D35**	**MPBASF255513D35**	0,29	0.64
							40		**MPBASQ255513D40**	**MPBAST255513D40**	**MPBASF255513D40**	0,28	0.62
								1		MPBAST255513D254	MPBASF255513D254	0,30	0.67
								1¼		MPBAST255513D317	MPBASF255513D317	0,30	0.65
								1½	MPBASQ255513D381	MPBAST255513D381	MPBASF255513D381	0,29	0.63
15	152,71	6.012	158,00	6.220	70,01	2.756	30			**MPBAST255515D30**	**MPBASF255515D30**	0,41	0.91
							35			**MPBAST255515D35**	**MPBASF255515D35**	0,41	0.89
							40		**MPBASQ255515D40**	**MPBAST255515D40**	**MPBASF255515D40**	0,40	0.88
								1		MPBAST255515D254	MPBASF255515D254	0,42	0.92
								1¼		MPBAST255515D317	MPBASF255515D317	0,41	0.91
								1½	MPBASQ255515D381	MPBAST255515D381	MPBASF255515D381	0,40	0.88
16	162,75	6.407	168,00	6.614	75,03	2.954	30			**MPBAST255516D30**	**MPBASF255516D30**	0,48	1.05
							35			**MPBAST255516D35**	**MPBASF255516D35**	0,47	1.04
							40		**MPBASQ255516D40**	**MPBAST255516D40**	**MPBASF255516D40**	0,46	1.02
								1		MPBAST255516D254	MPBASF255516D254	0,48	1.07
								1¼		MPBAST255516D317	MPBASF255516D317	0,48	1.05
								1½	MPBASQ255516D381	MPBAST255516D381	MPBASF255516D381	0,47	1.03

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




SUITABLE FOR CHAINS:

- **2556HTB-SR**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE

These sprockets are used for 2556HTB-SR belts only.
One drive and one idler sprocket are needed for each belt regardless of its width.
For more information on the correct position of these sprockets please contact REGINA Application Engineers.

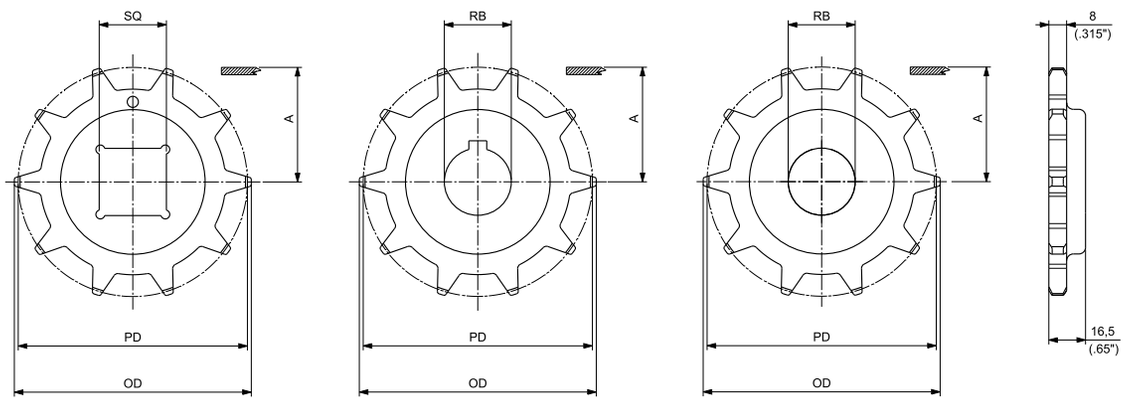

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE**		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch***	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
8*	82,97	3.267	86,50	3.406	35,14	1.383	35			**MPBAT25550830**	**MPBAF25550830**	0,04	0.09
							40			**MPBAT25550835**	**MPBAF25550835**	0,03	0.08
								1		MPBAT255508254	MPBAF255508254	0,04	0.10
								1¼		MPBAT255508317	MPBAF255508317	0,04	0.08
10	102,75	4.045	106,50	4.193	45,03	1.773	30			**MPBAT25551030**	**MPBAF25551030**	0,08	0.17
							35			**MPBAT25551035**	**MPBAF25551035**	0,07	0.16
							40		**MPBAQ25551040**	**MPBAT25551040**	**MPBAF25551040**	0,06	0.14
								1		MPBAT255510254	MPBAF255510254	0,08	0.18
								1¼		MPBAT255510317	MPBAF255510317	0,07	0.16
								1½	MPBAQ255510381	MPBAT255510381	MPBAF255510381	0,07	0.15

*For some shaft dimensions, shaft needs to be properly machined down to avoid interference with the belt tabs. Please contact REGINA Application Engineering for more details.
**In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
*** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:
- **2556HTB-SR**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
NUTS:	B	BRASS



These sprockets are used for 2556HTB-SR belts only.
One drive and one idler sprocket are needed for each belt regardless of its width.
For more information on the correct position of these sprockets please contact REGINA Application Engineers.

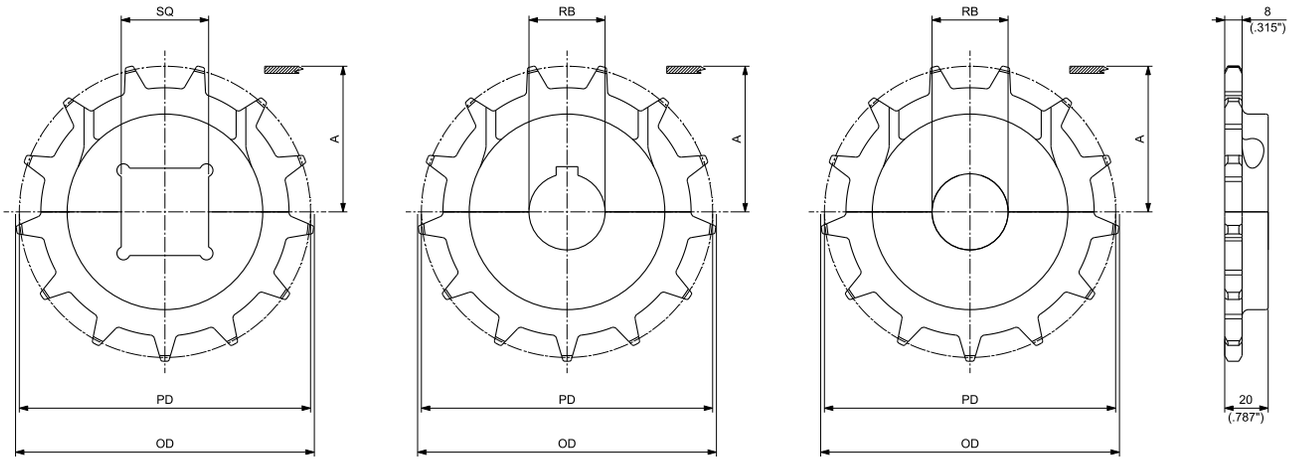

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SPLIT DRIVE AND IDLER SPROCKETS


N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
10	102,75	4.045	106,50	4.193	45,03	1.773	30			**MPBAST25551030**	**MPBASF25551030**	0,11	0.24
							35			**MPBAST25551035**	**MPBASF25551035**	0,10	0.22
								1		MPBAST255510254	MPBASF255510254	0,12	0.26
								1¼		MPBAST255510317	MPBASF255510317	0,11	0.24
13	132,67	5.223	137,50	5.413	59,99	2.362	30			**MPBAST25551330**	**MPBASF25551330**	0,20	0.43
							35			**MPBAST25551335**	**MPBASF25551335**	0,19	0.42
							40		**MPBASQ25551340**	**MPBAST25551340**	**MPBASF25551340**	0,18	0.40
								1		MPBAST255513254	MPBASF255513254	0,20	0.44
								1¼		MPBAST255513317	MPBASF255513317	0,19	0.43
								1½	MPBASQ255513381	MPBAST255513381	MPBASF255513381	0,19	0.41
15	152,71	6.012	158,00	6.220	70,01	2.756	30			**MPBAST25551530**	**MPBASF25551530**	0,26	0.58
							35			**MPBAST25551535**	**MPBASF25551535**	0,26	0.57
							40		**MPBASQ25551540**	**MPBAST25551540**	**MPBASF25551540**	0,25	0.56
								1		MPBAST255515254	MPBASF255515254	0,27	0.59
								1¼		MPBAST255515317	MPBASF255515317	0,26	0.58
								1½	MPBASQ255515381	MPBAST255515381	MPBASF255515381	0,25	0.56
16	162,75	6.407	168,00	6.614	75,03	2.954	30			**MPBAST25551630**	**MPBASF25551630**	0,29	0.63
							35			**MPBAST25551635**	**MPBASF25551635**	0,28	0.62
							40		**MPBASQ25551640**	**MPBAST25551640**	**MPBASF25551640**	0,27	0.60
								1		MPBAST255516254	MPBASF255516254	0,29	0.64
								1¼		MPBAST255516317	MPBASF255516317	0,28	0.63
								1½	MPBASQ255516381	MPBAST255516381	MPBASF255516381	0,28	0.61

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:
- **2556HTB-SR**

MATERIALS		
SPROCKETS:	PA	POLYAMIDE
SCREWS:	SS	STAINLESS STEEL
INSERTS:	B	BRASS

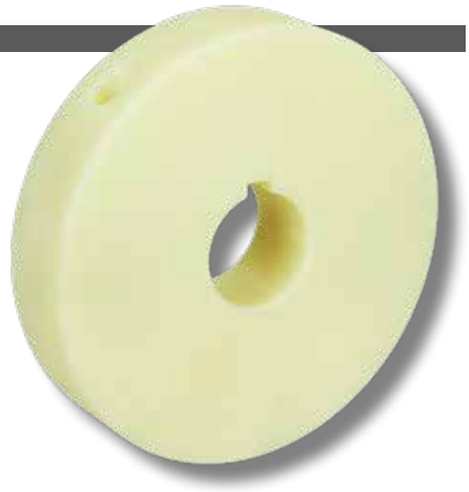

These supporting wheels are used for 2556HTB-SR belts only in order to support the inner module.
Two supporting wheels are needed (for drive and idler shaft) for each belt regardless of its width.
For more information on the correct position of these sprockets please contact REGINA Application Engineers.

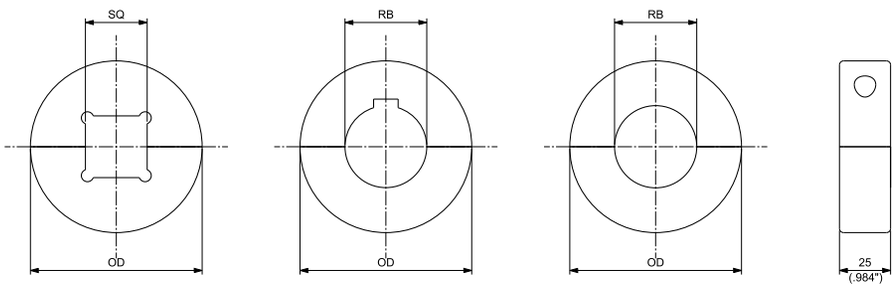

SQUARE BORE - DRIVE/IDLER | ROUND BORE - DRIVE | ROUND BORE - IDLER

MACHINED SPLIT SUPPORTING WHEELS

N. TEETH	OUTSIDE DIAMETER OD		BORE SIZE*		PART NUMBER SQUARE BORE SQ	ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	DRIVE/IDLER	DRIVE	IDLER	Kg	lbs
8	63	2.480	30			**CC255001**	**CC255029**	0,08	0.18
			35			**CC255002**	**CC255030**	0,07	0.16
				1		CC255003	CC255031	0,09	0.19
				1¼		CC255004	CC255032	0,08	0.17
10	84	3.307	30			**CC255005**	**CC255033**	0,16	0.35
			35			**CC255006**	**CC255034**	0,15	0.34
			40		**CC255057**	**CC255007**	**CC255035**	0,14	0.32
				1		CC255008	CC255036	0,17	0.37
				1¼		CC255009	CC255037	0,16	0.35
				1½	CC255058	CC255010	CC255038	0,15	0.33
13	115	4.528	30			**CC255011**	**CC255039**	0,30	0.66
			35			**CC255012**	**CC255040**	0,29	0.64
			40		**CC255059**	**CC255013**	**CC255041**	0,28	0.62
				1		CC255014	CC255042	0,30	0.67
				1¼		CC255015	CC255043	0,30	0.65
				1½	CC255060	CC255016	CC255044	0,29	0.63
15	135	5.315	30			**CC255017**	**CC255045**	0,41	0.91
			35			**CC255018**	**CC255046**	0,41	0.89
			40		**CC255061**	**CC255019**	**CC255047**	0,40	0.88
				1		CC255020	CC255048	0,42	0.92
				1¼		CC255021	CC255049	0,41	0.91
				1½	CC255062	CC255022	CC255050	0,40	0.88
16	145	5.709	30			**CC255023**	**CC255051**	0,48	1.05
			35			**CC255024**	**CC255052**	0,47	1.03
			40		**CC255063**	**CC255025**	**CC255053**	0,46	1.01
				1		CC255026	CC255054	0,48	1.06
				1¼		CC255027	CC255055	0,47	1.04
				1½	CC255064	CC255028	CC255056	0,46	1.02

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

Heavy Duty Fixed Radius Belts

NEW



INDUSTRIES AND APPLICATIONS

REGINA Fixed Radius Belts are suitable for applications requiring heavy load and high speed around curves.

INDUSTRIES

Bottling and canning

Container manufacturing (in particular glass bottles)

Paper/cardboard

APPLICATIONS

Multi packs of plastic bottles

Cartons

Shrink wrapped cans

General product handling in sideflexing conveyors


NEW

KEY FEATURES & BENEFITS

• COMPACT CONVEYOR STRUCTURE

Regina Matveyor® 4650 Series belt features specially designed conical modules with short fixed radius and reduced pitch, allowing for the elimination of straight sections at the infeed and discharge of the conveyor, as would normally be requested by the traditional variable radius belts.
The above features provide the following advantages:

- More compact corners for reduced footprint layout
- Higher flexibility in the layout design
- Easier conveyor installation

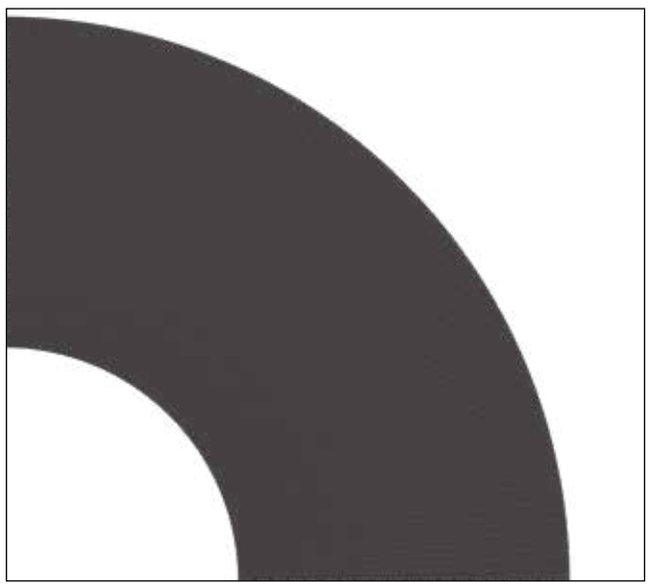


• SAFE DESIGN

The completely closed top surface of Regina Matveyor® 4650 Series belt guarantees maximum safety for line operators, with no risk of finger pinching, otherwise possible with traditional sideflexing belts, due to presence of gaps between belt pitches.

• CONSISTENT PRODUCT ORIENTATION/SPACING

The closed top surface of Regina Matveyor® 4650 Series belt, with no possibility of relative displacement between pitches while running, guarantees the perfect alignment and orientation of the conveyed product with the direction of travel of the belt.

For high-speed applications conveying light or smooth products with low coefficient of friction Regina offers a **special rubberized belt version, HF 4650 Series**, to provide the maximum grip with the conveyed products.

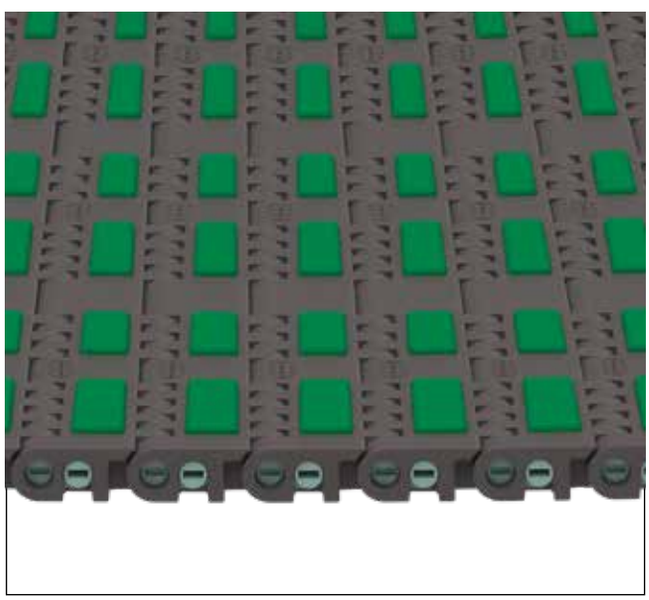


• CONVEYOR STANDARDIZATION

Regina Matveyor® 4650 Series belt is available in widths multiple of 85 mm, which perfectly fits metric standard conveyors.
This minimizes the need for custom adjustments when connecting straight and sideflexing conveyors.

• HIGH CONVEYING CAPABILITY

The special hinge design of Regina Matveyor® 4650 Series belt allows for a working load of 25000 N/m (1,713 lbs/ft), significantly higher vs. other belts available in the market for similar applications. This results in the possibility to convey high product loads with maximum belt reliability and life.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

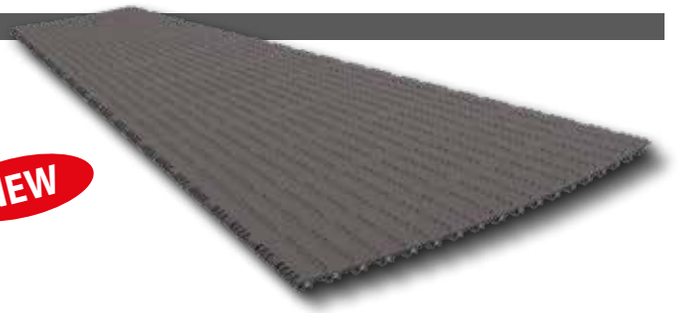



8,7 mm (0.343") THICKNESS
SOLID TOP

NEW

For traditional left, right or "**U**" turn conveying.

- **Belt widths:** from 340 mm (13.39") to 1020 mm (40.16") in 85 mm (3.35") increments
- **Belt inner radius:** from 600 mm (23.62") to 1450 mm (57.09")
- **Belt weight:** 7,79 kg/m² (1.60lbs/ft²)
- **Working Load (at 25°C/77°F):** 25000 N/m (1,713 lbs/ft)
- **Materials:** UP Ultra Perfomance Homopolymer Delrin® for module
  PBT for pin

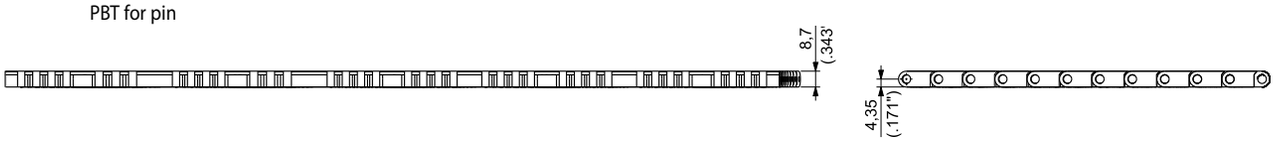

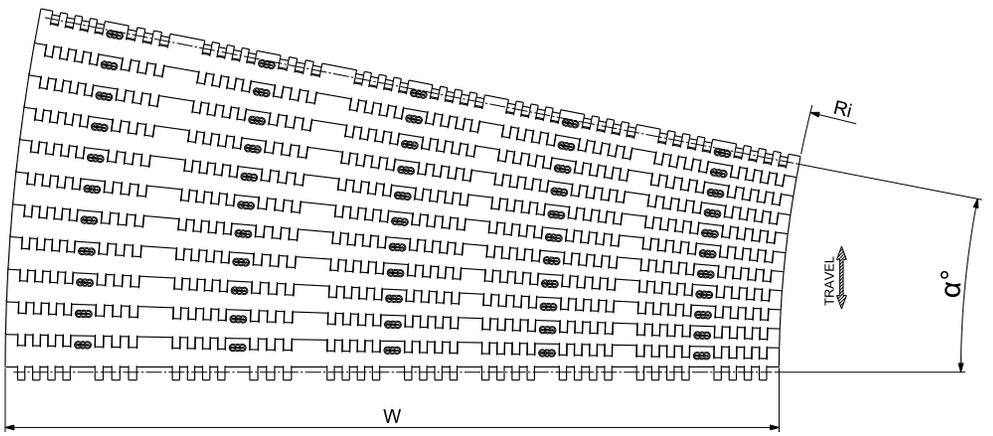

Materials see page 14
Sprockets see pages 280
Modular transfer plates see pages 353÷354
Applications see page 24

INNER SIDEFLEXING RADIUS Ri = 600 mm (23.62")


WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**4650UP0340E01**	**4650UP0340C01**	**4650UP0340B01**	**4650UP0340D01**	**4650UP0340A01**	**4650UP0340G01**
425	16.73	**4650UP0425E01**	**4650UP0425C01**	**4650UP0425B01**	**4650UP0425D01**	**4650UP0425A01**	**4650UP0425G01**
510	20.08	**4650UP0510E01**	**4650UP0510C01**	**4650UP0510B01**	**4650UP0510D01**	**4650UP0510A01**	**4650UP0510G01**
595	23.43	**4650UP0595E01**	**4650UP0595C01**	**4650UP0595B01**	**4650UP0595D01**	**4650UP0595A01**	**4650UP0595G01**
680	26.77	**4650UP0680E01**	**4650UP0680C01**	**4650UP0680B01**	**4650UP0680D01**	**4650UP0680A01**	**4650UP0680G01**
765	30.12	**4650UP0765E01**	**4650UP0765C01**	**4650UP0765B01**	**4650UP0765D01**	**4650UP0765A01**	**4650UP0765G01**
850	33.46	**4650UP0850E01**	**4650UP0850C01**	**4650UP0850B01**	**4650UP0850D01**	**4650UP0850A01**	**4650UP0850G01**
935	36.81	**4650UP0935E01**	**4650UP0935C01**	**4650UP0935B01**	**4650UP0935D01**	**4650UP0935A01**	**4650UP0935G01**
1020	40.16	**4650UP1020E01**	**4650UP1020C01**	**4650UP1020B01**	**4650UP1020D01**	**4650UP1020A01**	**4650UP1020G01**

INNER SIDEFLEXING RADIUS Ri = 770 mm (30.31")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**4650UP0340E03**	**4650UP0340C03**	**4650UP0340B03**	**4650UP0340D03**	**4650UP0340A03**	**4650UP0340G03**
425	16.73	**4650UP0425E03**	**4650UP0425C03**	**4650UP0425B03**	**4650UP0425D03**	**4650UP0425A03**	**4650UP0425G03**
510	20.08	**4650UP0510E03**	**4650UP0510C03**	**4650UP0510B03**	**4650UP0510D03**	**4650UP0510A03**	**4650UP0510G03**
595	23.43	**4650UP0595E03**	**4650UP0595C03**	**4650UP0595B03**	**4650UP0595D03**	**4650UP0595A03**	**4650UP0595G03**
680	26.77	**4650UP0680E03**	**4650UP0680C03**	**4650UP0680B03**	**4650UP0680D03**	**4650UP0680A03**	**4650UP0680G03**
765	30.12	**4650UP0765E03**	**4650UP0765C03**	**4650UP0765B03**	**4650UP0765D03**	**4650UP0765A03**	**4650UP0765G03**
850	33.46	**4650UP0850E03**	**4650UP0850C03**	**4650UP0850B03**	**4650UP0850D03**	**4650UP0850A03**	**4650UP0850G03**
935	36.81	**4650UP0935E03**	**4650UP0935C03**	**4650UP0935B03**	**4650UP0935D03**	**4650UP0935A03**	**4650UP0935G03**
1020	40.16	**4650UP1020E03**	**4650UP1020C03**	**4650UP1020B03**	**4650UP1020D03**	**4650UP1020A03**	**4650UP1020G03**

For other inner sideflexing radius see next page

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

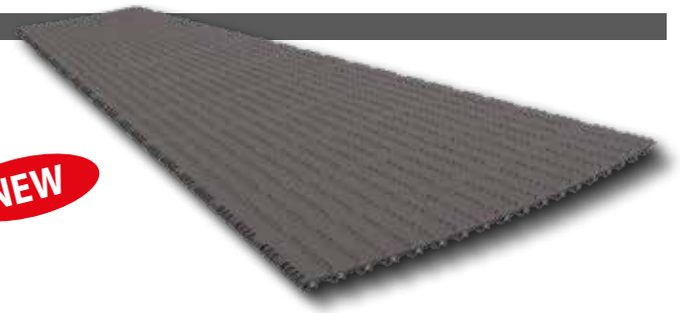


8,7 mm (0.343") THICKNESS
SOLID TOP

NEW

For traditional left, right or "**U**" turn conveying.

- **Belt widths:** from 340 mm (13.39") to 1020 mm (40.16") in 85 mm (3.35") increments
- **Belt inner radius:** from 600 mm (23.62") to 1450 mm (57.09")
- **Belt weight:** 7,79 kg/m^2 (1.60lbs/ft^2)
- **Working Load (at 25°C/77°F):** 25000 N/m (1,713 lbs/ft)
- **Materials:** UP Ultra Perfomance Homopolymer Delrin® for module
  PBT for pin



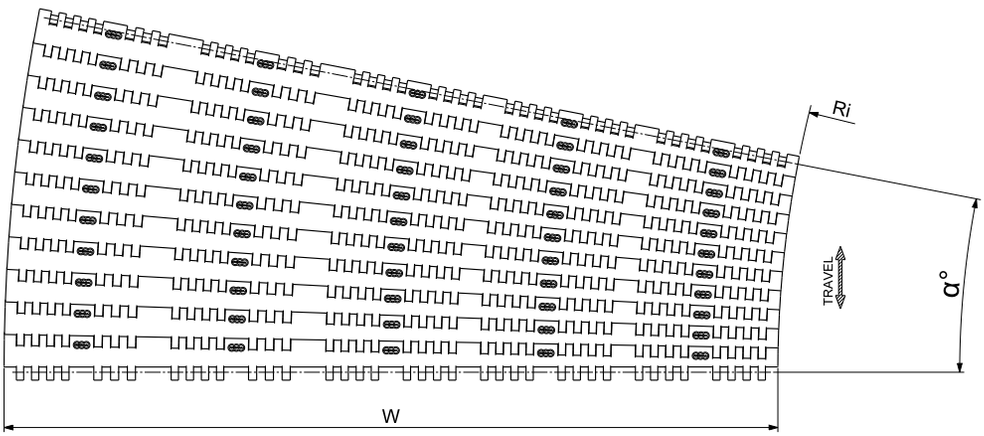

Materials see page 14
Sprockets see pages 280
Modular transfer plates see pages 353÷354
Applications see page 24

INNER SIDEFLEXING RADIUS Ri = 1025 mm (40.35")


WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**4650UP0340E06**	**4650UP0340C06**	**4650UP0340B06**	**4650UP0340D06**	**4650UP0340A06**	**4650UP0340G06**
425	16.73	**4650UP0425E06**	**4650UP0425C06**	**4650UP0425B06**	**4650UP0425D06**	**4650UP0425A06**	**4650UP0425G06**
510	20.08	**4650UP0510E06**	**4650UP0510C06**	**4650UP0510B06**	**4650UP0510D06**	**4650UP0510A06**	**4650UP0510G06**
595	23.43	**4650UP0595E06**	**4650UP0595C06**	**4650UP0595B06**	**4650UP0595D06**	**4650UP0595A06**	**4650UP0595G06**
680	26.77	**4650UP0680E06**	**4650UP0680C06**	**4650UP0680B06**	**4650UP0680D06**	**4650UP0680A06**	**4650UP0680G06**
765	30.12	**4650UP0765E06**	**4650UP0765C06**	**4650UP0765B06**	**4650UP0765D06**	**4650UP0765A06**	**4650UP0765G06**
850	33.46	**4650UP0850E06**	**4650UP0850C06**	**4650UP0850B06**	**4650UP0850D06**	**4650UP0850A06**	**4650UP0850G06**
935	36.81	**4650UP0935E06**	**4650UP0935C06**	**4650UP0935B06**	**4650UP0935D06**	**4650UP0935A06**	**4650UP0935G06**
1020	40.16	**4650UP1020E06**	**4650UP1020C06**	**4650UP1020B06**	**4650UP1020D06**	**4650UP1020A06**	**4650UP1020G06**

INNER SIDEFLEXING RADIUS Ri = 1280 mm (50.39")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**4650UP0340E09**	**4650UP0340C09**	**4650UP0340B09**	**4650UP0340D09**	**4650UP0340A09**	**4650UP0340G09**
425	16.73	**4650UP0425E09**	**4650UP0425C09**	**4650UP0425B09**	**4650UP0425D09**	**4650UP0425A09**	**4650UP0425G09**
510	20.08	**4650UP0510E09**	**4650UP0510C09**	**4650UP0510B09**	**4650UP0510D09**	**4650UP0510A09**	**4650UP0510G09**
595	23.43	**4650UP0595E09**	**4650UP0595C09**	**4650UP0595B09**	**4650UP0595D09**	**4650UP0595A09**	**4650UP0595G09**
680	26.77	**4650UP0680E09**	**4650UP0680C09**	**4650UP0680B09**	**4650UP0680D09**	**4650UP0680A09**	**4650UP0680G09**
765	30.12	**4650UP0765E09**	**4650UP0765C09**	**4650UP0765B09**	**4650UP0765D09**	**4650UP0765A09**	**4650UP0765G09**
850	33.46	**4650UP0850E09**	**4650UP0850C09**	**4650UP0850B09**	**4650UP0850D09**	**4650UP0850A09**	**4650UP0850G09**

For other inner sideflexing radius see previous and next page

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

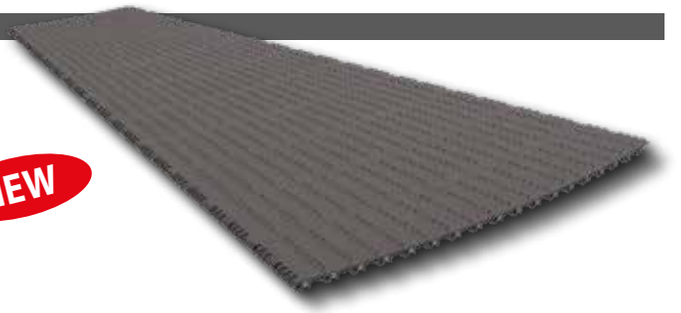


8,7 mm (0.343") THICKNESS
SOLID TOP

NEW

For traditional left, right or "**U**" turn conveying.

- **Belt widths:** from 340 mm (13.39") to 1020 mm (40.16") in 85 mm (3.35") increments
- **Belt inner radius:** from 600 mm (23.62") to 1450 mm (57.09")
- **Belt weight:** 7,79 kg/m² (1.60lbs/ft²)
- **Working Load (at 25°C/77°F):** 25000 N/m (1,713 lbs/ft)
- **Materials:** UP Ultra Perfomance Homopolymer Delrin® for module
  PBT for pin



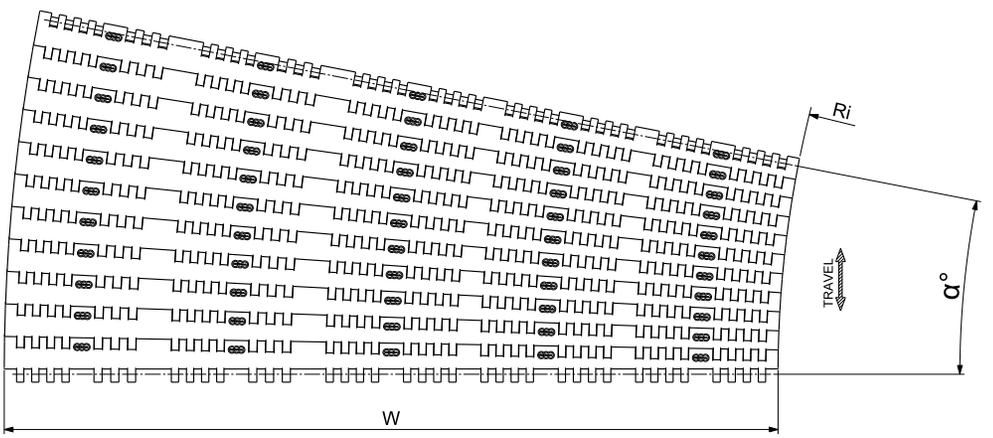

Materials see page 14
Sprockets see pages 280
Modular transfer plates see pages 353÷354
Applications see page 24

INNER SIDEFLEXING RADIUS Ri = 1365 mm (53.74")


WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**4650UP0340E10**	**4650UP0340C10**	**4650UP0340B10**	**4650UP0340D10**	**4650UP0340A10**	**4650UP0340G10**
425	16.73	**4650UP0425E10**	**4650UP0425C10**	**4650UP0425B10**	**4650UP0425D10**	**4650UP0425A10**	**4650UP0425G10**
510	20.08	**4650UP0510E10**	**4650UP0510C10**	**4650UP0510B10**	**4650UP0510D10**	**4650UP0510A10**	**4650UP0510G10**
595	23.43	**4650UP0595E10**	**4650UP0595C10**	**4650UP0595B10**	**4650UP0595D10**	**4650UP0595A10**	**4650UP0595G10**
680	26.77	**4650UP0680E10**	**4650UP0680C10**	**4650UP0680B10**	**4650UP0680D10**	**4650UP0680A10**	**4650UP0680G10**
765	30.12	**4650UP0765E10**	**4650UP0765C10**	**4650UP0765B10**	**4650UP0765D10**	**4650UP0765A10**	**4650UP0765G10**

INNER SIDEFLEXING RADIUS Ri = 1450 mm (57.09")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**4650UP0340E11**	**4650UP0340C11**	**4650UP0340B11**	**4650UP0340D11**	**4650UP0340A11**	**4650UP0340G11**
425	16.73	**4650UP0425E11**	**4650UP0425C11**	**4650UP0425B11**	**4650UP0425D11**	**4650UP0425A11**	**4650UP0425G11**
510	20.08	**4650UP0510E11**	**4650UP0510C11**	**4650UP0510B11**	**4650UP0510D11**	**4650UP0510A11**	**4650UP0510G11**
595	23.43	**4650UP0595E11**	**4650UP0595C11**	**4650UP0595B11**	**4650UP0595D11**	**4650UP0595A11**	**4650UP0595G11**
680	26.77	**4650UP0680E11**	**4650UP0680C11**	**4650UP0680B11**	**4650UP0680D11**	**4650UP0680A11**	**4650UP0680G11**

For other inner sideflexing radius see previous page

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

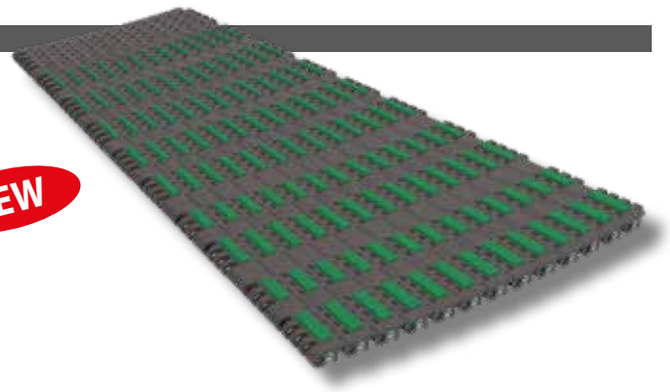



8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE

NEW

For traditional left, right or "**U**" turn conveying.

- **Belt widths:** from 340 mm (13.39") to 1020 mm (40.16') in 85 mm (3.35") increments
- **Belt inner radius:** from 600 mm (23.62") to 1450 mm (57.09")
- **Belt weight:** 8,20 kg/m^2 (1.68lbs/ft^2)
- **Working Load (at 25°C/77°F):** 25000 N/m (1,713 lbs/ft)
- **Materials:** **UP** Ultra Perfomance Homopolymer Delrin® for module
  PBT for pin
  Thermoplastic **TPE** (70 ShA hardness) for rubber

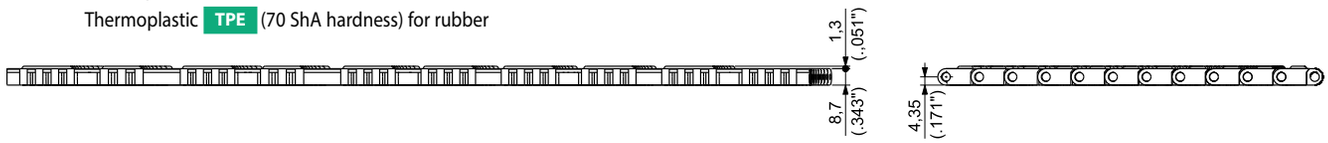

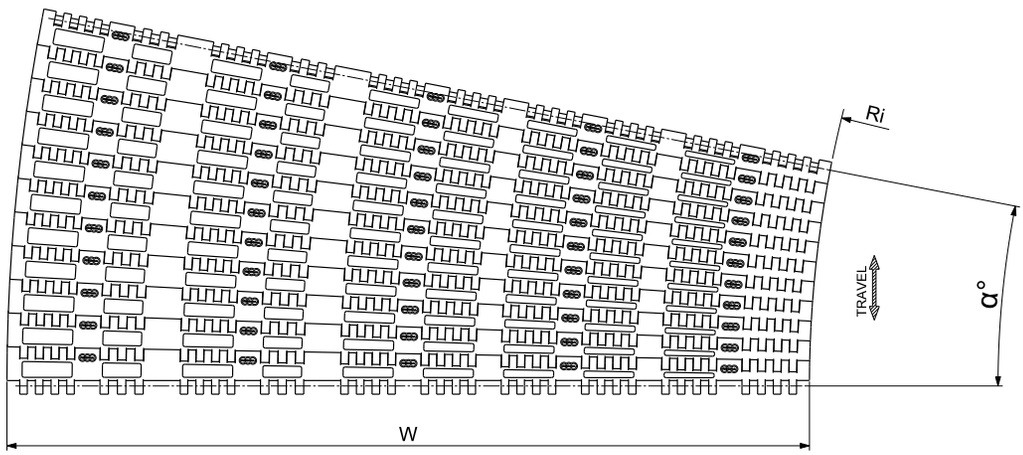

Materials see page 14
Sprockets see pages 280
Modular transfer plates see pages 353÷354
Applications see page 24

INNER SIDEFLEXING RADIUS Ri = 600 mm (23.62")


WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**HF4650UP0340E01**	**HF4650UP0340C01**	**HF4650UP0340B01**	**HF4650UP0340D01**	**HF4650UP0340A01**	**HF4650UP0340G01**
425	16.73	**HF4650UP0425E01**	**HF4650UP0425C01**	**HF4650UP0425B01**	**HF4650UP0425D01**	**HF4650UP0425A01**	**HF4650UP0425G01**
510	20.08	**HF4650UP0510E01**	**HF4650UP0510C01**	**HF4650UP0510B01**	**HF4650UP0510D01**	**HF4650UP0510A01**	**HF4650UP0510G01**
595	23.43	**HF4650UP0595E01**	**HF4650UP0595C01**	**HF4650UP0595B01**	**HF4650UP0595D01**	**HF4650UP0595A01**	**HF4650UP0595G01**
680	26.77	**HF4650UP0680E01**	**HF4650UP0680C01**	**HF4650UP0680B01**	**HF4650UP0680D01**	**HF4650UP0680A01**	**HF4650UP0680G01**
765	30.12	**HF4650UP0765E01**	**HF4650UP0765C01**	**HF4650UP0765B01**	**HF4650UP0765D01**	**HF4650UP0765A01**	**HF4650UP0765G01**
850	33.46	**HF4650UP0850E01**	**HF4650UP0850C01**	**HF4650UP0850B01**	**HF4650UP0850D01**	**HF4650UP0850A01**	**HF4650UP0850G01**
935	36.81	**HF4650UP0935E01**	**HF4650UP0935C01**	**HF4650UP0935B01**	**HF4650UP0935D01**	**HF4650UP0935A01**	**HF4650UP0935G01**
1020	40.16	**HF4650UP1020E01**	**HF4650UP1020C01**	**HF4650UP1020B01**	**HF4650UP1020D01**	**HF4650UP1020A01**	**HF4650UP1020G01**

INNER SIDEFLEXING RADIUS Ri = 770 mm (30.31")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**HF4650UP0340E03**	**HF4650UP0340C03**	**HF4650UP0340B03**	**HF4650UP0340D03**	**HF4650UP0340A03**	**HF4650UP0340G03**
425	16.73	**HF4650UP0425E03**	**HF4650UP0425C03**	**HF4650UP0425B03**	**HF4650UP0425D03**	**HF4650UP0425A03**	**HF4650UP0425G03**
510	20.08	**HF4650UP0510E03**	**HF4650UP0510C03**	**HF4650UP0510B03**	**HF4650UP0510D03**	**HF4650UP0510A03**	**HF4650UP0510G03**
595	23.43	**HF4650UP0595E03**	**HF4650UP0595C03**	**HF4650UP0595B03**	**HF4650UP0595D03**	**HF4650UP0595A03**	**HF4650UP0595G03**
680	26.77	**HF4650UP0680E03**	**HF4650UP0680C03**	**HF4650UP0680B03**	**HF4650UP0680D03**	**HF4650UP0680A03**	**HF4650UP0680G03**
765	30.12	**HF4650UP0765E03**	**HF4650UP0765C03**	**HF4650UP0765B03**	**HF4650UP0765D03**	**HF4650UP0765A03**	**HF4650UP0765G03**
850	33.46	**HF4650UP0850E03**	**HF4650UP0850C03**	**HF4650UP0850B03**	**HF4650UP0850D03**	**HF4650UP0850A03**	**HF4650UP0850G03**
935	36.81	**HF4650UP0935E03**	**HF4650UP0935C03**	**HF4650UP0935B03**	**HF4650UP0935D03**	**HF4650UP0935A03**	**HF4650UP0935G03**
1020	40.16	**HF4650UP1020E03**	**HF4650UP1020C03**	**HF4650UP1020B03**	**HF4650UP1020D03**	**HF4650UP1020A03**	**HF4650UP1020G03**

For other inner sideflexing radius see next page

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

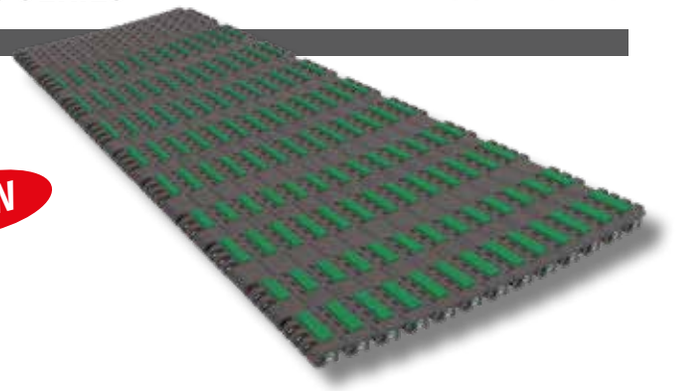



8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE

NEW

For traditional left, right or "**U**" turn conveying.

- **Belt widths:** from 340 mm (13.39") to 1020 mm (40.16') in 85 mm (3.35") increments
- **Belt inner radius:** from 600 mm (23.62") to 1450 mm (57.09")
- **Belt weight:** 8,20 kg/m^2 (1.68lbs/ft^2)
- **Working Load (at 25°C/77°F):** 25000 N/m (1,713 lbs/ft)
- **Materials:** UP Ultra Perfomance Homopolymer Delrin® for module
  PBT for pin
  Thermoplastic TPE (70 ShA hardness) for rubber

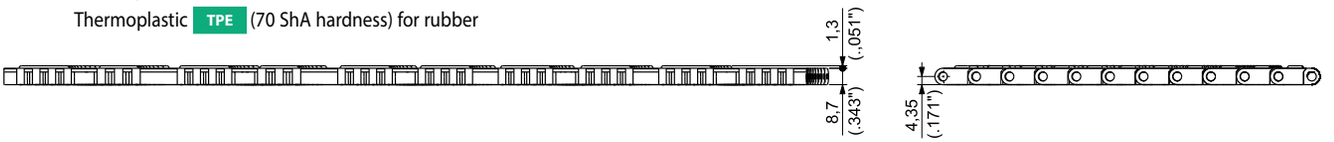

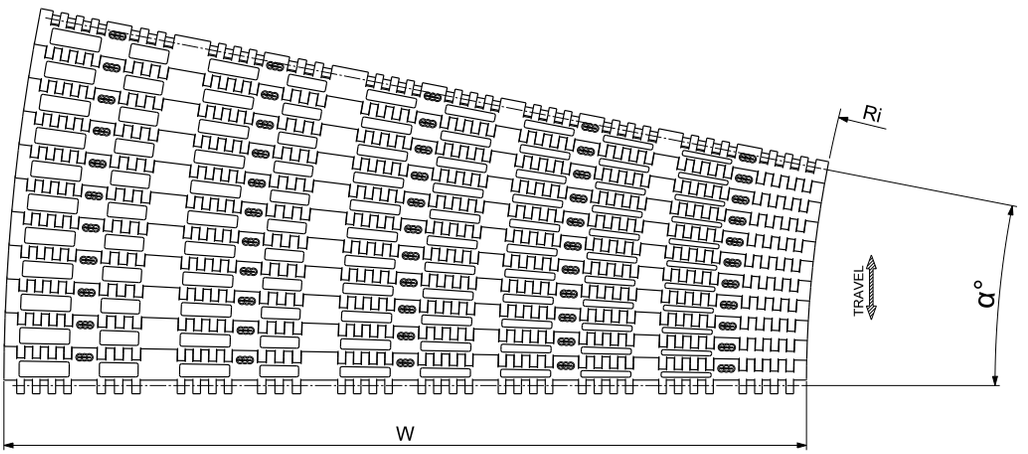

Materials see page 14
Sprockets see pages 280
Modular transfer plates see pages 353÷354
Applications see page 24

INNER SIDEFLEXING RADIUS Ri = 1025 mm (40.35")


WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**HF4650UP0340E06**	**HF4650UP0340C06**	**HF4650UP0340B06**	**HF4650UP0340D06**	**HF4650UP0340A06**	**HF4650UP0340G06**
425	16.73	**HF4650UP0425E06**	**HF4650UP0425C06**	**HF4650UP0425B06**	**HF4650UP0425D06**	**HF4650UP0425A06**	**HF4650UP0425G06**
510	20.08	**HF4650UP0510E06**	**HF4650UP0510C06**	**HF4650UP0510B06**	**HF4650UP0510D06**	**HF4650UP0510A06**	**HF4650UP0510G06**
595	23.43	**HF4650UP0595E06**	**HF4650UP0595C06**	**HF4650UP0595B06**	**HF4650UP0595D06**	**HF4650UP0595A06**	**HF4650UP0595G06**
680	26.77	**HF4650UP0680E06**	**HF4650UP0680C06**	**HF4650UP0680B06**	**HF4650UP0680D06**	**HF4650UP0680A06**	**HF4650UP0680G06**
765	30.12	**HF4650UP0765E06**	**HF4650UP0765C06**	**HF4650UP0765B06**	**HF4650UP0765D06**	**HF4650UP0765A06**	**HF4650UP0765G06**
850	33.46	**HF4650UP0850E06**	**HF4650UP0850C06**	**HF4650UP0850B06**	**HF4650UP0850D06**	**HF4650UP0850A06**	**HF4650UP0850G06**
935	36.81	**HF4650UP0935E06**	**HF4650UP0935C06**	**HF4650UP0935B06**	**HF4650UP0935D06**	**HF4650UP0935A06**	**HF4650UP0935G06**
1020	40.16	**HF4650UP1020E06**	**HF4650UP1020C06**	**HF4650UP1020B06**	**HF4650UP1020D06**	**HF4650UP1020A06**	**HF4650UP1020G06**

INNER SIDEFLEXING RADIUS Ri = 1280 mm (50.39")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**HF4650UP0340E09**	**HF4650UP0340C09**	**HF4650UP0340B09**	**HF4650UP0340D09**	**HF4650UP0340A09**	**HF4650UP0340G09**
425	16.73	**HF4650UP0425E09**	**HF4650UP0425C09**	**HF4650UP0425B09**	**HF4650UP0425D09**	**HF4650UP0425A09**	**HF4650UP0425G09**
510	20.08	**HF4650UP0510E09**	**HF4650UP0510C09**	**HF4650UP0510B09**	**HF4650UP0510D09**	**HF4650UP0510A09**	**HF4650UP0510G09**
595	23.43	**HF4650UP0595E09**	**HF4650UP0595C09**	**HF4650UP0595B09**	**HF4650UP0595D09**	**HF4650UP0595A09**	**HF4650UP0595G09**
680	26.77	**HF4650UP0680E09**	**HF4650UP0680C09**	**HF4650UP0680B09**	**HF4650UP0680D09**	**HF4650UP0680A09**	**HF4650UP0680G09**
765	30.12	**HF4650UP0765E09**	**HF4650UP0765C09**	**HF4650UP0765B09**	**HF4650UP0765D09**	**HF4650UP0765A09**	**HF4650UP0765G09**
850	33.46	**HF4650UP0850E09**	**HF4650UP0850C09**	**HF4650UP0850B09**	**HF4650UP0850D09**	**HF4650UP0850A09**	**HF4650UP0850G09**

For other inner sideflexing radius see previous and next page

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

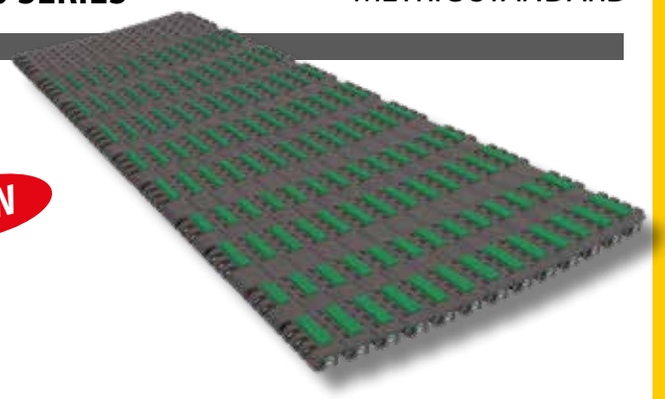



8,7 mm (0.343") THICKNESS
RUBBERIZED SURFACE

NEW

For traditional left, right or "**U**" turn conveying.

- **Belt widths:** from 340 mm (13.39") to 1020 mm (40.16') in 85 mm (3.35") increments
- **Belt inner radius:** from 600 mm (23.62") to 1450 mm (57.09")
- **Belt weight:** 8,20 kg/m^2 (1.68lbs/ft^2)
- **Working Load (at 25°C/77°F):** 25000 N/m (1,713 lbs/ft)
- **Materials:** UP Ultra Perfomance Homopolymer Delrin® for module
  PBT for pin
  Thermoplastic TPE (70 ShA hardness) for rubber

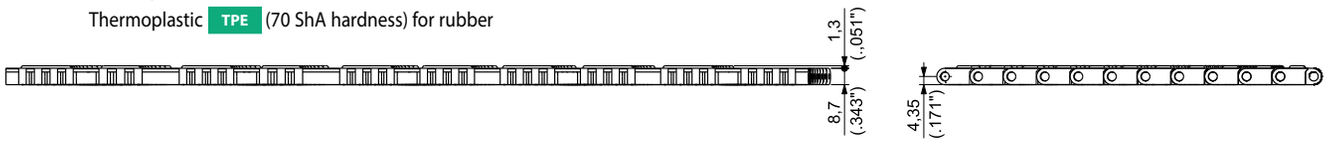

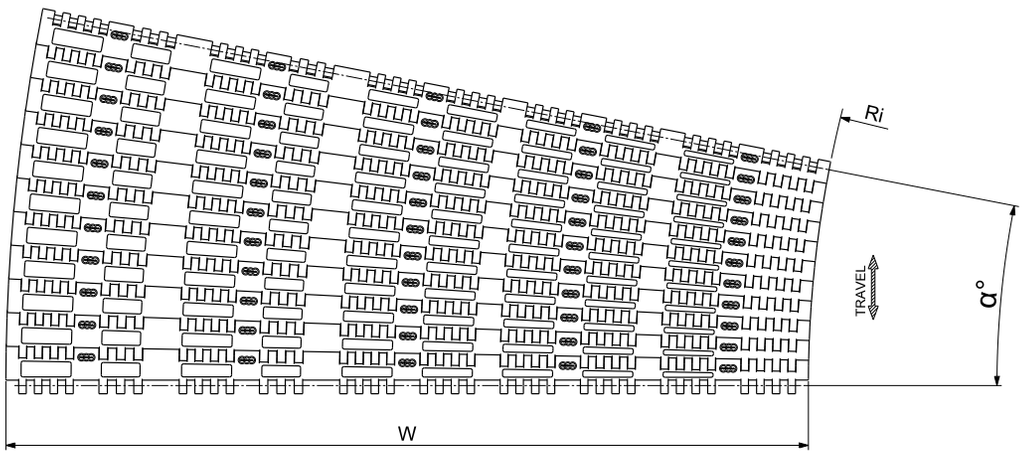

Materials see page 14
Sprockets see pages 280
Modular transfer plates see pages 353÷354
Applications see page 24

INNER SIDEFLEXING RADIUS Ri = 1365 mm (53.74")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**HF4650UP0340E10**	**HF4650UP0340C10**	**HF4650UP0340B10**	**HF4650UP0340D10**	**HF4650UP0340A10**	**HF4650UP0340G10**
425	16.73	**HF4650UP0425E10**	**HF4650UP0425C10**	**HF4650UP0425B10**	**HF4650UP0425D10**	**HF4650UP0425A10**	**HF4650UP0425G10**
510	20.08	**HF4650UP0510E10**	**HF4650UP0510C10**	**HF4650UP0510B10**	**HF4650UP0510D10**	**HF4650UP0510A10**	**HF4650UP0510G10**
595	23.43	**HF4650UP0595E10**	**HF4650UP0595C10**	**HF4650UP0595B10**	**HF4650UP0595D10**	**HF4650UP0595A10**	**HF4650UP0595G10**
680	26.77	**HF4650UP0680E10**	**HF4650UP0680C10**	**HF4650UP0680B10**	**HF4650UP0680D10**	**HF4650UP0680A10**	**HF4650UP0680G10**
765	30.12	**HF4650UP0765E10**	**HF4650UP0765C10**	**HF4650UP0765B10**	**HF4650UP0765D10**	**HF4650UP0765A10**	**HF4650UP0765G10**

INNER SIDEFLEXING RADIUS Ri = 1450 mm (57.09")

WIDTH W		PART NUMBER Curve angle α					
mm	inches	30°	45°	60°	75°	90°	180°
340	13.39	**HF4650UP0340E11**	**HF4650UP0340C11**	**HF4650UP0340B11**	**HF4650UP0340D11**	**HF4650UP0340A11**	**HF4650UP0340G11**
425	16.73	**HF4650UP0425E11**	**HF4650UP0425C11**	**HF4650UP0425B11**	**HF4650UP0425D11**	**HF4650UP0425A11**	**HF4650UP0425G11**
510	20.08	**HF4650UP0510E11**	**HF4650UP0510C11**	**HF4650UP0510B11**	**HF4650UP0510D11**	**HF4650UP0510A11**	**HF4650UP0510G11**
595	23.43	**HF4650UP0595E11**	**HF4650UP0595C11**	**HF4650UP0595B11**	**HF4650UP0595D11**	**HF4650UP0595A11**	**HF4650UP0595G11**
680	26.77	**HF4650UP0680E11**	**HF4650UP0680C11**	**HF4650UP0680B11**	**HF4650UP0680D11**	**HF4650UP0680A11**	**HF4650UP0680G11**

For other inner sideflexing radius see previous page

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




SUITABLE FOR CHAINS:

- **4650**
- **HF 4650**

MATERIALS	
SPROCKETS:	PA POLYAMIDE

NEW

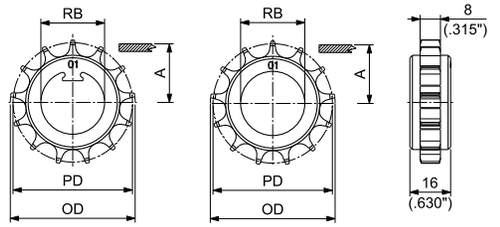


ROUND BORE - DRIVE ROUND BORE - IDLER

MACHINED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	BORE SIZE	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		REFERENCE N.*	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	mm	inch	mm	inch	mm	inch		DRIVE	IDLER	Kg	lbs
13	30	46,86	1.844	49,0	1.929	19,07	0.751	01	**MPBAT4650133001**	**MPBAF4650133001**	0,01	0.022

*Reference N. matches with the number marked in the pocket underneath the belt.
For more detailed information, contact REGINA Technical Department.

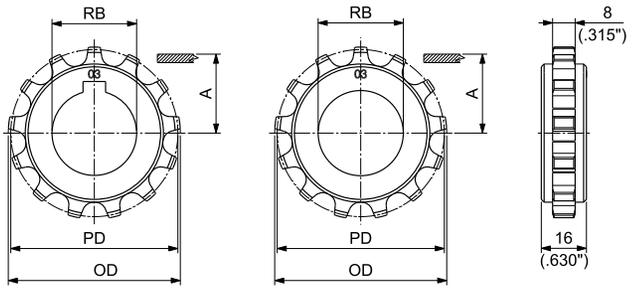

ROUND BORE - DRIVE ROUND BORE - IDLER

MACHINED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	BORE SIZE	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		REFERENCE N.*	PART NUMBER ROUND BORE RB		WEIGHT	
	mm	mm	inch	mm	inch	mm	inch		DRIVE	IDLER	Kg	lbs
		53,06	2.089	55,0	2.165	22,16	0.872	02	**MPBAT4650133002**	**MPBAF4650133002**	0,02	0.044
		59,26	2.333	61,0	2.402	25,26	0.994	03	**MPBAT4650133003**	**MPBAF4650133003**	0,03	0.066
		65,46	2.577	67,0	2.638	28,36	1.117	04	**MPBAT4650133004**	**MPBAF4650133004**	0,03	0.066
		71,65	2.821	73,0	2.874	31,45	1.238	05	**MPBAT4650133005**	**MPBAF4650133005**	0,05	0.110
		77,85	3.065	79,5	3.130	34,55	1.360	06	**MPBAT4650133006**	**MPBAF4650133006**	0,06	0.132
		84,03	3.308	85,5	3.366	37,64	1.482	07	**MPBAT4650133007**	**MPBAF4650133007**	0,07	0.154
		90,26	3.554	92,0	3.622	40,75	1.604	08	**MPBAT4650133008**	**MPBAF4650133008**	0,09	0.198
		96,44	3.797	98,5	3.878	43,84	1.726	09	**MPBAT4650133009**	**MPBAF4650133009**	0,10	0.221
13	30	102,63	4.041	104,5	4.114	46,93	1.848	10	**MPBAT4650133010**	**MPBAF4650133010**	0,12	0.265
		108,89	4.287	109,0	4.291	50,06	1.971	11	**MPBAT4650133011**	**MPBAF4650133011**	0,14	0.309
		115,16	4.534	115,5	4.547	53,19	2.094	12	**MPBAT4650133012**	**MPBAF4650133012**	0,15	0.331
		121,43	4.781	121,5	4.783	56,33	2.218	13	**MPBAT4650133013**	**MPBAF4650133013**	0,17	0.375
		127,61	5.024	127,5	5.020	59,42	2.339	14	**MPBAT4650133014**	**MPBAF4650133014**	0,20	0.441
		133,88	5.271	133,5	5.256	62,55	2.463	15	**MPBAT4650133015**	**MPBAF4650133015**	0,22	0.485
		139,82	5.505	140,0	5.512	65,52	2.579	16	**MPBAT4650133016**	**MPBAF4650133016**	0,24	0.529
		146,08	5.751	146,0	5.748	68,65	2.703	17	**MPBAT4650133017**	**MPBAF4650133017**	0,26	0.573
		152,27	5.995	152,0	5.984	71,74	2.824	18	**MPBAT4650133018**	**MPBAF4650133018**	0,27	0.639

*Reference N. matches with the number marked in the pocket underneath the belt.
For more detailed information, contact REGINA Technical Department.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

Matveyor®

2″ Pitch Heavy Duty Raised Rib Belts



INDUSTRIES AND APPLICATIONS

Suitable for handling mainly loose products, such as plastic and glass bottles, aluminium & steel cans, in heavy duty applications.

INDUSTRIES

Bottling and canning

Food filling

Container manufacturing

APPLICATIONS

Pasteurizers

Warmers

Coolers


Accumulation tables

FEATURES

- Optimized ratio rib thickness/ribs spacing and special clips design guarantee uniform top surface and high support of the most unstable products such as PET bottles with petaloid bottom.



- Optimum combination open area / mechanical strength allows very good liquid drainage and high product load with long center to center distances.

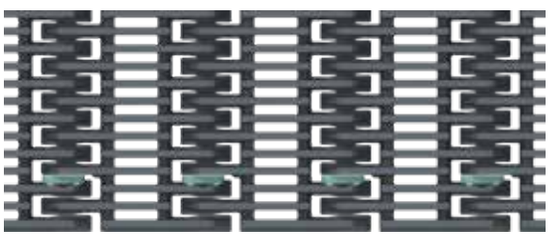

- Clips integrated in the modules for seamless product support at the edges of the belt.



- Contrasting colour of the integrated clip makes it easy to identify the clip itself for safer working conditions.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BELT ASSEMBLY



1) Position clip on module and point screwdriver at an angle in the clip slot.

REQUIRED TOOLS
- Use a flathead screwdriver narrower than clip slot



2) Push clip down with screwdriver until it snaps into place.



BELT DISASSEMBLY



1) Point screwdriver in clip slot and start leveraging outward.

REQUIRED TOOLS
- Use a flathead screwdriver narrower than clip slot



2) Keep leveraging until clip is extracted.



Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved





14,2 mm (0.580") THICKNESS
RAISED RIB
SEAMLESS PRODUCT SUPPORT AT THE EDGES OF THE BELT

NEW

3135 belt is ideal for pasteurizer applications where the most unstable products such as PET bottles with petaloid bottom have to be conveyed.
The raised rib surface shows no discontinuity between modules both along the belt width and the belt travel direcion, allowing containers to slide accross easily without the risk of product tippage throughout the tunnel pasteurizer.

- **Belt widths:** 304,8 mm (12") or wider in 76,2 mm (3")increments
- **Working Load (at 25°C/77°F):** 24670 N/m (1690 lbs/ft)
- **Belt weight:** 10,76 kg/m^2 (2.20 lbs/ft^2)

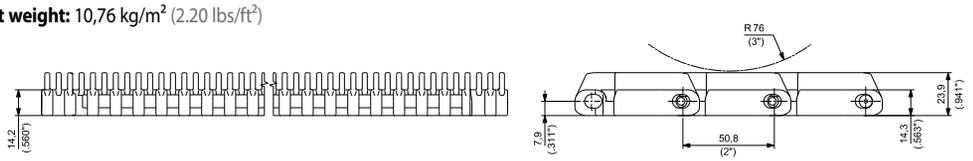

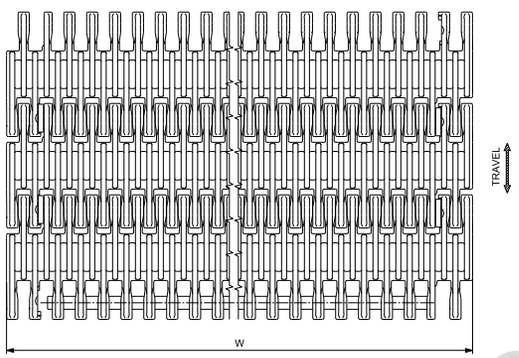

Materials see page 14
Combs see pages 285÷288
Sprockets see pages 289÷290
Applications see page 24


WIDTH W		MATERIALS	
		Module	Pin
		PP SPECIAL POLYPROPYLENE	
mm	inch	PART NUMBER	
304,8	12	**3135PP012**	POLYPROPYLENE
381,0	15	**3135PP015**	
457,2	18	**3135PP018**	
533,4	21	**3135PP021**	
609,6	24	**3135PP024**	
685,8	27	**3135PP027**	
762,0	30	**3135PP030**	
838,2	33	**3135PP033**	
914,4	36	**3135PP036**	
990,6	39	**3135PP039**	
1066,8	42	**3135PP042**	
1143,0	45	**3135PP045**	
1219,2	48	**3135PP048**	
1295,4	51	**3135PP051**	
1371,6	54	**3135PP054**	
1447,8	57	**3135PP057**	
1524,0	60	**3135PP060**	

Belts wider than 1524 mm (60") are available in 76,2 (3") increments.
To identify the Part Numbers, please substitute the last three digits of the PN with the desired width.
Example: for a 63" wide belt (=60+3 inches), the PN is "3135PP063".

Standard packaging:
Belts are supplied in the length requested by the customer.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TRANSFER COMBS

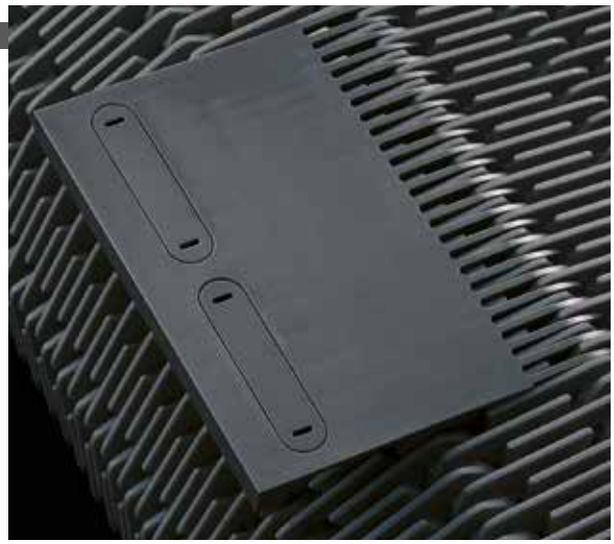


Combs are supplied complete with slot covers but without fastening screws.
Two fastening screws are required for each comb.
They can be ordered using P/N 16300005.
Special note: the comb fastening screws for 3135 belts are not interchangeable with fastening screws for 1110 belts.

MATERIALS		
COMBS:	DG	ACETAL RESIN
SCREWS*:	SS	STAINLESS STEEL


*Screws are not included in the combs.

LONG FINGER COMB

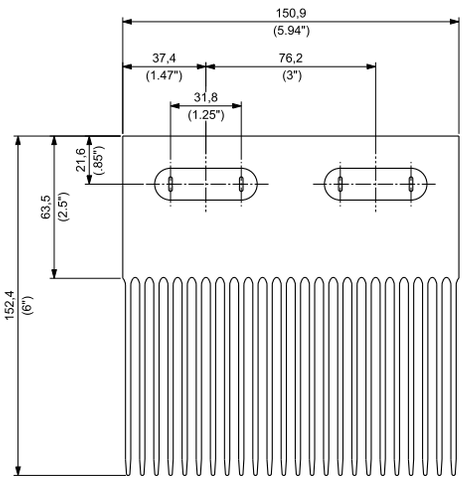


PART NUMBER **TC3000-01**

LONG FINGER COMB

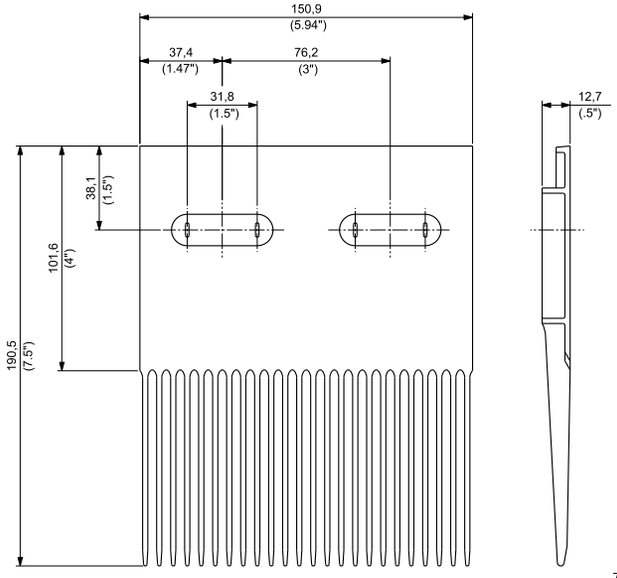


PART NUMBER **TC3000-02**




PART NUMBER **16300005**

SHORT FINGER COMB

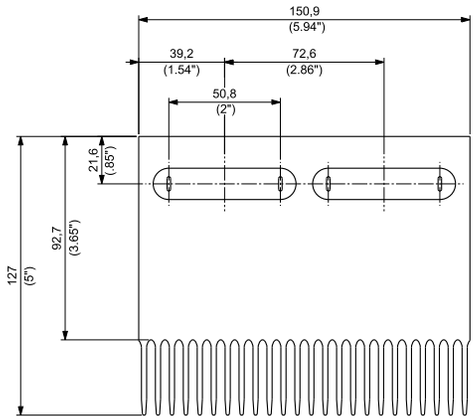

PART NUMBER **TC3000-03**

SHORT FINGER COMB

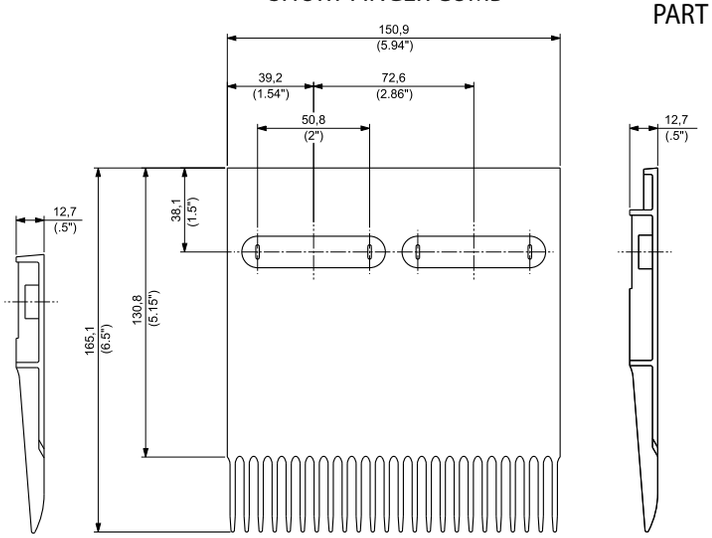

PART NUMBER **TC3000-04**


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

TRANSFER COMBS




Combs are supplied complete with slot covers, bushings
and fastening screws type hex socket button head ¼" x ⅝" UNI-ISO 7380.

MATERIALS		
COMBS:	DG	ACETAL RESIN
SCREWS:	SS	STAINLESS STEEL

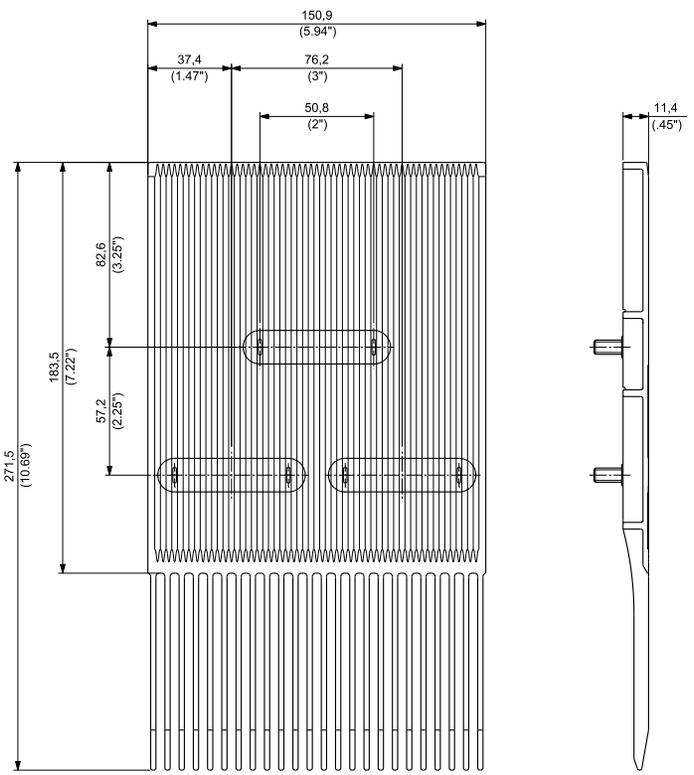

PART NUMBER **TC3000-05**

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

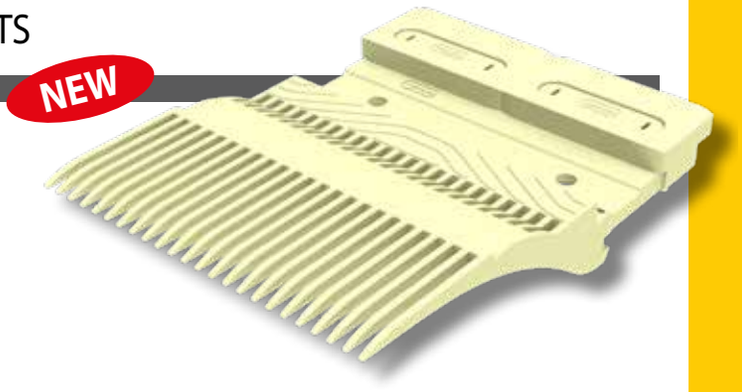



ACTIVE TRANSFER COMBS - METRIC STANDARD

Combs are supplied complete with slot covers, bushings and fastening screws type hex socket cylindrical head M6X20 ISO 4762.
To be used in combination with USPMG ATM 0085 chain.

MATERIALS	
COMBS:	SPECIAL THERMOPLASTIC POLYMER*
SCREWS:	SS STAINLESS STEEL

*Suitable for working temperatures up to 104 °C (220 °F)

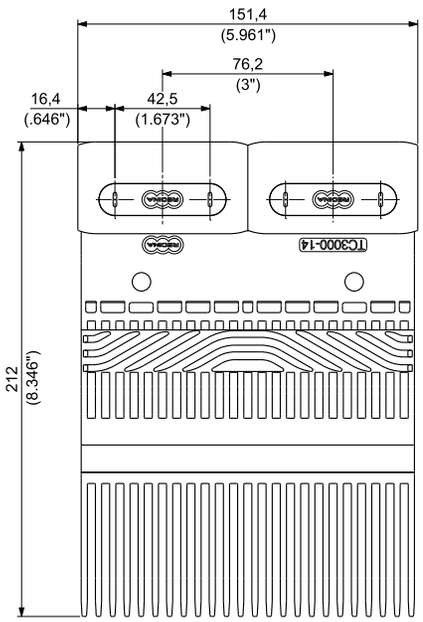


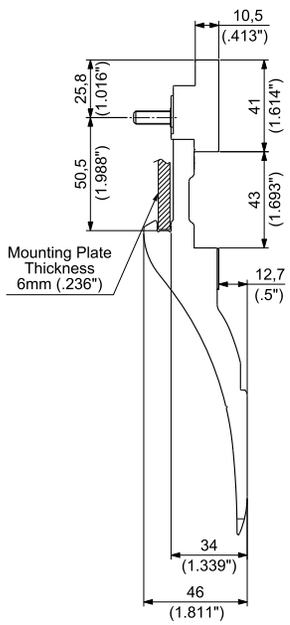



PART NUMBER **TC3000-14**


APPLICATION

Suitable for transfers between USPM, 793T or 793M Series and USPMG ATM 0085 chain:

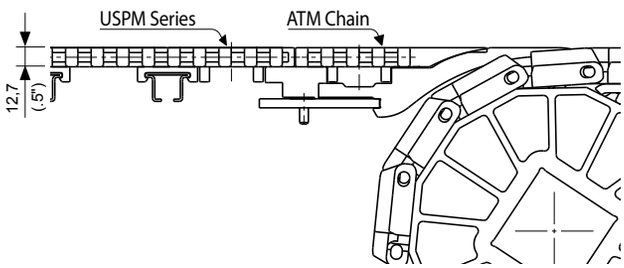

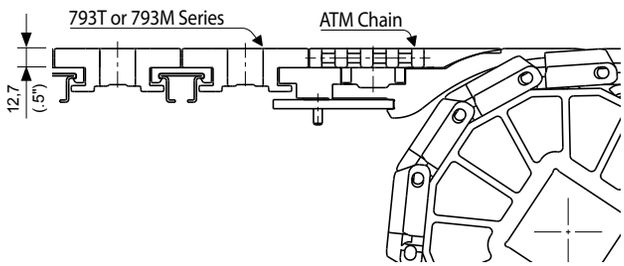

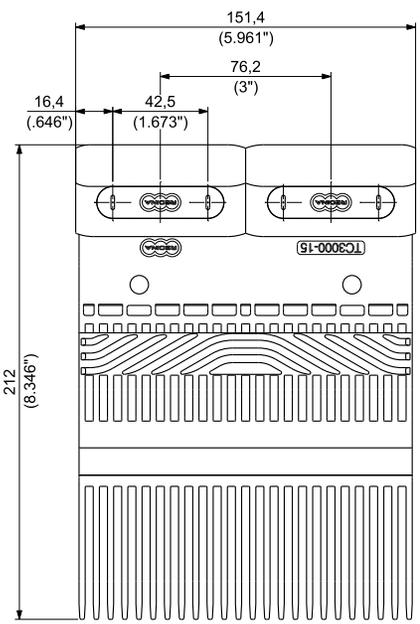


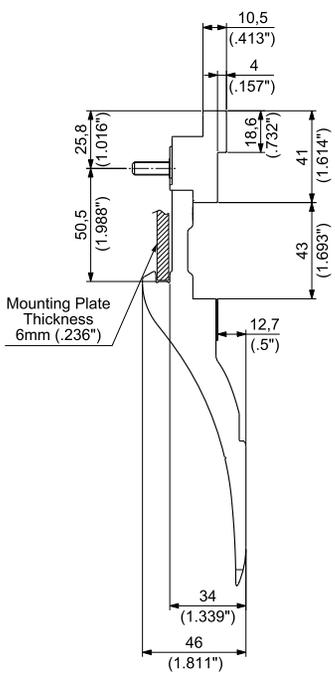


PART NUMBER **TC3000-15**


APPLICATION

Suitable for transfers between 1600, 783T or 783M Series and USPMG ATM 0085 chain:

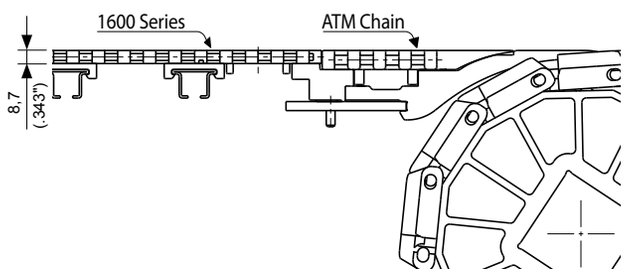

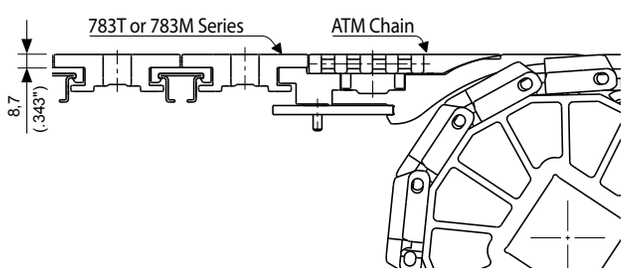

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

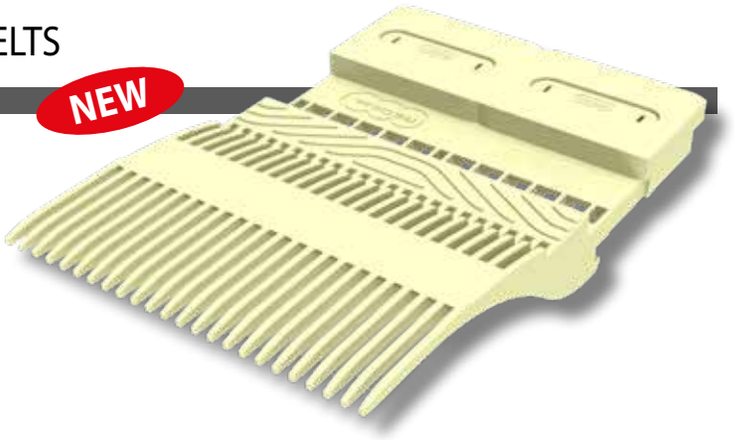


ACTIVE TRANSFER COMBS - IMPERIAL STANDARD


Combs are supplied complete with slot covers, bushings and fastening screws type hex socket button head ¼" x 5/8" UNI-ISO 7380.
To be used in combination with 1305G ATM 450 chain.

MATERIALS	
COMBS:	SPECIAL THERMOPLASTIC POLYMER*
SCREWS:	SS STAINLESS STEEL

*Suitable for working temperatures up to 104 °C (220 °F)

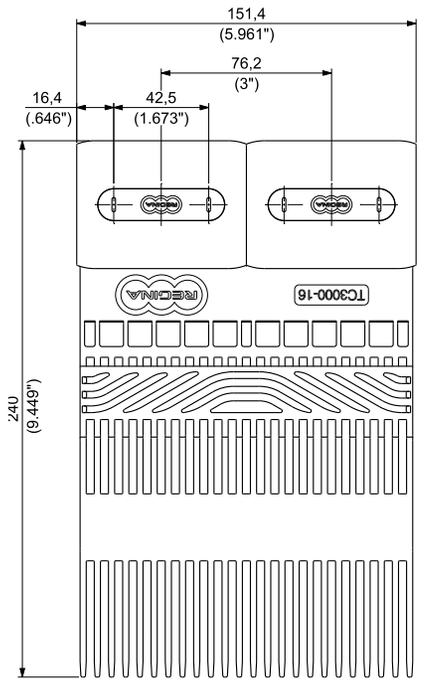



PART NUMBER **TC3000-16**

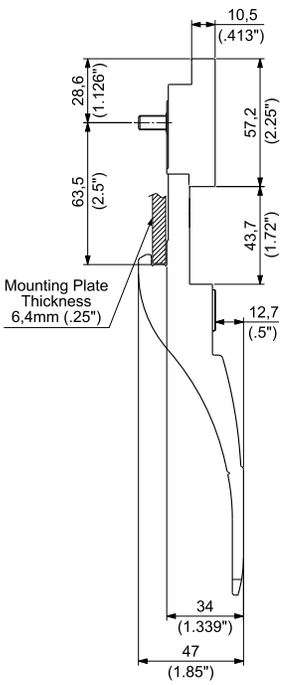


APPLICATION

Suitable for transfers between 1305 or USP Series and 1305G ATM 450 chain:

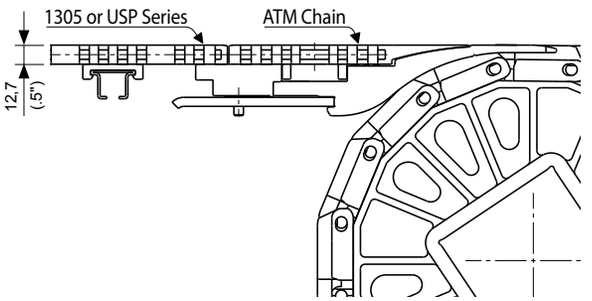

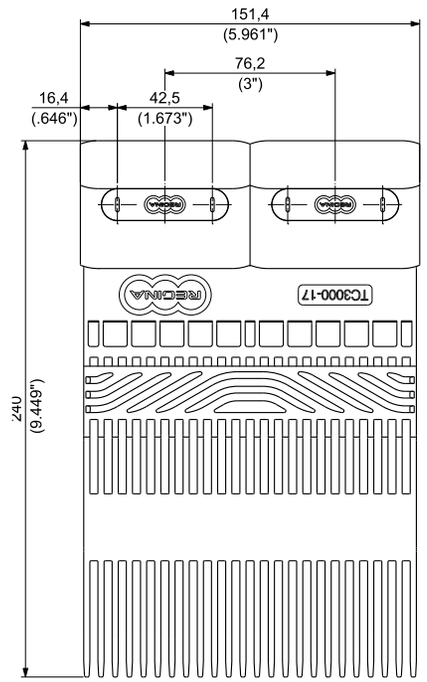


PART NUMBER **TC3000-17**

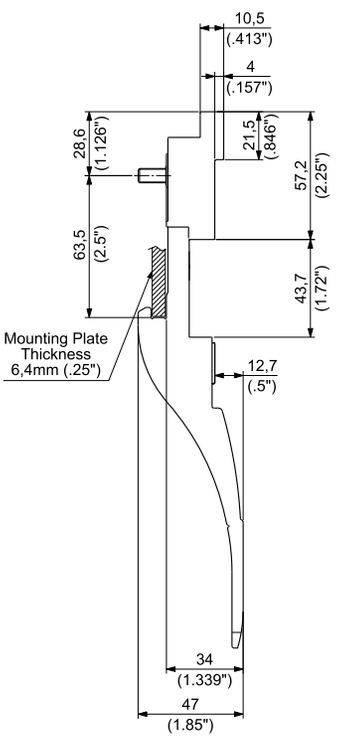

APPLICATION

Suitable for transfers between 7300 Series and 1305G ATM 450 chain:

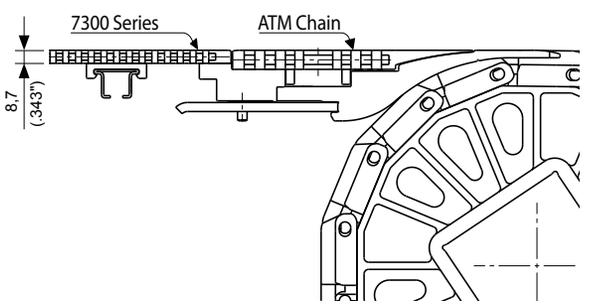

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUITABLE FOR CHAINS:

- **3135**

MATERIALS

SPROCKETS: WA ACETAL RESIN



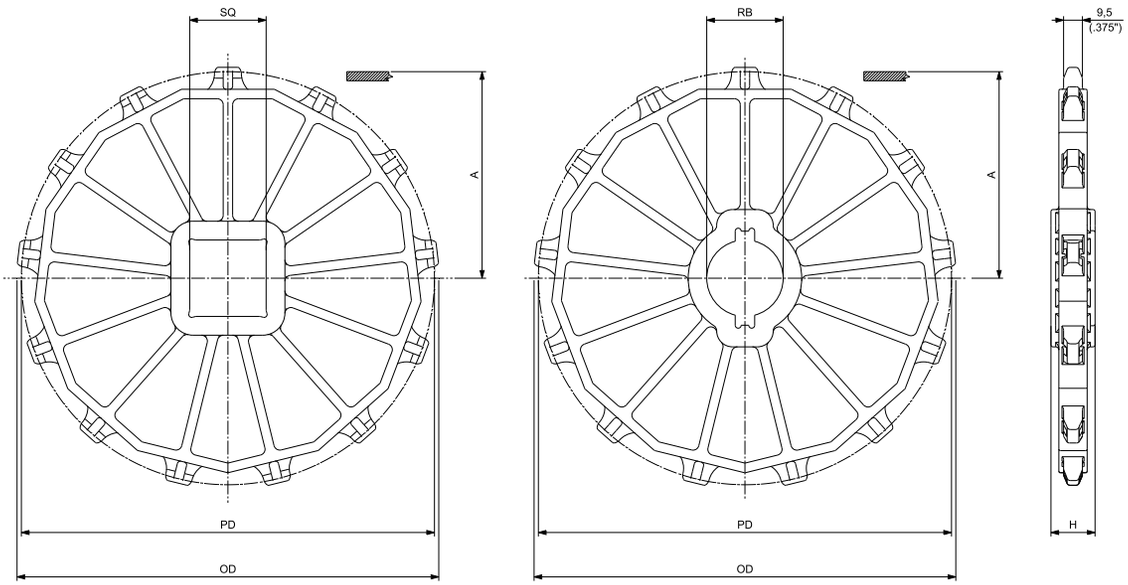

SQUARE BORE - DRIVE/IDLER

ROUND BORE - DRIVE

MOULDED SOLID DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ DRIVE/IDLER	PART NUMBER ROUND BORE RB DRIVE	HUB WIDTH H		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch			mm	inch	Kg	lbs
10	164,39	6.472	162,60	6.402	74,30	2.925	40		**19200026**	**19200028**	22,20	0.874	0,20	0.44
							50			**19200036**	22,20	0.874	0,21	0.46
							60		**19200024**		47,60	1.874	0,29	0.64
							65		**19200027**		47,60	1.874	0,25	0.55
								1½	**19200016**	**19200009**	22,20	0.874	0,19	0.43
								2	**19200017**	**19200010**	22,20	0.874	0,23	0.51
								2½	**19200018**		47,60	1.874	0,27	0.59
13	212,27	8.357	212,30	8.358	98,20	3.866	40		**19200025**		22,20	0.874	0,33	0.74
							60		**19200037**		47,60	1.874	0,44	0.97
							65			**19200033**	22,20	0.874	0,32	0.71
							65		**19200030**	**19200053**	47,60	1.874	0,39	0.86
							90		**19200031**	**19200045**	47,60	1.874	0,41	0.91
								1½	**19200019**	**19200001**	47,60	1.874	0,34	0.75
								2½		**19200011**	22,20	0.874	0,41	0.90
								2½	**19200020**		47,60	1.874	0,45	0.99
								3½	**19200021**	**19200046**	22,20	0.874	0,43	0.94
16	260,40	10.252	261,60	10.299	122,26	4.813	65		**19200034**		47,60	1.874	0,50	1.11
							90		**19200035**	**19200054**	47,60	1.874	0,54	1.19
							120		**19200038**		47,60	1.874	0,52	1.15
								2½	**19200014**	**19200050**	47,60	1.874	0,52	1.15
								3½	**19200015**	**19200051**	47,60	1.874	0,54	1.19

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:

- **3135**

MATERIALS		
SPROCKETS:	WA	ACETAL RESIN
SCREWS:	SS	STAINLESS STEEL
NUTS:	SS	STAINLESS STEEL



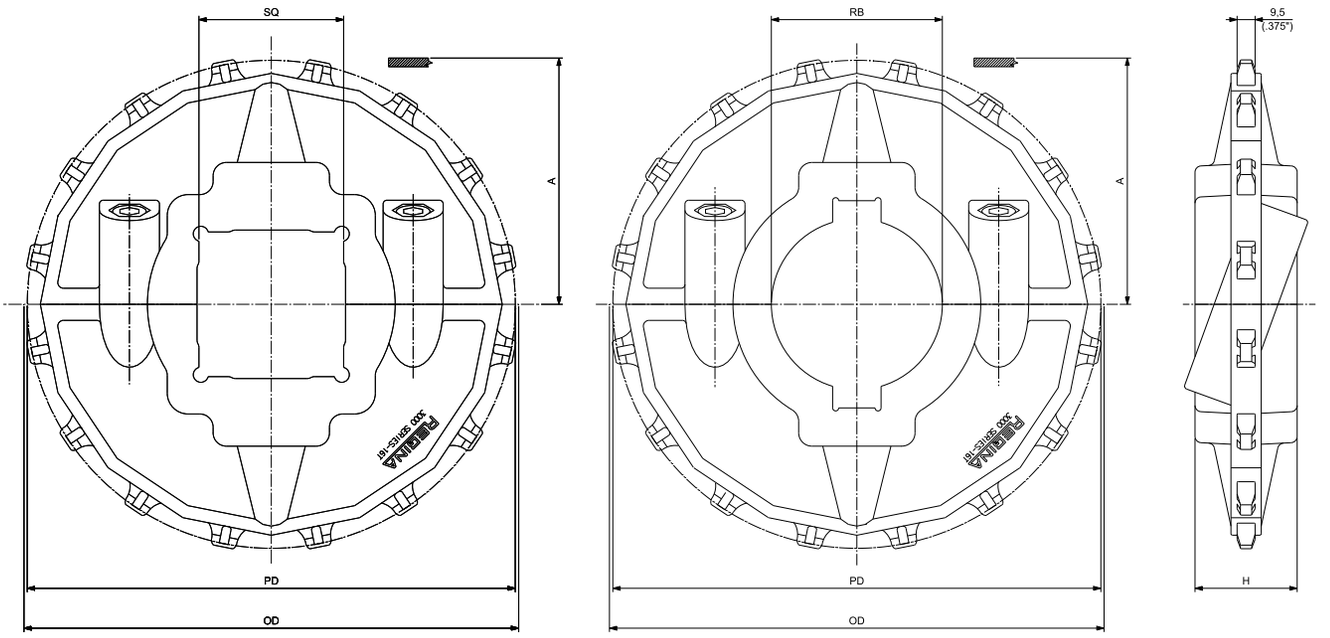

SQUARE BORE - DRIVE/IDLER

ROUND BORE - DRIVE

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER SQUARE BORE SQ DRIVE/IDLER	PART NUMBER ROUND BORE RB DRIVE	HUB WIDTH H		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch			mm	inch	Kg	lbs
16	260,40	10.252	261,40	10.291	122,26	4.813	65		**19200111W**	**19200109W**	54,00	2.126	1,85	4.08
							90		**19200114W**	**19200112W**	54,00	2.126	1,56	3.44
								2½	**19200105W**	**19200103W**	54,00	2.126	1,86	4.10
								3½	**19200108W**	**19200106W**	54,00	2.126	1,57	3.45

*In case of round bore, diameter is indicated. In case of square bore, side of the square is indicated.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

ULTOP®

1½" Pitch Heavy Duty UCC Chains

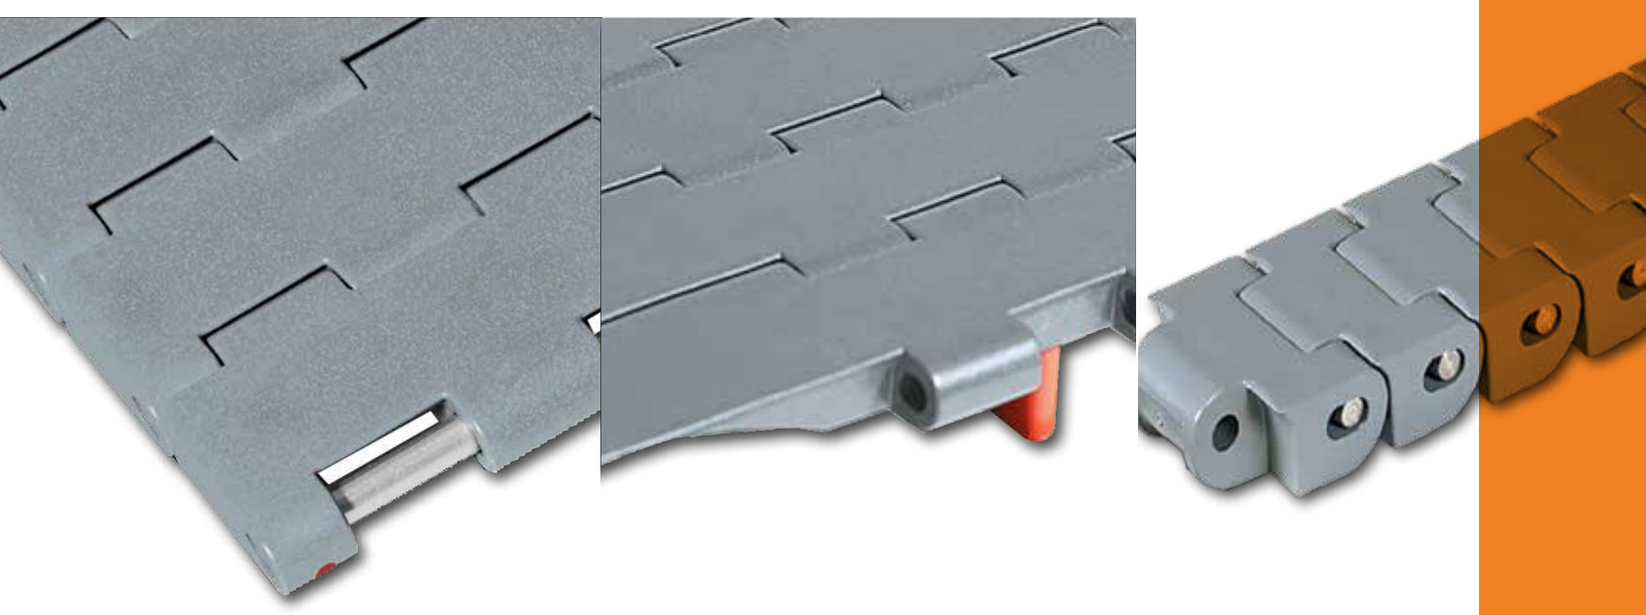

INDUSTRIES AND APPLICATIONS

Suitable for handling loose & packaged products, such as plastic & glass bottles and aluminium & steel cans, in heavy duty applications.

INDUSTRIES

Bottling and canning

Food filling

Container manufacturing (in particular glass bottles)

Consumer goods


APPLICATIONS

Depalletizer

Pressureless Inliners and Combiners

Single lane and Mass conveyors

Case conveyors

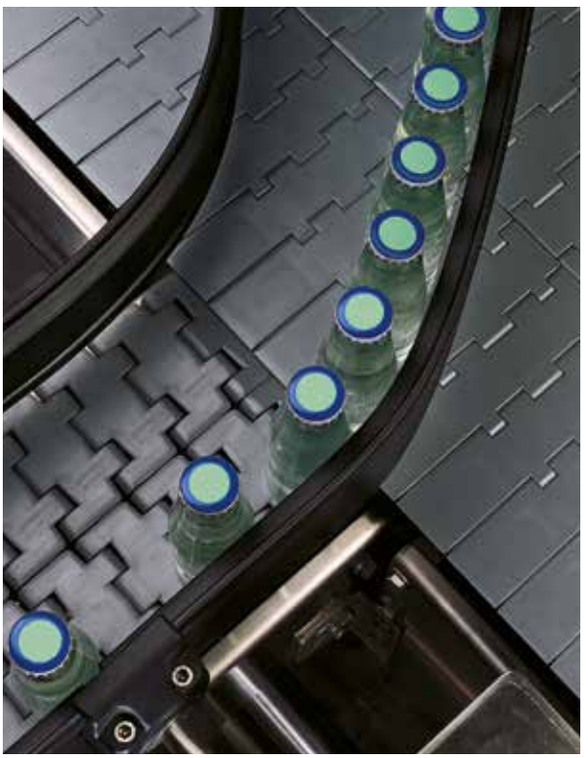

FEATURES

- Optimized edge profile combinated with completely closed surface, with no gaps even when engaging the sprockets, allow smooth side transfer of products, even in presence of different thicknesses due to normal wear.



- Chains equipped with stainless steel pins for the maximum mechanical and wear resistance.



- Retention special clip (Snapsert™) can be easily moved from either side allowing easy chain assembly and disassembly.




Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




12,7 mm (0.5") THICKNESS
SOLID TOP

Stainless steel pins for ideal performance in heavy duty applications.
A complete range of dedicated width chains. Completely closed surface, no gap between the modules, even with engaging in the sprockets. Particulary suitable for glass bottling lines and glass manufacturing industry.

DUPONT® KEVLAR® INSIDE

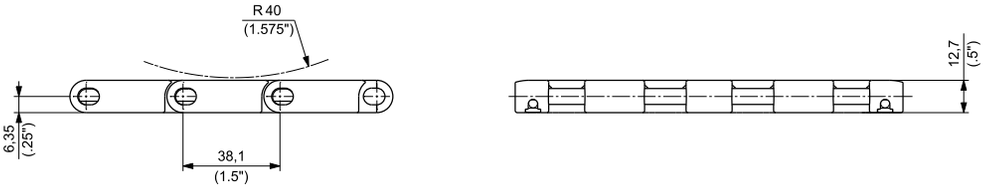

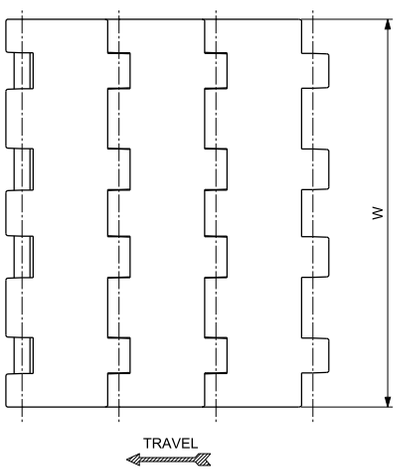

Materials see page 14
Sprockets see page 296
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA LOW FRICTION POLYESTER RESIN ULF	AUSTENITIC STAINLESS STEEL	UCC 325 SS	**66100111**	82,6	3.25	12,7	0.5	2505	563	1,26	0.85
		UCC 450 SS	**66100141**	114,3	4.50	12,7	0.5	3469	780	1,74	1.17
		UCC 600 SS	**66100161**	152,4	6.00	12,7	0.5	4625	1040	2,32	1.56
		UCC 750 SS	**66100151**	190,5	7.50	12,7	0.5	5781	1300	2,93	1.97
		UCC 1200 SS	**66100191**	304,8	12.00	12,7	0.5	9270	2061	4,64	3.12
		UCC 1500 SS	**66100181**	381,0	15.00	12,7	0.5	11590	2605	5,81	3.90
		UCC 1800 SS	**66100221**	457,2	18.00	12,7	0.5	13900	3125	6,97	4.69
		UCC 2400 SS	**66100231**	609,6	24.00	12,7	0.5	18540	4168	9,27	6.23
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2™		D2K UCC 325 SS	**D2K66100111**	82,6	3.25	12,7	0.5	2505	563	1,33	0.89
		D2K UCC 450 SS	**D2K66100141**	114,3	4.50	12,7	0.5	3469	780	1,83	1.23
		D2K UCC 600 SS	**D2K66100161**	152,4	6.00	12,7	0.5	4625	1040	2,43	1.64
		D2K UCC 750 SS	**D2K66100151**	190,5	7.50	12,7	0.5	5781	1300	3,07	2.06
		D2K UCC 1200 SS	**D2K66100191**	304,8	12.00	12,7	0.5	9270	2061	4,88	3.28
		D2K UCC 1500 SS	**D2K66100181**	381,0	15.00	12,7	0.5	11590	2605	6,10	4.10
		D2K UCC 1800 SS	**D2K66100221**	457,2	18.00	12,7	0.5	13900	3125	7,32	4.92
		D2K UCC 2400 SS	**D2K66100231**	609,6	24.00	12,7	0.5	18540	4168	9,73	6.54

Standard packaging: Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




ACTIVE TRANSFER MODULES
12,7 mm (0.5") THICKNESS
SOLID TOP

Active transfer modules UCCG ATM allow transfer of products between two 90° conveyor tracks without using dead plares. The special wing shaped module profile supports the products dynamically during transfer on the take-away belt.

DUPONT® KEVLAR® INSIDE

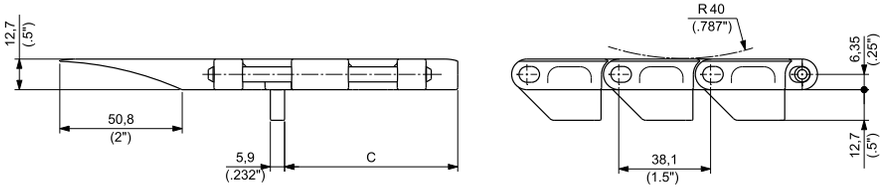

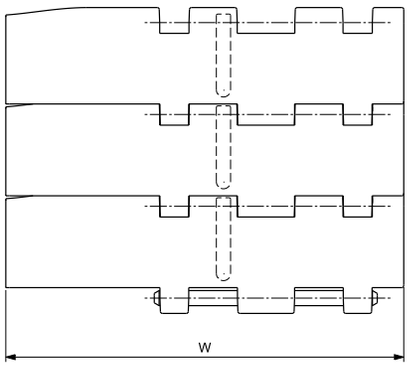

Materials see page 14
Sprockets see page 296
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		TRACKING GUIDE POSITION C		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA LOW FRICTION POLYESTER RESIN ULF	AUSTENITIC STAINLESS STEEL	UCCGATM 450 SS	66100331	165,1	6.50	12,7	0.5	71,4	2.81	3469	780	2,11	1.41
		UCCGATM 750 SS	66100341	241,3	9.50	12,7	0.5	139,5	5.49	5781	1.300	3,26	2.19
SPECIAL DELRIN ® REINFORCED WITH KEVLAR ® DK2		UCCGATM D2K 450 SS	D2K66100331	165,1	6.50	12,7	0.5	71,4	2.81	3469	780	2,22	1.49
		UCCGATM D2K 750 SS	D2K66100341	241,3	9.50	12,7	0.5	139,5	5.49	5781	780	3,43	2.31


Standard packaging:
Rolls of 3,048 m (10 feet)


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

15 mm (0.591") THICKNESS
SOLID TOP



Optimum support of the conveyed products, no risk for flight detachment (compared to two piece chains).
No gap between the plates even when engaging the sprockets.
Particularly suitable for packaging machines applications.

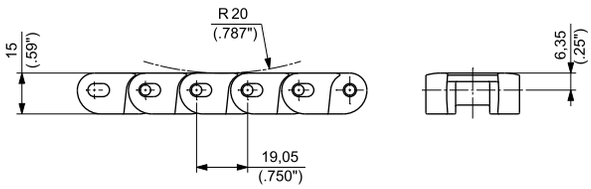



Materials see page 14
Sprockets see page 297
Applications see page 24

MATERIALS		ITEM DESCRIPTION	PART NUMBER	WIDTH W		PLATE THICKNESS		WORKING LOAD (25°C/77°F)		WEIGHT	
Plate	Pin			mm	inch	mm	inch	N	lbs	kg/m	lbs/ft
ULTRA LOW FRICTION POLYESTER RESIN **ULF**	AUSTENITIC STAINLESS STEEL	UCC 138 SS	66100321	34,92	1.37	15	0.591	1225	275	0,68	0.46


Standard packaging: Rolls of 3,048 m (10 feet)

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

SUITABLE FOR CHAINS:
• **UCC**

MATERIALS		
SPROCKETS:	PGF	REINFORCED POLYAMIDE
SCREW:	SS	STAINLESS STEEL
NUTS:	S+ZN	ZINC PLATED STEEL



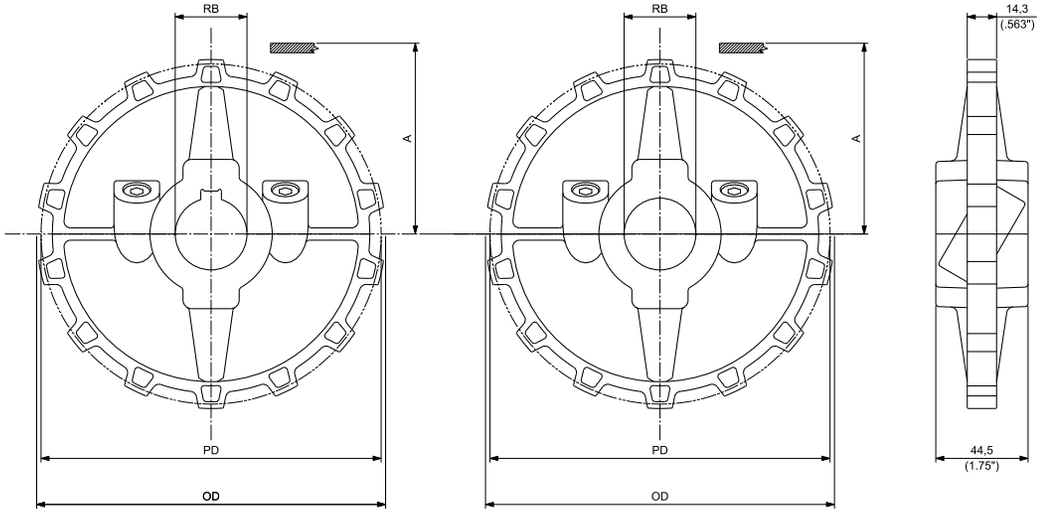

ROUND BORE - DRIVE

ROUND BORE - IDLER

MOULDED SPLIT DRIVE AND IDLER SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		BORE SIZE*		PART NUMBER ROUND BORE RB		WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch**	DRIVE	IDLER	Kg	lbs
							30		**UCCST1230**	**UCCSF1230**	0,36	0.80
							35		**UCCST1235**	**UCCSF1235**	0,35	0.77
							40		**UCCST1240**	**UCCSF1240**	0,34	0.75
								1	UCCST12254	UCCSF12254	0,37	0.82
12	147,21	5.796	146,80	5.780	67,30	2.650		1 3/16	UCCST12301	UCCSF12301	0,36	0.79
								1 1/4	UCCST12317	UCCSF12317	0,36	0.79
								1 3/8	UCCST12349	UCCSF12349	0,34	0.76
								1 7/16	UCCST12365	UCCSF12365	0,35	0.76
								1 1/2	UCCST12381	UCCSF12381	0,34	0.76
							30		**UCCST1430**	**UCCSF1430**	0,44	0.97
							35		**UCCST1435**	**UCCSF1435**	0,43	0.95
							40		**UCCST1440**	**UCCSF1440**	0,42	0.92
								1	UCCST14254	UCCSF14254	0,44	0.98
14	171,22	6.741	170,20	6.701	79,30	3.122		1 3/16	UCCST14301	UCCSF14301	0,44	0.96
								1 1/4	UCCST14317	UCCSF14317	0,46	1.01
								1 3/8	UCCST14349	UCCSF14349	0,43	0.94
								1 7/16	UCCST14365	UCCSF14365	0,43	0.94
								1 1/2	UCCST14381	UCCSF14381	0,43	0.94

*Diameter is indicated.
** Imperial round bore drive sprockets are supplied with setscrew. Metric round bore drive sprockets are supplied without setscrew.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUITABLE FOR CHAINS:

- **UCC138**

MATERIALS

SPROCKETS: S CARBON STEEL



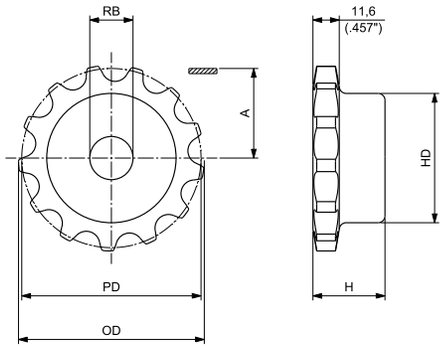

MACHINED SOLID SPROCKETS

N. TEETH	PITCH DIAMETER PD		OUTSIDE DIAMETER OD		WEAR STRIP POSITIONING A		HD		H		BORE SIZE*		PART NUMBER ROUND BORE RB	WEIGHT	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		Kg	lbs
9	55,70	2.193	56,9	2.24	19,20	0.756	32	1.26	30	1.18	12	0.47	**CMA021380900**	0,31	0.68
11	67,62	2.662	69,5	2.74	25,15	0.990	45	1.77	35	1.38	14	0.55	**CMA021381100**	0,57	1.26
13	79,60	3.134	81,9	3.22	31,15	1.226	57	2.24	35	1.38	14	0.55	**CMA021381300**	0,87	1.92
15	91,63	3.607	94,2	3.71	37,17	1.463	69	2.72	35	1.38	14	0.55	**CMA021381500**	1,24	2.74
17	103,67	4.081	106,5	4.19	43,19	1.700	80	3.15	35	1.38	16	0.63	**CMA021381700**	1,63	3.60
19	115,74	4.557	118,8	4.68	49,22	1.938	80	3.15	35	1.38	16	0.63	**CMA021381900**	1,82	4.01
21	127,82	5.032	131,0	5.16	55,26	2.176	90	3.54	40	1.57	20	0.79	**CMA021382100**	2,48	5.47
23	139,90	5.508	143,2	5.64	61,30	2.413	90	3.54	40	1.57	20	0.79	**CMA021382300**	2,71	5.98
25	152,00	5.984	155,4	6.12	67,35	2.652	90	3.54	40	1.57	20	0.79	**CMA021382500**	2,97	6.55

*Diameter is indicated (plain bore).


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop® Matveyor®

Magnetic Curves

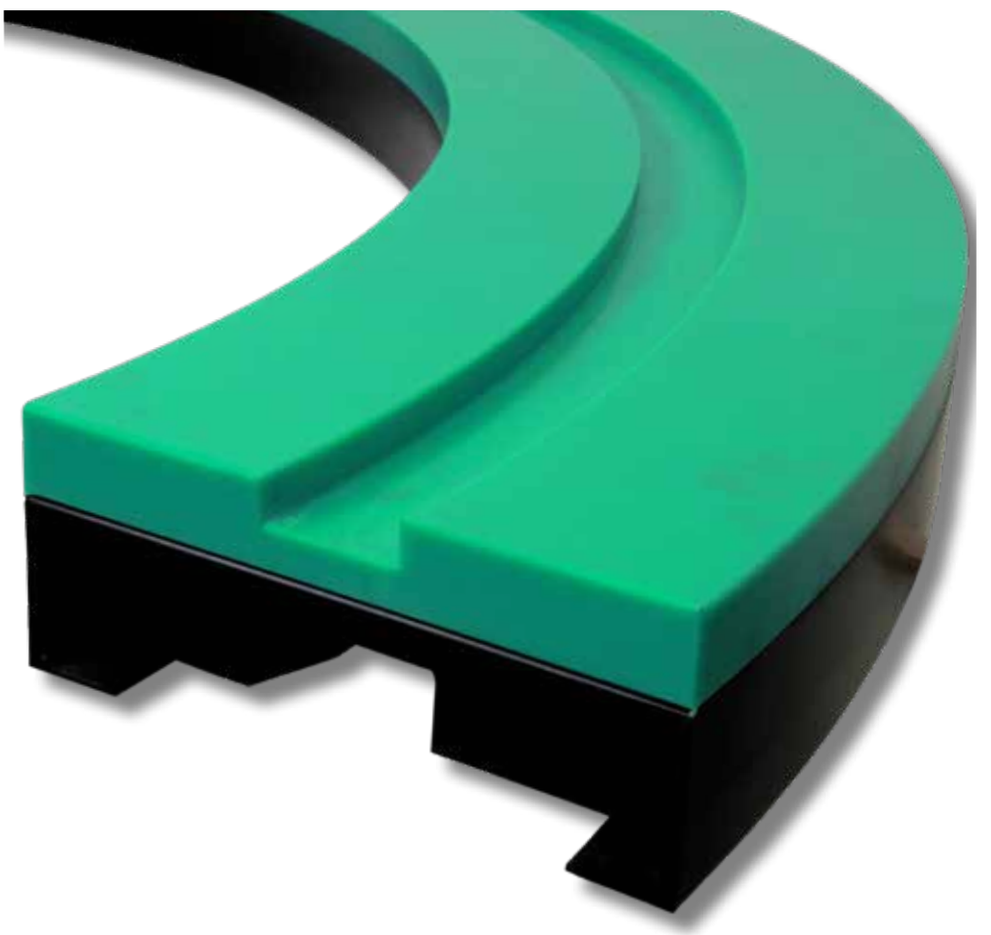

MAGNETIC CURVES

Magnetic curves are a combined system for both steel and plastic chains.
Two magnets, integrated underneath the track and connected by a steel plate, creating a strong magnetic field that results in an even force keeping down steel chains as well as plastic chains with steel pins running in the curve.
The position of the magnets has been carefully studied in order to get the ideal distribution of the magnetic field, with the following results:

- No chain pulsation effect when the chain is being pulled through the curve.
- Chains perfectly flat in curve without tilting



The REGINA magnetic curve consists of mainly N. 3 parts:

1 Machined upper plastic part of the curve, normally supplied with the standard SUPREME-A material which is a virgin UHMWPE (about 7 milions gr/mole) with an optimum wear resistance.


2 Machined return part of the curve, supplied in UHMWPE material with 4 millions gr/mole which is suitable even for the most demanding applications. This part is jointed to the upper part by stainless steel self-tapping screws.

3 Return guide shoe, made in in UHMWPE material with 4 millions gr/mole, to bring the chain at the right height to enter the return part of the curve.


For special applications involving very high speeds and reduced lubrication conditions new e-SLIDE and SUPREME-S materials can be used to guarantee higher PV (Pressure-Velocity) loads according to the application needs.

CURVE MATERIAL	FEATURES	CHAIN TYPE	APPLICATIONS
SUPREME -A STANDARD MATERIAL	Ultra high molecular weight polyethylene (about 7 million gr/mole) with good wear resistance and low coefficient of friction.	For steel and plastic chains.	Ideal in low/medium speed applications in dry or lubricated conditions.
e-SLIDE	New ultimate Ultra High Molecular Weight Polyethylene (molecular density of 9.000.000 g/mol). Thanks to special lube additives compounded with the material, provides superior sliding performance and excellent wear resistance of chains and belts in high-speeds and dry running application.	For steel and plastic chains.	Suitable in high speed applications in dry or reduced lubricated conditions.
SUPREME -S	Special high grade and oil-filled polyamide with superior abrasion resistance and extremely high PV limit. Dry running only.	For plastic chains.	Suitable in high speed applications in dry running conditions.

e-SLIDE FEATURES AND BENEFITS




COF between chain and wearstrips/curves

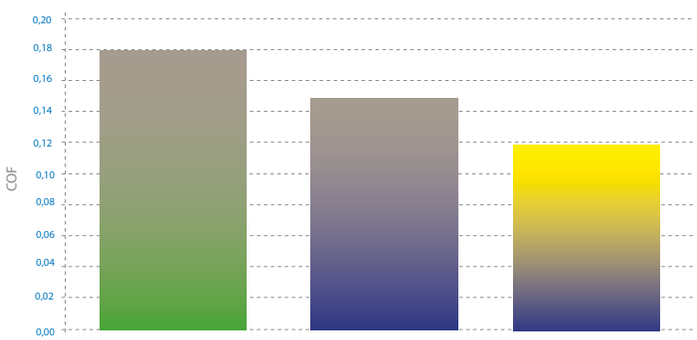

UP chain + UHMWPE wearstrips/curves
UP chain + e-SLIDE wearstrips/curves
e-F.A.S.T. chain + e-SLIDE wearstrips/curves

Chain pull trend in a sideflexing conveyor system

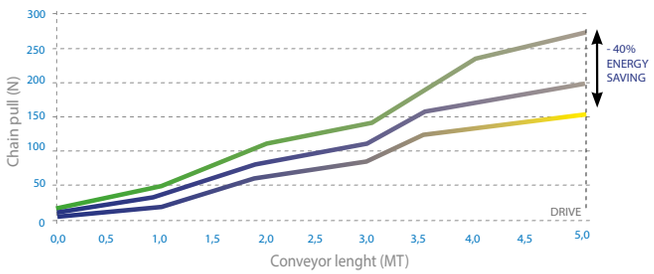


UP chain + UHMWPE wearstrips/curves
UP chain + e-SLIDE wearstrips/curves
e-F.A.S.T. chain + e-SLIDE wearstrips/curves

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


SUPPLY INFORMATIONS

REGINA magnetic curves are supplied as follow:

- The upper and return part are connected by stainless steel self-tapping screws Ø 4 mm.

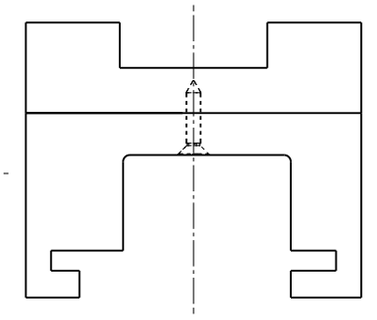


- All of REGINA curves are supplied with the return guide shoe equipped with N.4 brass threaded inserts M8 already assembled.

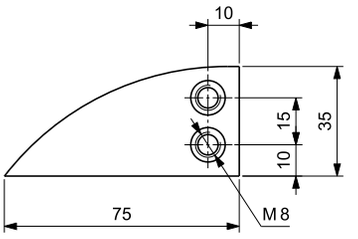


INSTALLATION OF THE MAGNETIC CURVES

REGINA magnetic curves can be installed on the conveyor in the two following ways:

1) Fixing the outer and the inner side of the curve (upper and return part jointed together) to the conveyor frame. In this case the curve is installed with the upper and return part connected as supplied by REGINA and it is fixed to the conveyor making lateral holes on the return part of the curve and using brass threaded inserts M10. These inserts can be **ORDERED SEPARATELY** with the P/N **I-SCTBM10** (component **NOT supplied** with the curves).

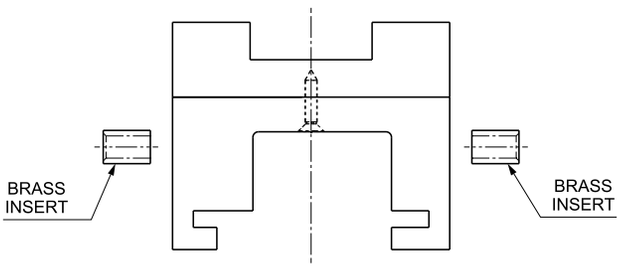


2) The upper and return part of the curve can be installed **separately** on the conveyor. In this case the curve, which is supplied with the upper and return part connected with stainless steel self-tapping screws, must be disassembled and fixed to a conveyor crossbar using the holes present on both parts of the curve. The screws to fix the upper and lower part of the curve to the crossbar must have a proper lenght depending on the conveyor structure. Those screws are **NOT** supplied by REGINA.

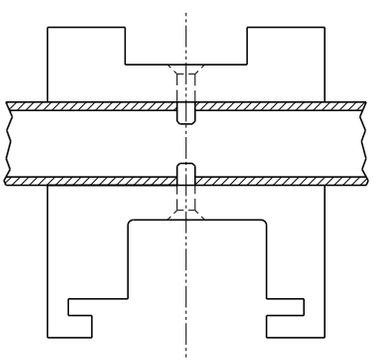


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REFERENCE TABLE





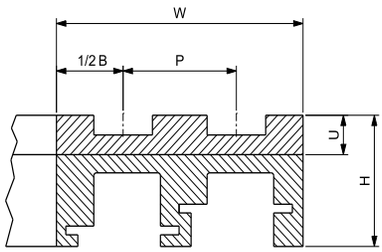

CHAIN TYPE				RADIUS [1] R mm	TRANSVERSAL PITCH P mm	BASIC WIDTH B mm	INFEED LENGHT L mm	UPPER PART HEIGHT U mm	TOTAL HEIGHT H mm	VERSION NUMBER	SEE PAGE
SERIES	WIDTH	THICKNESS mm	HINGE WIDTH mm								
981M PHD 981M PHDG 981M	3 1/4" 83.8 mm	3	42	500	85	100	0	27	82[2]/90[3]	F 01	302
							100		90	F 02	303
						111	100		90	F 03	304
					89	100	125		82	F 04	305
				680	-	100	100		82	F 05	306
				750	85	100	100		82[2]/90[3]	F 06	307
880M RG		4				111	100		90	F 07	308
				860	-	100	125		82	F 08	309
				1000	-	100	0		82	F 09	310
					85	111	100		90	F 10	311
981M PHD 981M	4 1/2"	3	42	500	120	129	125	27	90	F 11	312
				610	120	129	125		90	F 12	313
					117	129	0		90	F 13	314
981M PHD 981M PHDG 981M	7 1/2"	3	42	610	196	214	125	27	90	F 14	315
				860	-	214	0		82	F 15	316
				1000	-	214	0		82	F 16	317
9PHD 9857M PHDG 9857M 882M HFX 882M	7 1/2"	3 4,8	57	610 [4]	195	200	100	32	87[2]/95[3]	H 01	318
				750	195	200	100		87[2]/95[3]	H 02	319
				860	-	214	0		87	H 03	320
				1000	-	214	0		87	H 04	321
882M HFX 882M	10" 12"	4,8	57	860	-	290	0	32	87	H 05	322
						340				H 06	323
LBP 882M	7 1/2"	4,8	57	860	-	214	0	32	95	L 01	324
	10"					290				L 02	325
	12"					340				L 03	326
650M	83.8 mm	8,7	79	500	85	100	0	27	82[2]/90[3]	S 01	327
782M 783M	83.8 mm	8,7	42	500	85	100	0	27	82[2]/90[3]	M 01	328
							100		90	M 02	329
						111	100		90	M 03	330
				750	85	100	100		90	M 04	331
						111	100		90	M 05	332
				1000	85	100	0		90	M 06	333
793M	83.8 mm	12,7	42	500	85	100	0	27	82[2]/90[3]	U 01	334
							100		90	U 02	335
						111	100		90	U 03	336
				750	85	100	100		90	U 04	337
				1000	85	100	0		90	U 05	338
793M	4 1/2"	12,7	42	500	120	129	125	27	90	U 06	339

[1] First track is intended.
[2] For curves with one track.
[3] For multi tracks curves.
[4] 882M and HFX 882M series only.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 01


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	-




Single track

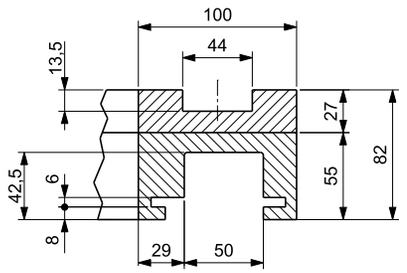


Multi track

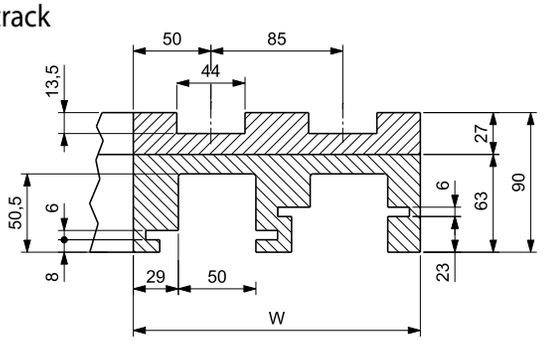

Radius

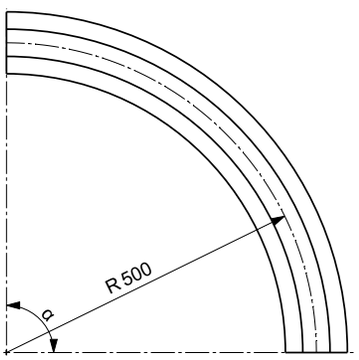

Return guide shoe

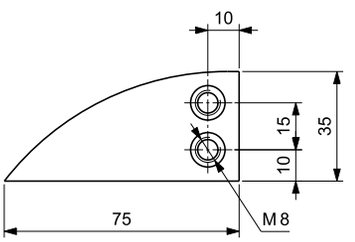

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02AAY/110	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02AAY/110

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MF01AFX/100**	**MF01AEX/100**	**MF01ACX/100**	**MF01ABX/100**	**MF01ALX/100**	**MF01AAX/100**
2	185	**MF02AFY/110**	**MF02AEY/110**	**MF02ACY/110**	**MF02ABY/110**	**MF02ALY/110**	**MF02AAY/110**
3	270	**MF03AFY/110**	**MF03AEY/110**	**MF03ACY/110**	**MF03ABY/110**	**MF03ALY/110**	**MF03AAY/110**
4	355	**MF04AFY/110**	**MF04AEY/110**	**MF04ACY/110**	**MF04ABY/110**	**MF04ALY/110**	**MF04AAY/110**
5	440	**MF05AFY/110**	**MF05AEY/110**	**MF05ACY/110**	**MF05ABY/110**	**MF05ALY/110**	**MF05AAY/110**
6	525	**MF06AFY/110**	**MF06AEY/110**	**MF06ACY/110**	**MF06ABY/110**	**MF06ALY/110**	**MF06AAY/110**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 02


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	100




Single track

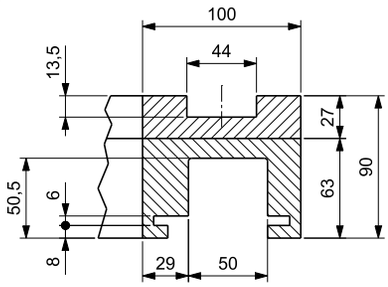


Multi track

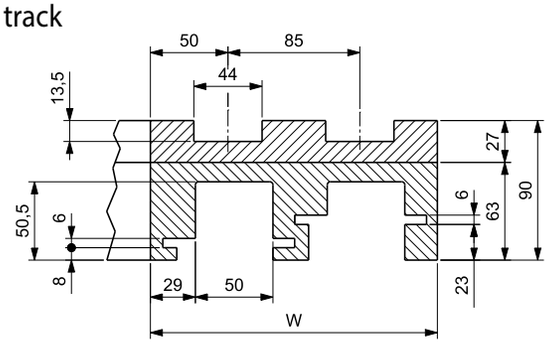

Radius

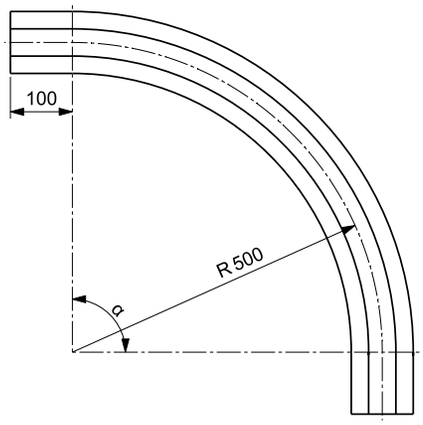

Return guide shoe

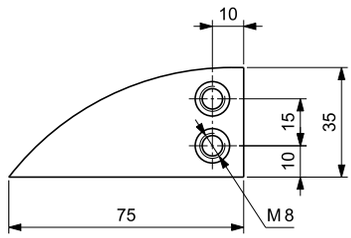

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02AAY/111	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02AAY/111

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MF01AFY/101**	**MF01AEY/101**	**MF01ACY/101**	**MF01ABY/101**	**MF01ALY/101**	**MF01AAY/101**
2	185	**MF02AFY/111**	**MF02AEY/111**	**MF02ACY/111**	**MF02ABY/111**	**MF02ALY/111**	**MF02AAY/111**
3	270	**MF03AFY/111**	**MF03AEY/111**	**MF03ACY/111**	**MF03ABY/111**	**MF03ALY/111**	**MF03AAY/111**
4	355	**MF04AFY/111**	**MF04AEY/111**	**MF04ACY/111**	**MF04ABY/111**	**MF04ALY/111**	**MF04AAY/111**
5	440	**MF05AFY/111**	**MF05AEY/111**	**MF05ACY/111**	**MF05ABY/111**	**MF05ALY/111**	**MF05AAY/111**
6	525	**MF06AFY/111**	**MF06AEY/111**	**MF06ACY/111**	**MF06ABY/111**	**MF06ALY/111**	**MF06AAY/111**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 03


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	111	85	100




Single track

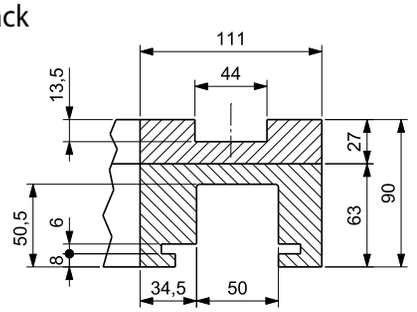


Multi track

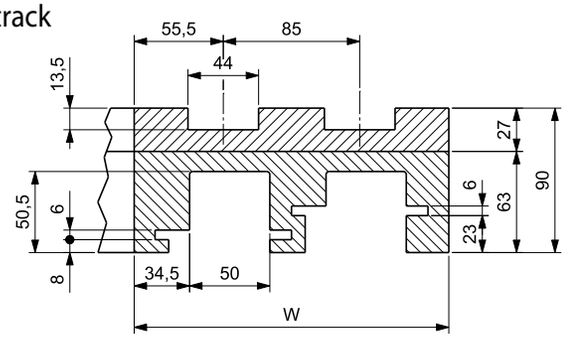

Radius

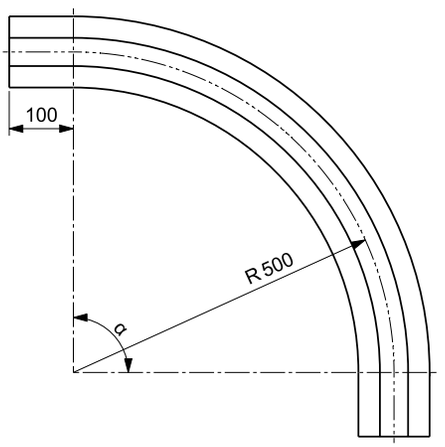

Return guide shoe

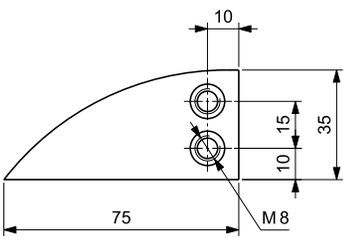

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02AAY/311	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02AAY/311

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	111	**MF01AFY/301**	**MF01AEY/301**	**MF01ACY/301**	**MF01ABY/301**	**MF01ALY/301**	**MF01AAY/301**
2	196	**MF02AFY/311**	**MF02AEY/311**	**MF02ACY/311**	**MF02ABY/311**	**MF02ALY/311**	**MF02AAY/311**
3	281	**MF03AFY/311**	**MF03AEY/311**	**MF03ACY/311**	**MF03ABY/311**	**MF03ALY/311**	**MF03AAY/311**
4	366	**MF04AFY/311**	**MF04AEY/311**	**MF04ACY/311**	**MF04ABY/311**	**MF04ALY/311**	**MF04AAY/311**
5	451	**MF05AFY/311**	**MF05AEY/311**	**MF05ACY/311**	**MF05ABY/311**	**MF05ALY/311**	**MF05AAY/311**
6	536	**MF06AFY/311**	**MF06AEY/311**	**MF06ACY/311**	**MF06ABY/311**	**MF06ALY/311**	**MF06AAY/311**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 04


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	89	125




Single track

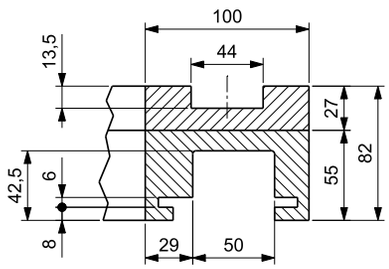


Multi track

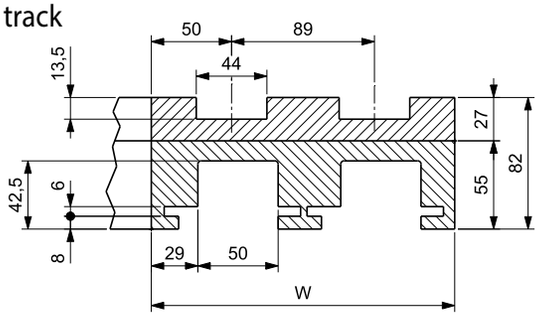

Radius

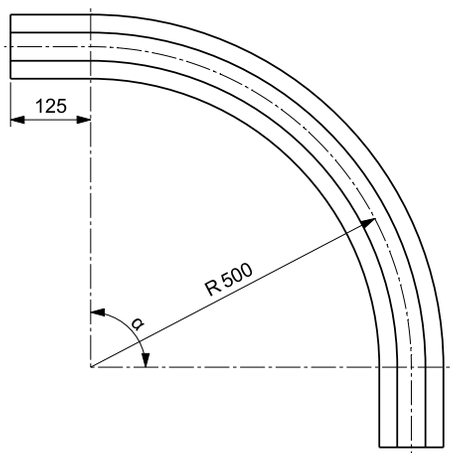

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02AAX/122	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02AAX/122

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	100	**MF01AFX/102**	**MF01AEX/102**	**MF01ACX/102**	**MF01ABX/102**	**MF01ALX/102**	**MF01AAX/102**
2	189	**MF02AFX/122**	**MF02AEX/122**	**MF02ACX/122**	**MF02ABX/122**	**MF02ALX/122**	**MF02AAX/122**
3	278	**MF03AFX/122**	**MF03AEX/122**	**MF03ACX/122**	**MF03ABX/122**	**MF03ALX/122**	**MF03AAX/122**
4	367	**MF04AFX/122**	**MF04AEX/122**	**MF04ACX/122**	**MF04ABX/122**	**MF04ALX/122**	**MF04AAX/122**
5	456	**MF05AFX/122**	**MF05AEX/122**	**MF05ACX/122**	**MF05ABX/122**	**MF05ALX/122**	**MF05AAX/122**
6	545	**MF06AFX/122**	**MF06AEX/122**	**MF06ACX/122**	**MF06ABX/122**	**MF06ALX/122**	**MF06AAX/122**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 05


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
680	100	Single track	100




Single track

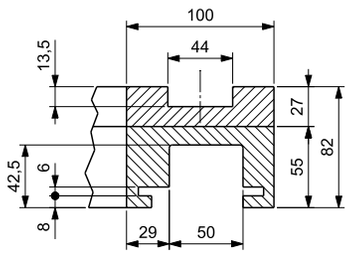

Radius

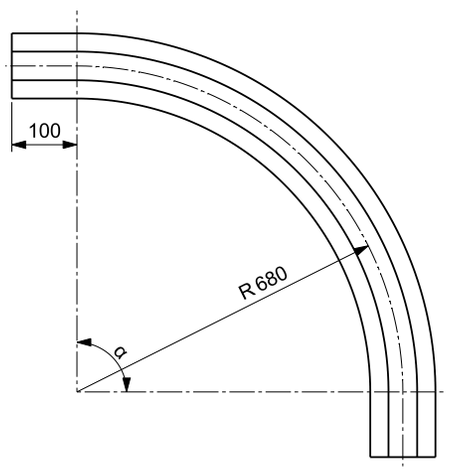

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION			
CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 1 track, 90° curve angle, P/N: MFE01DAX/101	Replace "MF" with "MFP" Example: 1 track, 90° curve angle, P/N: MFP01DAX/101

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MF01DFX/101**	**MF01DEX/101**	**MF01DCX/101**	**MF01DBX/101**	**MF01DLX/101**	**MF01DAX/101**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 06


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
750	100	85	100




Single track

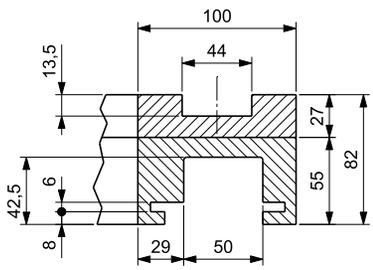


Multi track

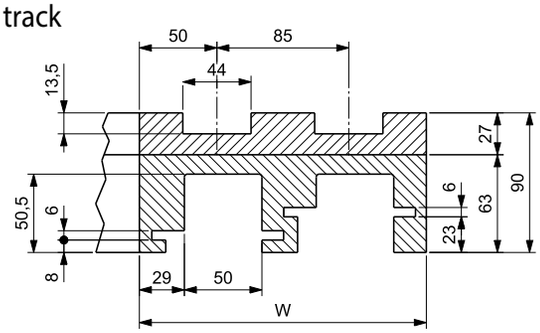

Radius

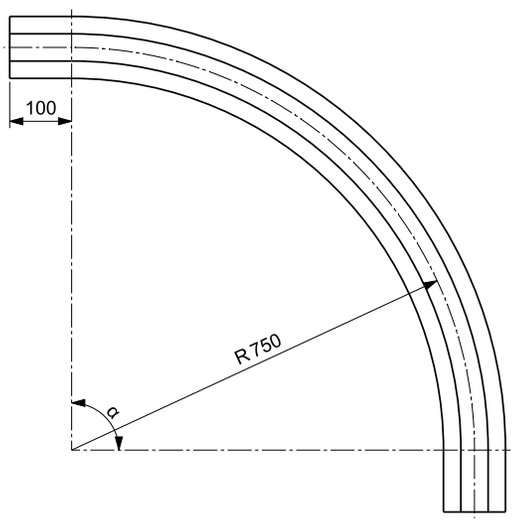

Return guide shoe

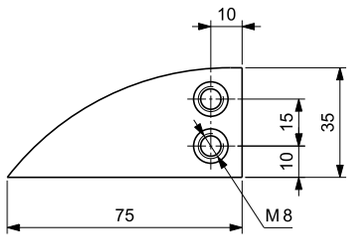

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02EAY/111	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02EAY/111

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MF01EFX/101**	**MF01EEX/101**	**MF01ECX/101**	**MF01EBX/101**	**MF01ELX/101**	**MF01EAX/101**
2	185	**MF02EFY/111**	**MF02EEY/111**	**MF02ECY/111**	**MF02EBY/111**	**MF02ELY/111**	**MF02EAY/111**
3	270	**MF03EFY/111**	**MF03EEY/111**	**MF03ECY/111**	**MF03EBY/111**	**MF03ELY/111**	**MF03EAY/111**
4	355	**MF04EFY/111**	**MF04EEY/111**	**MF04ECY/111**	**MF04EBY/111**	**MF04ELY/111**	**MF04EAY/111**
5	440	**MF05EFY/111**	**MF05EEY/111**	**MF05ECY/111**	**MF05EBY/111**	**MF05ELY/111**	**MF05EAY/111**
6	525	**MF06EFY/111**	**MF06EEY/111**	**MF06ECY/111**	**MF06EBY/111**	**MF06ELY/111**	**MF06EAY/111**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 07


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
750	111	85	100




Single track

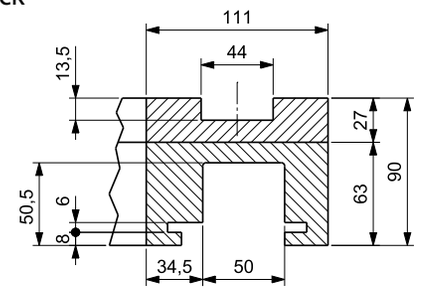


Multi track

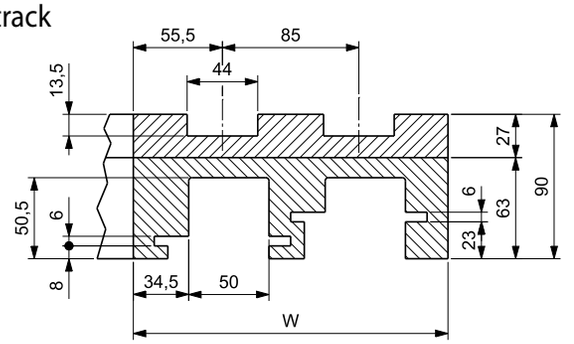

Radius

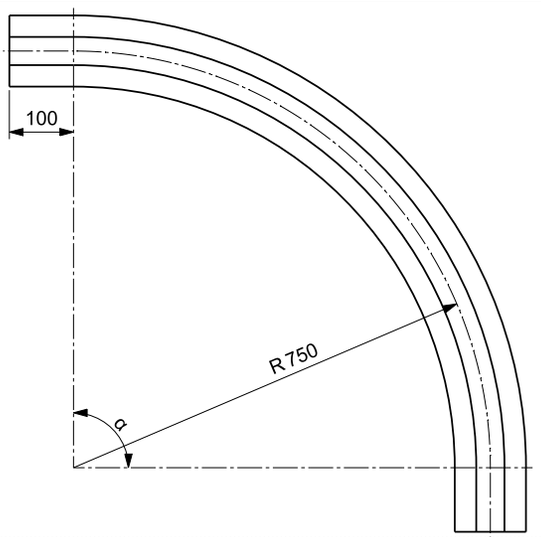

Return guide shoe

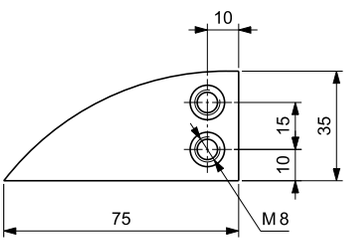

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02EAY/311	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02EAY/311

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	111	**MF01EFY/301**	**MF01EEY/301**	**MF01ECY/301**	**MF01EBY/301**	**MF01ELY/301**	**MF01EAY/301**
2	196	**MF02EFY/311**	**MF02EEY/311**	**MF02ECY/311**	**MF02EBY/311**	**MF02ELY/311**	**MF02EAY/311**
3	281	**MF03EFY/311**	**MF03EEY/311**	**MF03ECY/311**	**MF03EBY/311**	**MF03ELY/311**	**MF03EAY/311**
4	366	**MF04EFY/311**	**MF04EEY/311**	**MF04ECY/311**	**MF04EBY/311**	**MF04ELY/311**	**MF04EAY/311**
5	451	**MF05EFY/311**	**MF05EEY/311**	**MF05ECY/311**	**MF05EBY/311**	**MF05ELY/311**	**MF05EAY/311**
6	536	**MF06EFY/311**	**MF06EEY/311**	**MF06ECY/311**	**MF06EBY/311**	**MF06ELY/311**	**MF06EAY/311**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 08


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	100	Single track	125




Single track

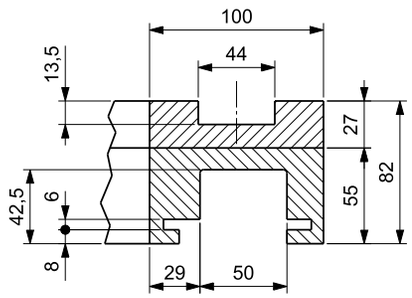

Radius

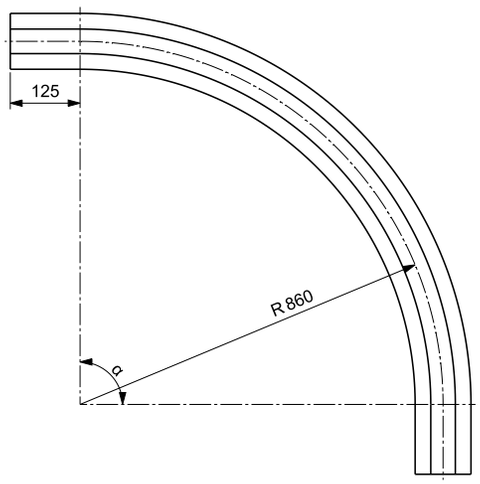

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 1 track, 90° curve angle, P/N: MFE01FAX/102	Replace "MF" with "MFP" Example: 1 track, 90° curve angle, P/N: MFP01FAX/102

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MF01FFX/102**	**MF01FEX/102**	**MF01FCX/102**	**MF01FBX/102**	**MF01FLX/102**	**MF01FAX/102**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 09


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
1000	100	Single track	-




Single track

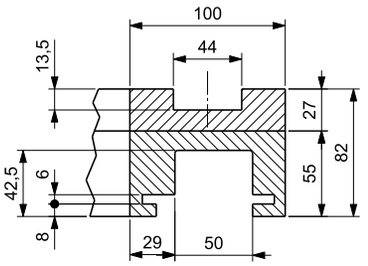

Radius

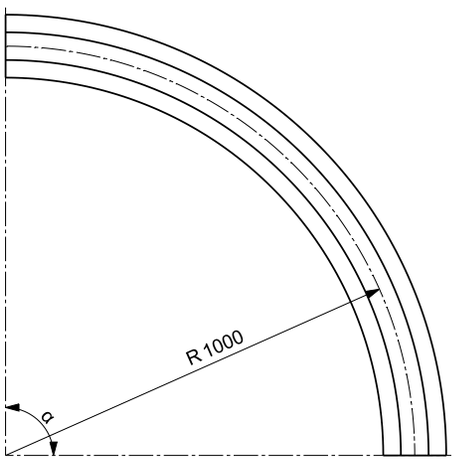

Return guide shoe

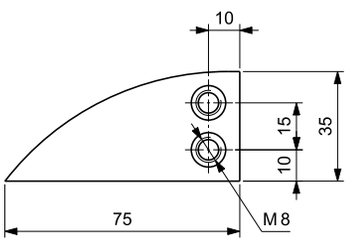

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 1 track,, 90° curve angle, P/N: MFE01GAX/102	Replace "MF" with "MFP" Example: 1 track, 90° curve angle, P/N: MFP01GAX/102

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MF01GFX/100**	**MF01GEX/100**	**MF01GCX/100**	**MF01GBX/100**	**MF01GLX/100**	**MF01GAX/100**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 10


SUITABLE FOR CHAINS:

- **981M K 3¼** (See page 40)
- **981M K 83,8** (See page 40)
- **PHD 981M K 3¼** (See page 40)
- **PHD 981M K 83,8** (See page 40)
- **PHDG 981M K 3¼** (See page 48)
- **880M RG K 3¼** (See page 59)
- **880M RG K 83,8** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
1000	111	85	100




Single track

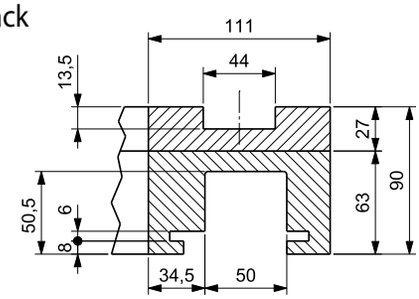


Multi track

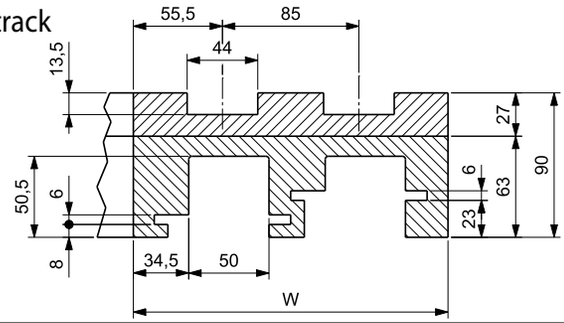

Radius

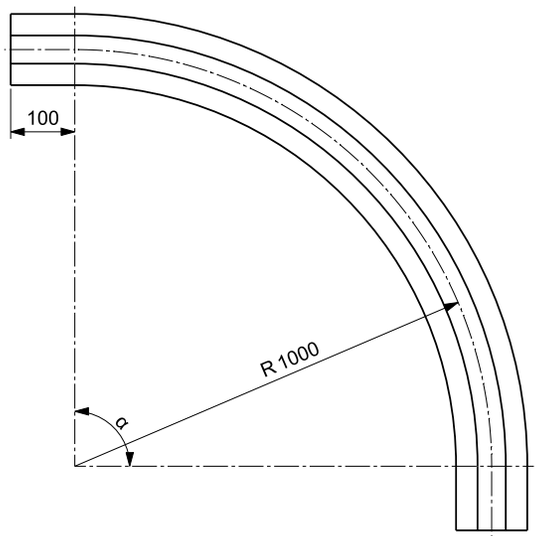

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02GAY/311	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02GAY/311

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	111	**MF01GFY/301**	**MF01GEY/301**	**MF01GCY/301**	**MF01GBY/301**	**MF01GLY/301**	**MF01GAY/301**
2	196	**MF02GFY/311**	**MF02GEY/311**	**MF02GCY/311**	**MF02GBY/311**	**MF02GLY/311**	**MF02GAY/311**
3	281	**MF03GFY/311**	**MF03GEY/311**	**MF03GCY/311**	**MF03GBY/311**	**MF03GLY/311**	**MF03GAY/311**
4	366	**MF04GFY/311**	**MF04GEY/311**	**MF04GCY/311**	**MF04GBY/311**	**MF04GLY/311**	**MF04GAY/311**
5	451	**MF05GFY/311**	**MF05GEY/311**	**MF05GCY/311**	**MF05GBY/311**	**MF05GLY/311**	**MF05GAY/311**
6	536	**MF06GFY/311**	**MF06GEY/311**	**MF06GCY/311**	**MF06GBY/311**	**MF06GLY/311**	**MF06GAY/311**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 11


SUITABLE FOR CHAINS:

- **981M K 4½** (See page 40)
- **PHD 981M K 4½** (See page 40)
- **880M RG K 4½** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	129	120	125




Single track

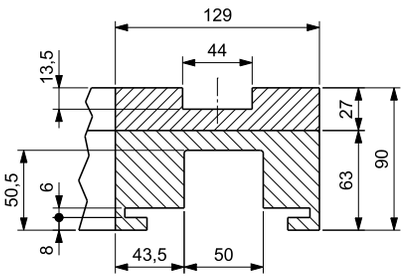


Multi track

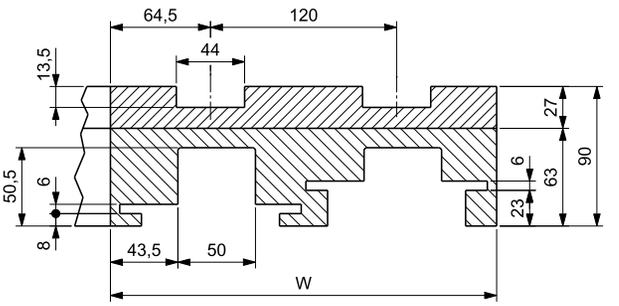

Radius

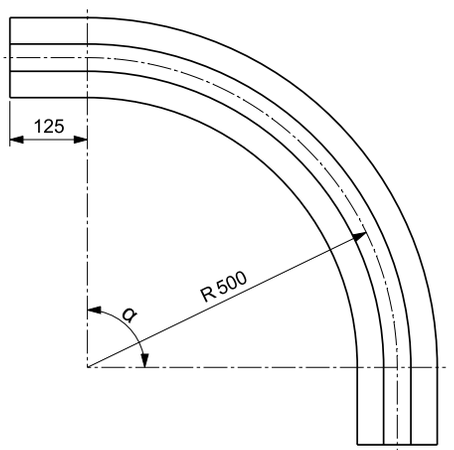

Return guide shoe

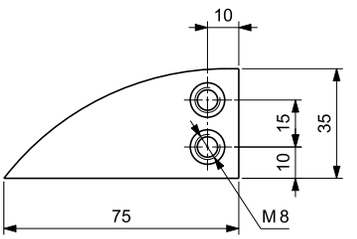

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02AAY/442	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02AAY/442

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	129	**MF01AFY/442**	**MF01AEY/442**	**MF01ACY/442**	**MF01ABY/442**	**MF01ALY/442**	**MF01AAY/442**
2	249	**MF02AFY/442**	**MF02AEY/442**	**MF02ACY/442**	**MF02ABY/442**	**MF02ALY/442**	**MF02AAY/442**
3	369	**MF03AFY/442**	**MF03AEY/442**	**MF03ACY/442**	**MF03ABY/442**	**MF03ALY/442**	**MF03AAY/442**
4	489	**MF04AFY/442**	**MF04AEY/442**	**MF04ACY/442**	**MF04ABY/442**	**MF04ALY/442**	**MF04AAY/442**
5	609	**MF05AFY/442**	**MF05AEY/442**	**MF05ACY/442**	**MF05ABY/442**	**MF05ALY/442**	**MF05AAY/442**
6	729	**MF06AFY/442**	**MF06AEY/442**	**MF06ACY/442**	**MF06ABY/442**	**MF06ALY/442**	**MF06AAY/442**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 12


SUITABLE FOR CHAINS:

- **981M K 4½** (See page 40)
- **PHD 981M K 4½** (See page 40)
- **880M RG K 4½** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
610	129	120	125




Single track

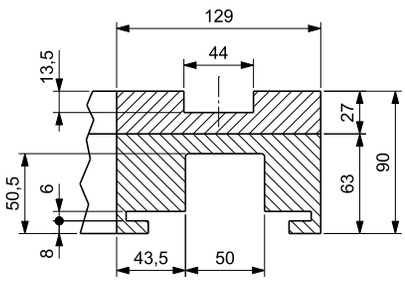


Multi track

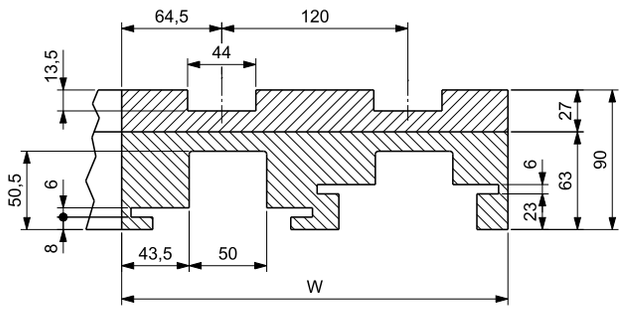

Radius

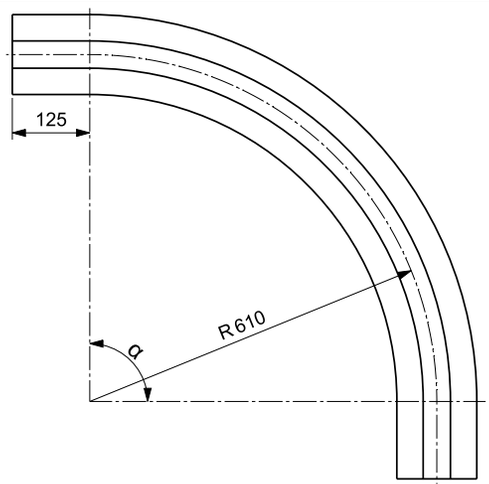

Return guide shoe

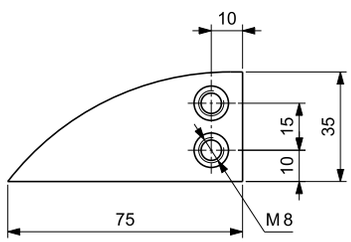

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02CAY/442	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02CAY/442

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	129	**MF01CFY/402**	**MF01CEY/402**	**MF01CCY/402**	**MF01CBY/402**	**MF01CLY/402**	**MF01CAY/402**
2	249	**MF02CFY/442**	**MF02CEY/442**	**MF02CCY/442**	**MF02CBY/442**	**MF02CLY/442**	**MF02CAY/442**
3	369	**MF03CFY/442**	**MF03CEY/442**	**MF03CCY/442**	**MF03CBY/442**	**MF03CLY/442**	**MF03CAY/442**
4	489	**MF04CFY/442**	**MF04CEY/442**	**MF04CCY/442**	**MF04CBY/442**	**MF04CLY/442**	**MF04CAY/442**
5	609	**MF05CFY/442**	**MF05CEY/442**	**MF05CCY/442**	**MF05CBY/442**	**MF05CLY/442**	**MF05CAY/442**
6	729	**MF06CFY/442**	**MF06CEY/442**	**MF06CCY/442**	**MF06CBY/442**	**MF06CLY/442**	**MF06CAY/442**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 13


SUITABLE FOR CHAINS:

- **981M K 4½** (See page 40)
- **PHD 981M K 4½** (See page 40)
- **880M RG K 4½** (See page 59)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
610	129	117	-




Single track

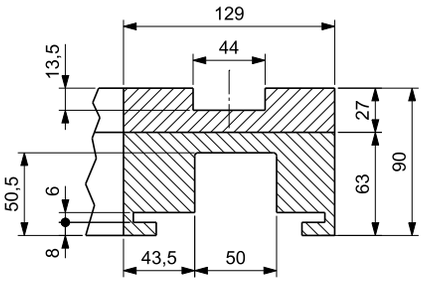


Multi track

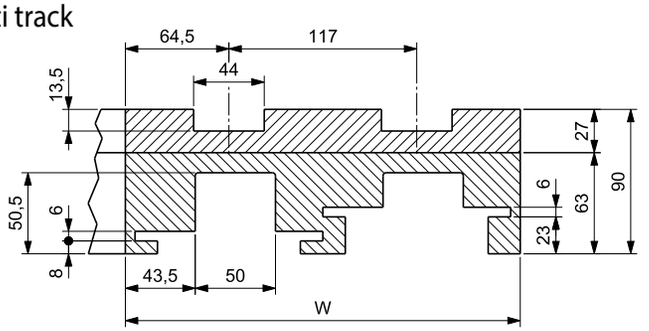

Radius

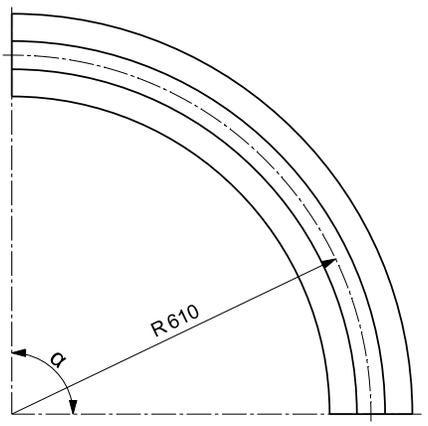

Return guide shoe

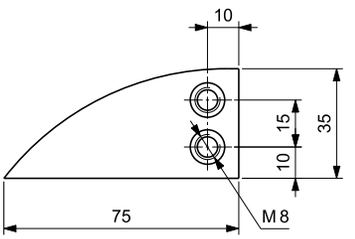

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02CAY/450	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02CAY/450

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	129	**MF01CFY/400**	**MF01CEY/400**	**MF01CCY/400**	**MF01CBY/400**	**MF01CLY/400**	**MF01CAY/400**
2	246	**MF02CFY/450**	**MF02CEY/450**	**MF02CCY/450**	**MF02CBY/450**	**MF02CLY/450**	**MF02CAY/450**
3	363	**MF03CFY/450**	**MF03CEY/450**	**MF03CCY/450**	**MF03CBY/450**	**MF03CLY/450**	**MF03CAY/450**
4	480	**MF04CFY/450**	**MF04CEY/450**	**MF04CCY/450**	**MF04CBY/450**	**MF04CLY/450**	**MF04CAY/450**
5	597	**MF05CFY/450**	**MF05CEY/450**	**MF05CCY/450**	**MF05CBY/450**	**MF05CLY/450**	**MF05CAY/450**
6	714	**MF06CFY/450**	**MF06CEY/450**	**MF06CCY/450**	**MF06CBY/450**	**MF06CLY/450**	**MF06CAY/450**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 14


SUITABLE FOR CHAINS:

- **981M K 7½** (See page 40)
- **PHD 981M K 7½** (See page 40)
- **PHDG 981M K 7½** (See page 48)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
610	214	196	125




Single track

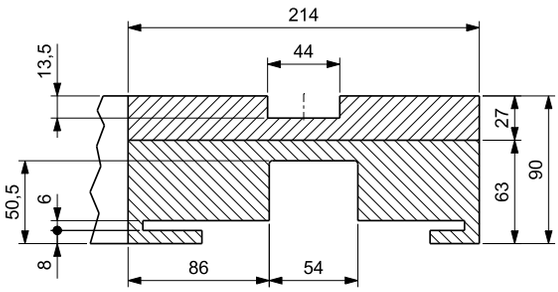


Multi track

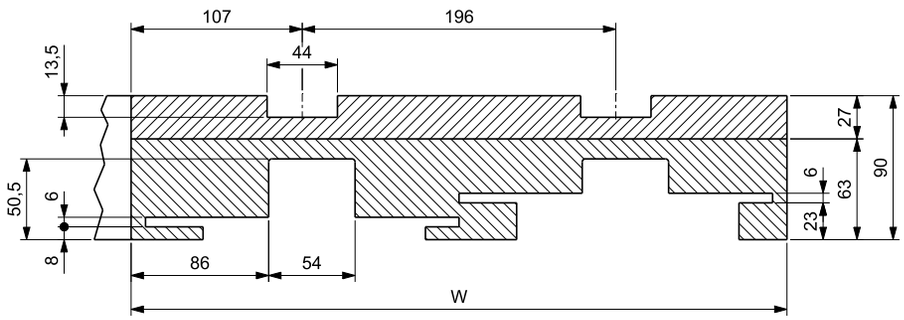

Radius

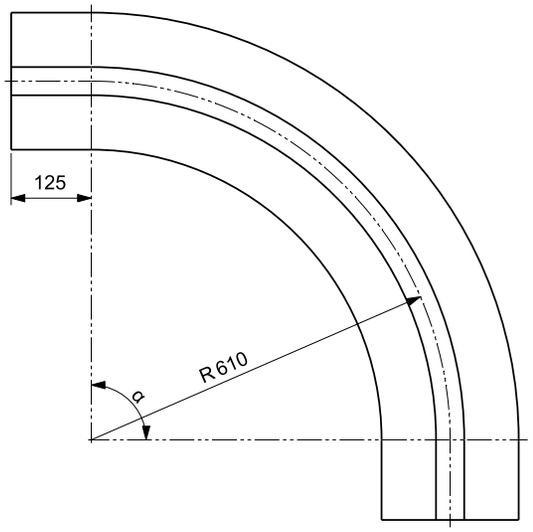

Return guide shoe

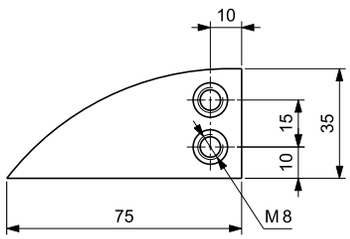

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 2 tracks, 90° curve angle, P/N: MFE02CAY/672	Replace "MF" with "MFP" Example: 2 tracks, 90° curve angle, P/N: MFP02CAY/672

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	214	**MF01CFY/602**	**MF01CEY/602**	**MF01CCY/602**	**MF01CBY/602**	**MF01CLY/602**	**MF01CAY/602**
2	410	**MF02CFY/672**	**MF02CEY/672**	**MF02CCY/672**	**MF02CBY/672**	**MF02CLY/672**	**MF02CAY/672**
3	606	**MF03CFY/672**	**MF03CEY/672**	**MF03CCY/672**	**MF03CBY/672**	**MF03CLY/672**	**MF03CAY/672**
4	802	**MF04CFY/672**	**MF04CEY/672**	**MF04CCY/672**	**MF04CBY/672**	**MF04CLY/672**	**MF04CAY/672**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 15


SUITABLE FOR CHAINS:

- **981M K 7½** (See page 40)
- **PHD 981M K 7½** (See page 40)
- **PHDG 981M K 7½** (See page 48)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	214	Single track	-

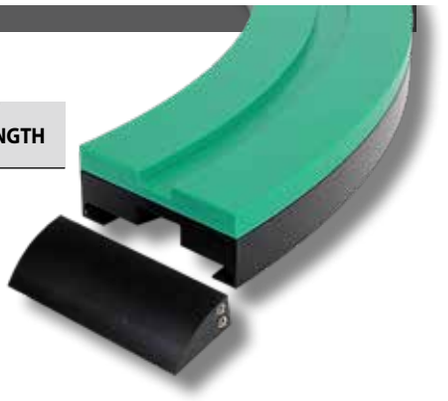


Single track

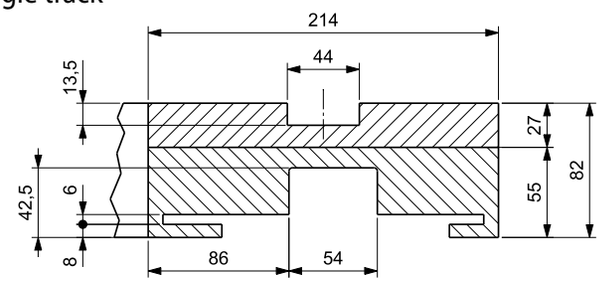

Radius

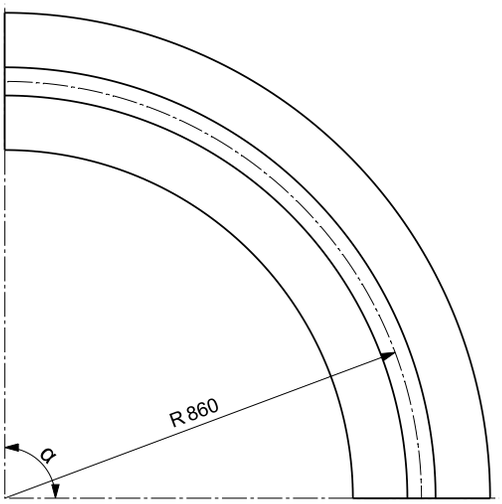

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 1 track, 90° curve angle, P/N: MFE01FAX/600	Replace "MF" with "MFP" Example: 1 track, 90° curve angle, P/N: MFP01FAX/600

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	214	**MF01FFX/600**	**MF01FEX/600**	**MF01FCX/600**	**MF01FBX/600**	**MF01FLX/600**	**MF01FAX/600**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION F 16


SUITABLE FOR CHAINS:

- **981M K 7½** (See page 40)
- **PHD 981M K 7½** (See page 40)
- **PHDG 981M K 7½** (See page 48)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
1000	214	Single track	-

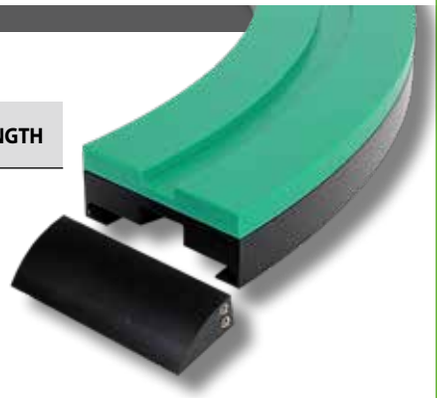


Single track

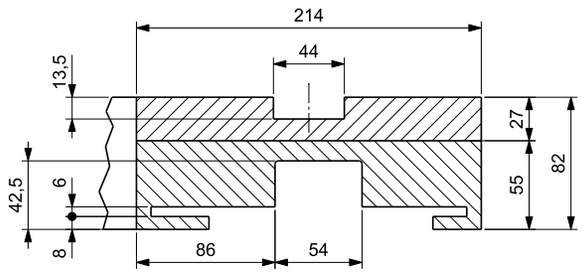

Radius

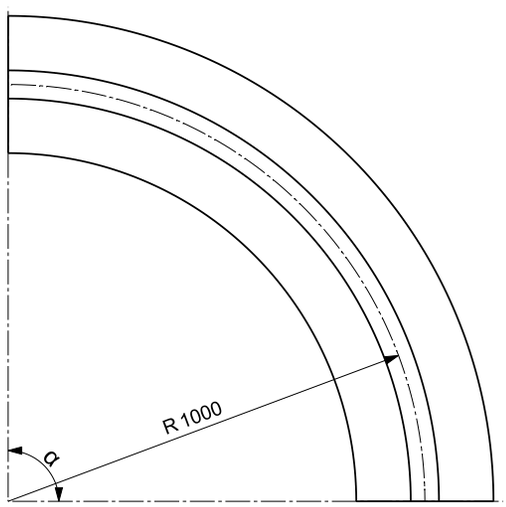

Return guide shoe

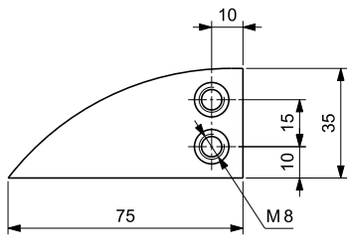

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MF" with "MFE" Example: 1 track, 90° curve angle, P/N: MFE01GAX/600	Replace "MF" with "MFP" Example: 1 track, 90° curve angle, P/N: MFP01GAX/600

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	214	**MF01GFX/600**	**MF01GEX/600**	**MF01GCX/600**	**MF01GBX/600**	**MF01GLX/600**	**MF01GAX/600**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION H 01


SUITABLE FOR CHAINS:

- **PHD 9857M K 7½** (See page 41)
- **PHDG 9857M K 7½** (See page 49)
- **882M K 7½** (See page 64)
- **HFX 882M K 7½** (See page 73)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
610	200	195	100




Single track

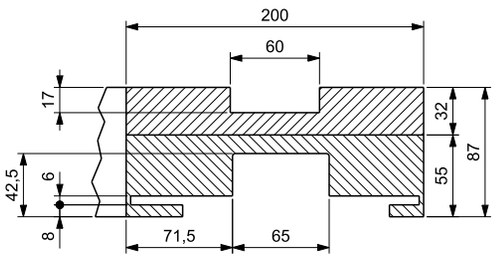


Multi track

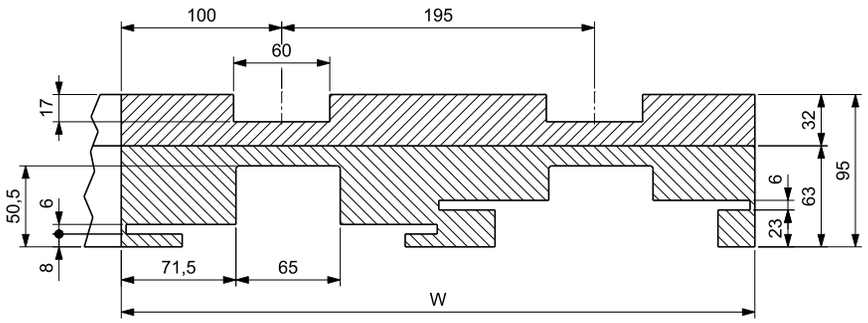

Radius

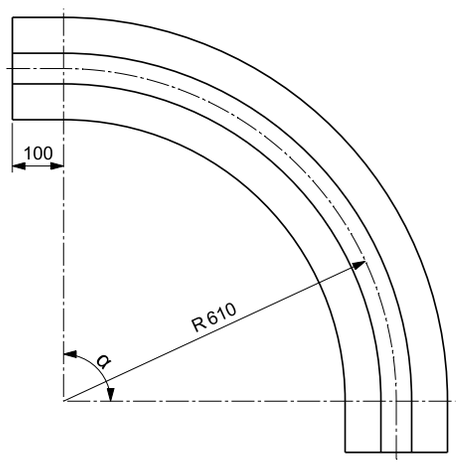

Return guide shoe

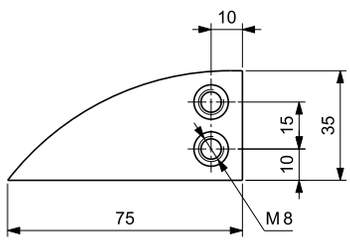

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MH" with "MHE" Example: 2 tracks, 90° curve angle, P/N: MHE02CAZ/561	Replace "MH" with "MHP" Example: 2 tracks, 90° curve angle, P/N: MHP02CAZ/561

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	200	**MH01CFW/501**	**MH01CEW/501**	**MH01CCW/501**	**MH01CBW/501**	**MH01CLW/501**	**MH01CAW/501**
2	395	**MH02CFZ/561**	**MH02CEZ/561**	**MH02CCZ/561**	**MH02CBZ/561**	**MH02CLZ/561**	**MH02CAZ/561**
3	590	**MH03CFZ/561**	**MH03CEZ/561**	**MH03CCZ/561**	**MH03CBZ/561**	**MH03CLZ/561**	**MH03CAZ/561**
4	785	**MH04CFZ/561**	**MH04CEZ/561**	**MH04CCZ/561**	**MH04CBZ/561**	**MH04CLZ/561**	**MH04CAZ/561**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION H 02


SUITABLE FOR CHAINS:

- **PHD 9857M K 7½** (See page 41)
- **PHDG 9857M K 7½** (See page 49)
- **882M K 7½** (See page 64)
- **HFX 882M K 7½** (See page 73)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
750	200	195	100




Single track

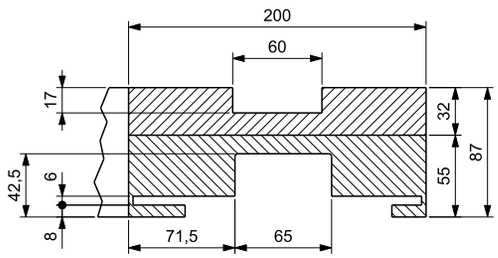


Multi track

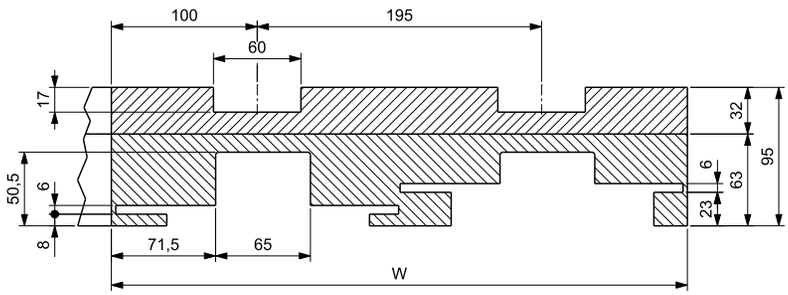

Radius

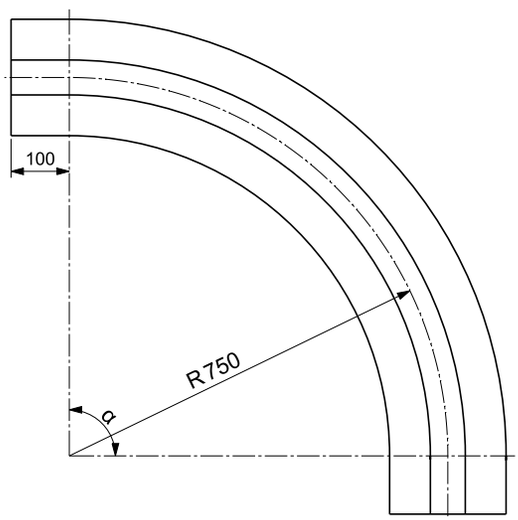

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION			
CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MH" with "MHE" Example: 2 tracks, 90° curve angle, P/N: MHE02EAZ/561	Replace "MH" with "MHP" Example: 2 tracks, 90° curve angle, P/N: MHP02EAZ/561

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	200	**MH01EFW/501**	**MH01EEW/501**	**MH01ECW/501**	**MH01EBW/501**	**MH01ELW/501**	**MH01EAW/501**
2	395	**MH02EFZ/561**	**MH02EEZ/561**	**MH02ECZ/561**	**MH02EBZ/561**	**MH02ELZ/561**	**MH02EAZ/561**
3	590	**MH03EFZ/561**	**MH03EEZ/561**	**MH03ECZ/561**	**MH03EBZ/561**	**MH03ELZ/561**	**MH03EAZ/561**
4	785	**MH04EFZ/561**	**MH04EEZ/561**	**MH04ECZ/561**	**MH04EBZ/561**	**MH04ELZ/561**	**MH04EAZ/561**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION H 03


SUITABLE FOR CHAINS:

- **PHD 9857M K 7½** (See page 41)
- **PHDG 9857M K 7½** (See page 49)
- **882M K 7½** (See page 64)
- **HFX 882M K 7½** (See page 73)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	214	Single track	-

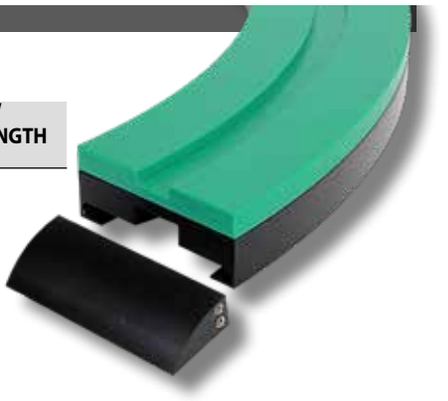


Single track

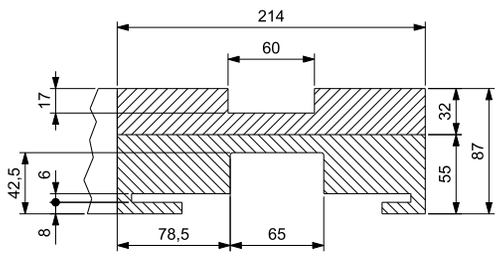

Radius

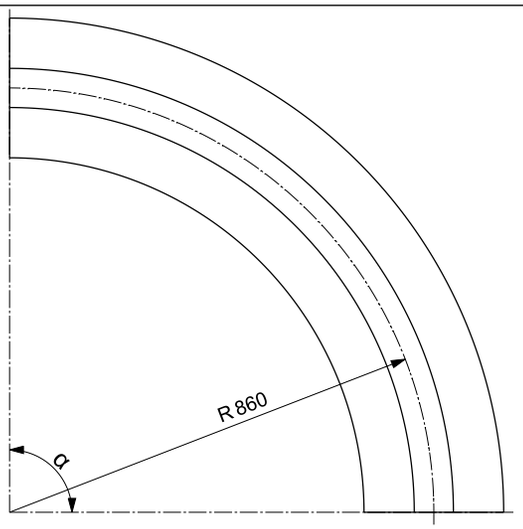

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MH" with "MHE" Example: 1 track, 90° curve angle, P/N: MHE01FAW/600	Replace "MH" with "MHP" Example: 1 track, 90° curve angle, P/N: MHP01FAW/600

PART NUMBER IDENTIFICATION

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	214	**MH01FFW/600**	**MH01FEW/600**	**MH01FCW/600**	**MH01FBW/600**	**MH01FLW/600**	**MH01FAW/600**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

VERSION H 04


SUITABLE FOR CHAINS:

- **PHD 9857M K 7½** (See page 41)
- **PHDG 9857M K 7½** (See page 49)
- **882M K 7½** (See page 64)
- **HFX 882M K 7½** (See page 73)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUFEED LENGTH mm
1000	214	Single track	-

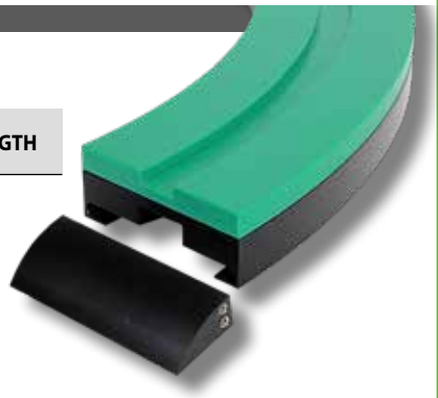


Single track

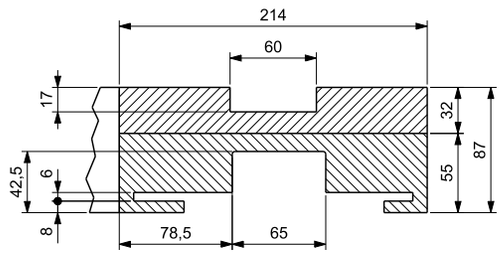

Radius

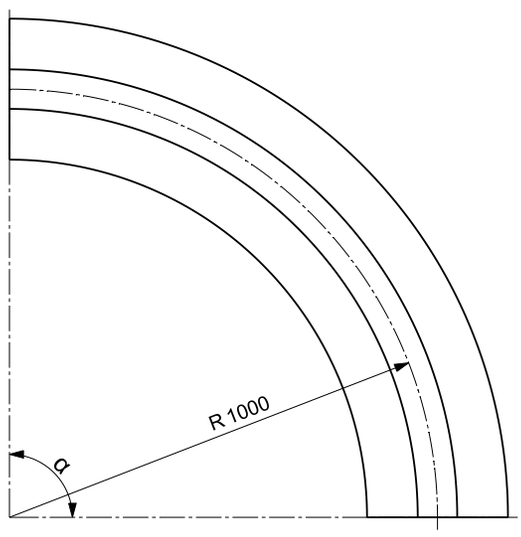

Return guide shoe

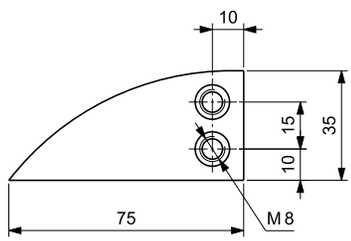

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MH" with "MHE" Example: 1 track, 90° curve angle, P/N: MHE01GAW/600	Replace "MH" with "MHP" Example: 1 track, 90° curve angle, P/N: MHP01GAW/600

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	214	**MH01GFW/600**	**MH01GEW/600**	**MH01GCW/600**	**MH01GBW/600**	**MH01GLW/600**	**MH01GAW/600**


NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION H 05

SUITABLE FOR CHAINS:
- **882M K 10** (See page 64)
- **HFX 882M K 10** (See page 73)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	290	Single track	-

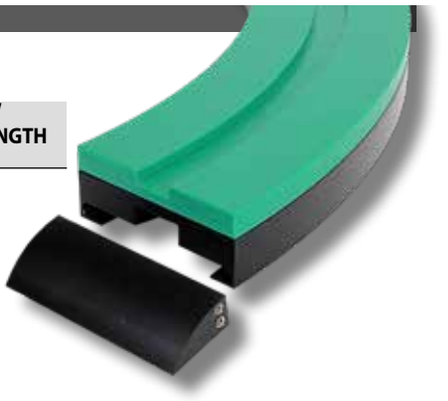


Single track

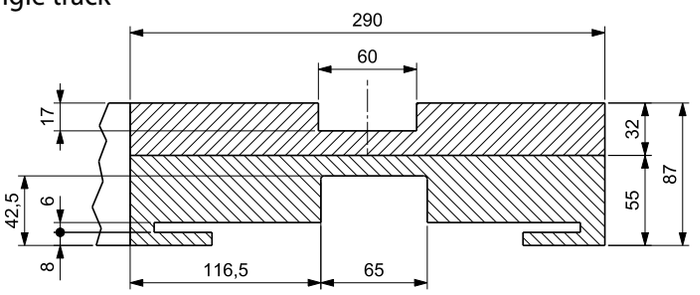

Radius

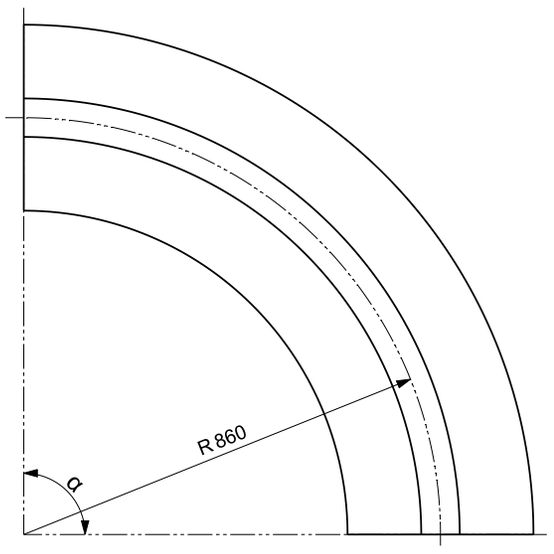

Return guide shoe

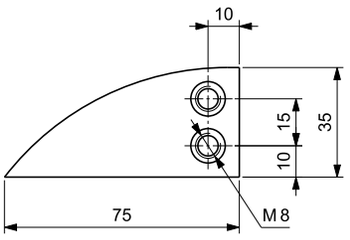

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MH" with "MHE" Example: 1 track, 90° curve angle, P/N: MHE01FAW/L00	Replace "MH" with "MHP" Example: 1 track, 90° curve angle, P/N: MHP01FAW/L00

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	290	**MH01FFW/L00**	**MH01FEW/L00**	**MH01FCW/L00**	**MH01FBW/L00**	**MH01FLW/L00**	**MH01FAW/L00**


NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION H 06

SUITABLE FOR CHAINS:
- **882M K 12** (See page 64)
- **HFX 882M K 12** (See page 73)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	340	Single track	-

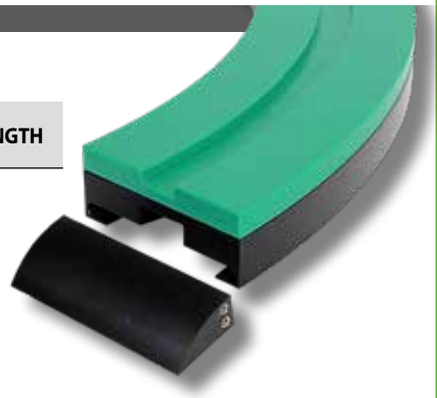


Single track

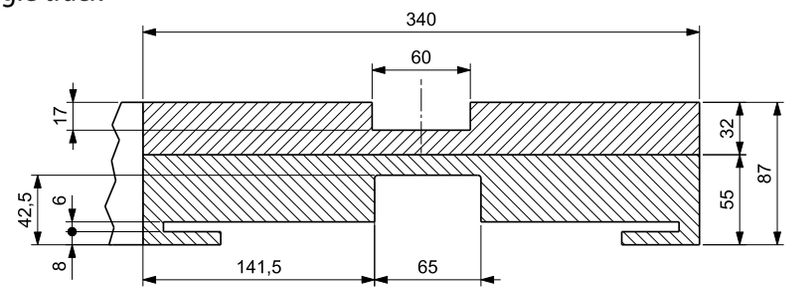

Radius

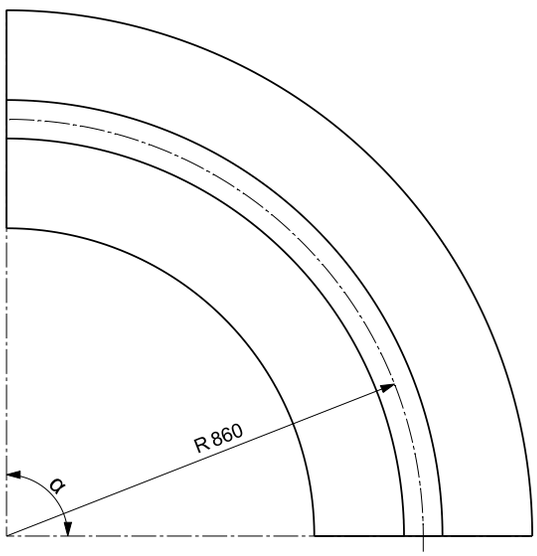

Return guide shoe

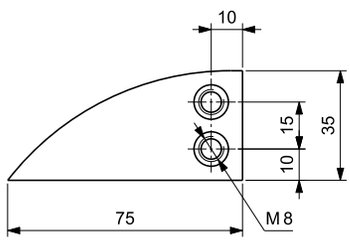

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MH" with "MHE" Example: 1 track, 90° curve angle, P/N: MHE01FAW/J00	Replace "MH" with "MHP" Example: 1 track, 90° curve angle, P/N: MHP01FAW/J00

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	340	**MH01FFW/J00**	**MH01FEW/J00**	**MH01FCW/J00**	**MH01FBW/J00**	**MH01FLW/J00**	**MH01FAW/J00**


NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION L 01

SUITABLE FOR CHAINS:
- LBP 882M K 7½ (See page 110)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	214	Single track	-

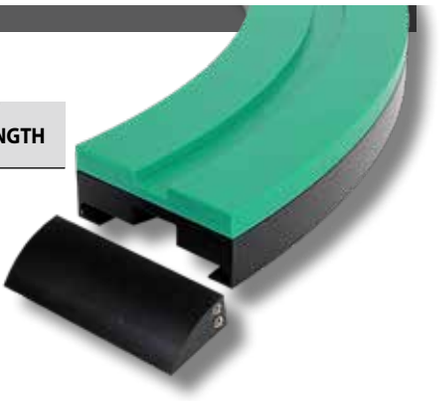


Single track

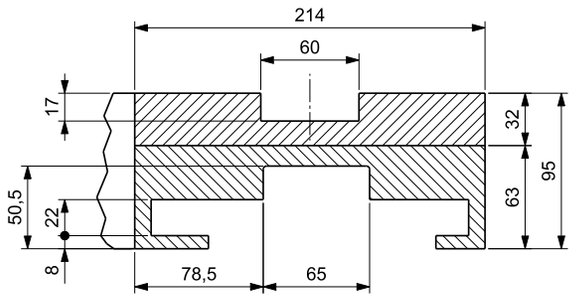

Radius

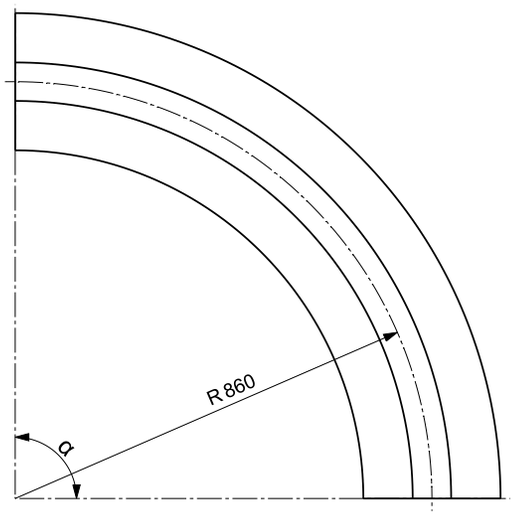

Return guide shoe

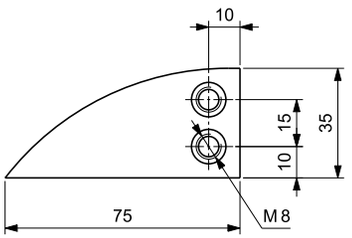

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "ML" with "MLE" Example: 1 track, 90° curve angle, P/N: MLE01FAZ/600	Replace "ML" with "MLP" Example: 1 track, 90° curve angle, P/N: MLP01FAZ/600

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	214	**ML01FFZ/600**	**ML01FEZ/600**	**ML01FCZ/600**	**ML01FBZ/600**	**ML01FLZ/600**	**ML01FAZ/600**


NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION L 02

SUITABLE FOR CHAINS:
- LBP 882M K 10 (See page 110)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	290	Single track	-

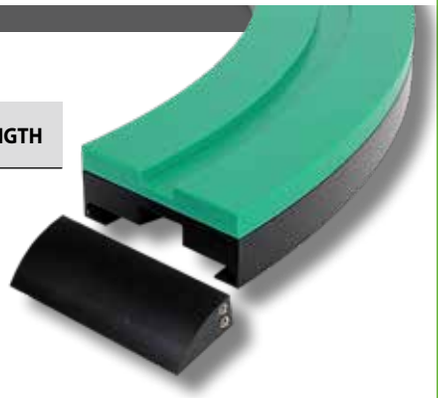


Single track

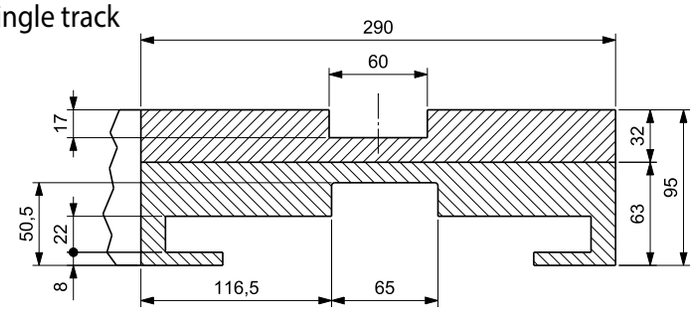

Radius

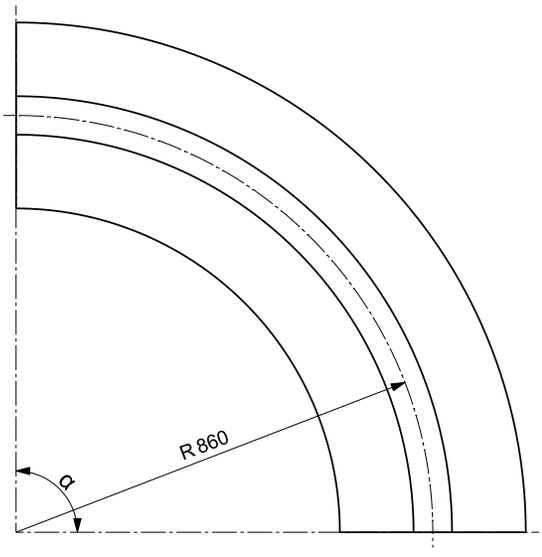

Return guide shoe

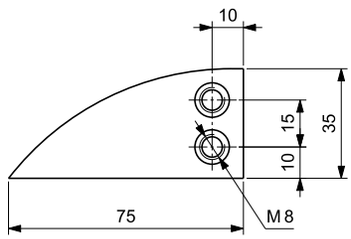

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "ML" with "MLE" Example: 1 track, 90° curve angle, P/N: MLE01FAZ/L00	Replace "ML" with "MLP" Example: 1 track, 90° curve angle, P/N: MLP01FAZ/L00

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	290	**ML01FFZ/L00**	**ML01FEZ/L00**	**ML01FCZ/L00**	**ML01FBZ/L00**	**ML01FLZ/L00**	**ML01FAZ/L00**


NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION L 03

SUITABLE FOR CHAINS:
- LBP 882M K 12 (See page 110)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
860	340	Single track	-

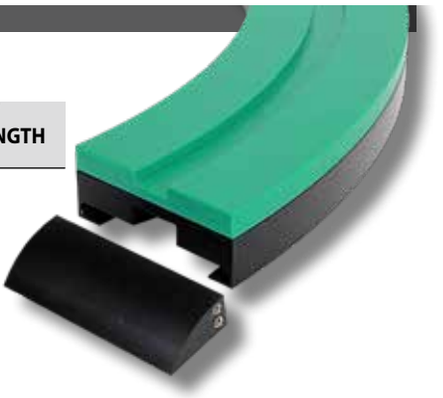


Single track

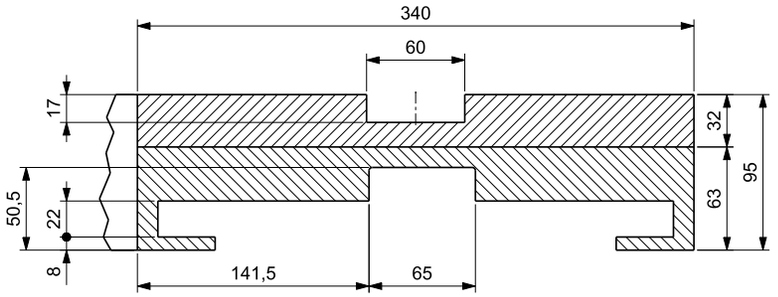

Radius

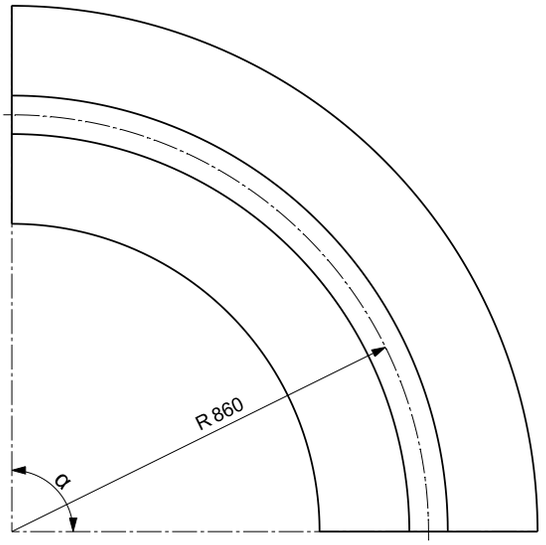

Return guide shoe

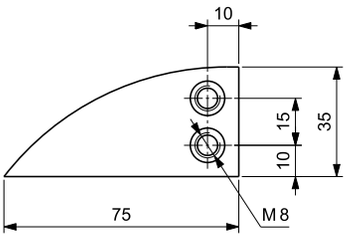

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "ML" with "MLE" Example: 1 track, 90° curve angle, P/N: MLE01FAZ/J00	Replace "ML" with "MLP" Example: 1 track, 90° curve angle, P/N: MLP01FAZ/J00

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	340	**ML01FFZ/J00**	**ML01FEZ/J00**	**ML01FCZ/J00**	**ML01FBZ/J00**	**ML01FLZ/J00**	**ML01FAZ/J00**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION S 01

SUITABLE FOR CHAINS:
- 650M K 83,8 (See page 189)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	-




Single track

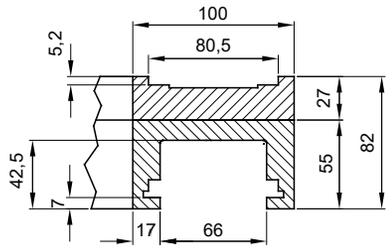


Multi track

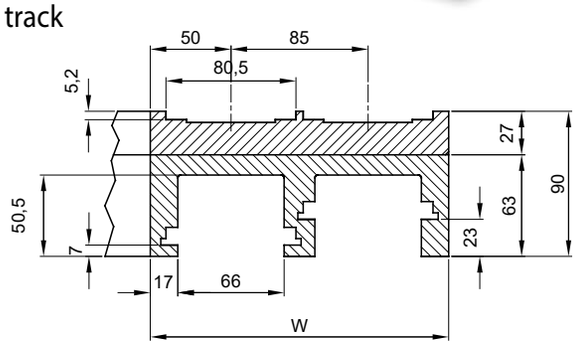

Radius

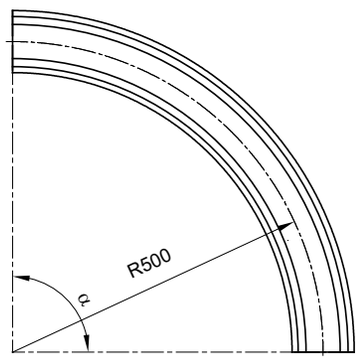

Return guide shoe

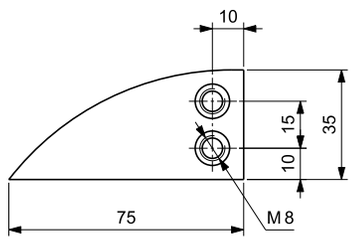

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MS" with "MSE" Example: 2 tracks, 90° curve angle, P/N: MSE02AAY/110	Replace "MS" with "MSP" Example: 2 tracks, 90° curve angle, P/N: MSP02AAY/110

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	100	**MS01AFX/100**	**MS01AEX/100**	**MS01ACX/100**	**MS01ABX/100**	**MS01ALX/100**	**MS01AAX/100**
2	185	**MS02AFY/110**	**MS02AEY/110**	**MS02ACY/110**	**MS02ABY/110**	**MS02ALY/110**	**MS02AAY/110**
3	270	**MS03AFY/110**	**MS03AEY/110**	**MS03ACY/110**	**MS03ABY/110**	**MS03ALY/110**	**MS03AAY/110**
4	355	**MS04AFY/110**	**MS04AEY/110**	**MS04ACY/110**	**MS04ABY/110**	**MS04ALY/110**	**MS04AAY/110**
5	440	**MS05AFY/110**	**MS05AEY/110**	**MS05ACY/110**	**MS05ABY/110**	**MS05ALY/110**	**MS05AAY/110**
6	525	**MS06AFY/110**	**MS06AEY/110**	**MS06ACY/110**	**MS06ABY/110**	**MS06ALY/110**	**MS06AAY/110**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION M 01

SUITABLE FOR CHAINS:
- **782M K 83,8** (See page 257)
- **783M K 83,8** (See page 257)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	-




Single track

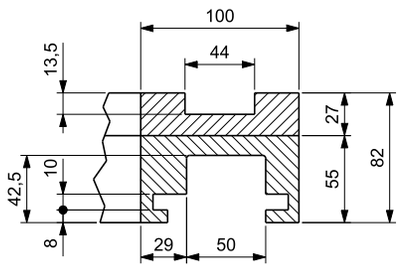


Multi track

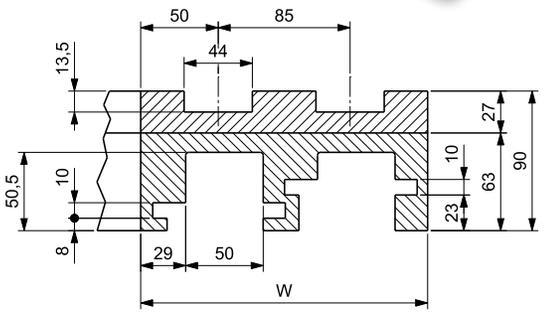

Radius

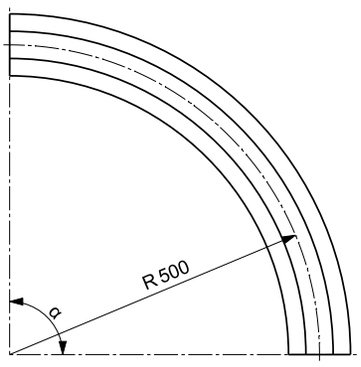

Return guide shoe

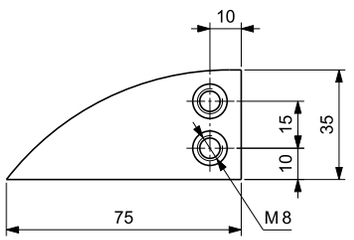

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION			
CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MM" with "MME" Example: 2 tracks, 90° curve angle, P/N: MME02AAY/110	Replace "MM" with "MMP" Example: 2 tracks, 90° curve angle, P/N: MMP02AAY/110

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MM01AFX/100**	**MM01AEX/100**	**MM01ACX/100**	**MM01ABX/100**	**MM01ALX/100**	**MM01AAX/100**
2	185	**MM02AFY/110**	**MM02AEY/110**	**MM02ACY/110**	**MM02ABY/110**	**MM02ALY/110**	**MM02AAY/110**
3	270	**MM03AFY/110**	**MM03AEY/110**	**MM03ACY/110**	**MM03ABY/110**	**MM03ALY/110**	**MM03AAY/110**
4	355	**MM04AFY/110**	**MM04AEY/110**	**MM04ACY/110**	**MM04ABY/110**	**MM04ALY/110**	**MM04AAY/110**
5	440	**MM05AFY/110**	**MM05AEY/110**	**MM05ACY/110**	**MM05ABY/110**	**MM05ALY/110**	**MM05AAY/110**
6	525	**MM06AFY/110**	**MM06AEY/110**	**MM06ACY/110**	**MM06ABY/110**	**MM06ALY/110**	**MM06AAY/110**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION M 02

SUITABLE FOR CHAINS:
- **782M K 83,8** (See page 257)
- **783M K 83,8** (See page 257)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	100




Single track

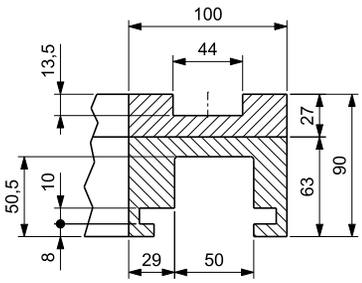


Multi track

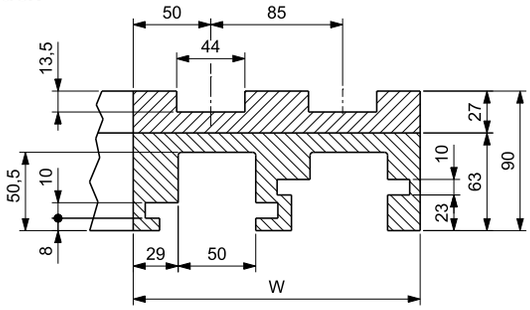

Radius

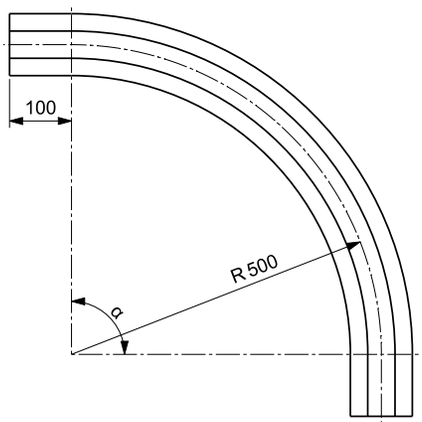

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MM" with "MME" Example: 2 tracks, 90° curve angle, P/N: MME02AAY/111	Replace "MM" with "MMP" Example: 2 tracks, 90° curve angle, P/N: MMP02AAY/111

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MM01AFY/101**	**MM01AEY/101**	**MM01ACY/101**	**MM01ABY/101**	**MM01ALY/101**	**MM01AAY/101**
2	185	**MM02AFY/111**	**MM02AEY/111**	**MM02ACY/111**	**MM02ABY/111**	**MM02ALY/111**	**MM02AAY/111**
3	270	**MM03AFY/111**	**MM03AEY/111**	**MM03ACY/111**	**MM03ABY/111**	**MM03ALY/111**	**MM03AAY/111**
4	355	**MM04AFY/111**	**MM04AEY/111**	**MM04ACY/111**	**MM04ABY/111**	**MM04ALY/111**	**MM04AAY/111**
5	440	**MM05AFY/111**	**MM05AEY/111**	**MM05ACY/111**	**MM05ABY/111**	**MM05ALY/111**	**MM05AAY/111**
6	525	**MM06AFY/111**	**MM06AEY/111**	**MM06ACY/111**	**MM06ABY/111**	**MM06ALY/111**	**MM06AAY/111**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION M 03

SUITABLE FOR CHAINS:
- **782M K 83,8** (See page 257)
- **783M K 83,8** (See page 257)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	111	85	100




Single track

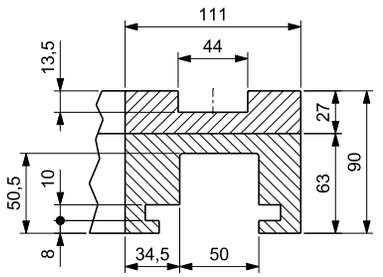


Multi track

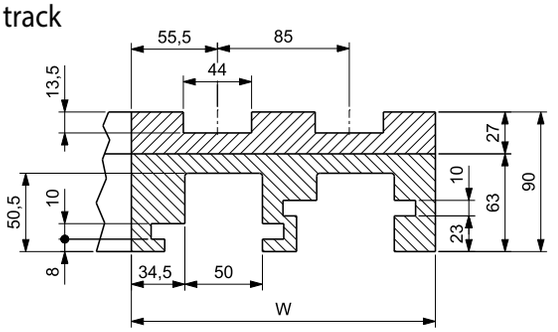

Radius

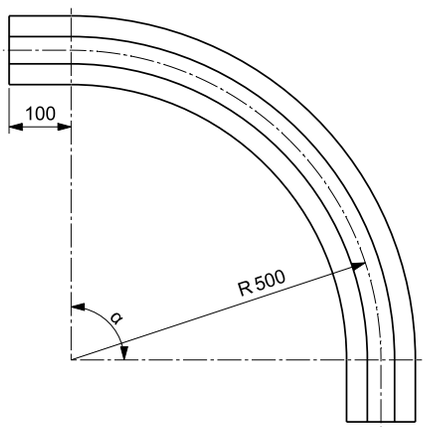

Return guide shoe

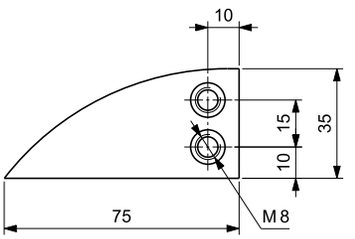

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION			
CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MM" with "MME" Example: 2 tracks, 90° curve angle, P/N: MME02AAY/311	Replace "MM" with "MMP" Example: 2 tracks, 90° curve angle, P/N: MMP02AAY/311

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	111	**MM01AFY/301**	**MM01AEY/301**	**MM01ACY/301**	**MM01ABY/301**	**MM01ALY/301**	**MM01AAY/301**
2	196	**MM02AFY/311**	**MM02AEY/311**	**MM02ACY/311**	**MM02ABY/311**	**MM02ALY/311**	**MM02AAY/311**
3	281	**MM03AFY/311**	**MM03AEY/311**	**MM03ACY/311**	**MM03ABY/311**	**MM03ALY/311**	**MM03AAY/311**
4	366	**MM04AFY/311**	**MM04AEY/311**	**MM04ACY/311**	**MM04ABY/311**	**MM04ALY/311**	**MM04AAY/311**
5	451	**MM05AFY/311**	**MM05AEY/311**	**MM05ACY/311**	**MM05ABY/311**	**MM05ALY/311**	**MM05AAY/311**
6	536	**MM06AFY/311**	**MM06AEY/311**	**MM06ACY/311**	**MM06ABY/311**	**MM06ALY/311**	**MM06AAY/311**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION M 04

SUITABLE FOR CHAINS:
- **782M K 83,8** (See page 257)
- **783M K 83,8** (See page 257)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
750	100	85	100




Single track

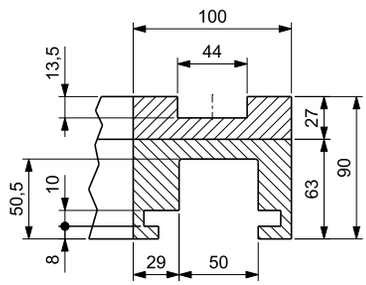


Multi track

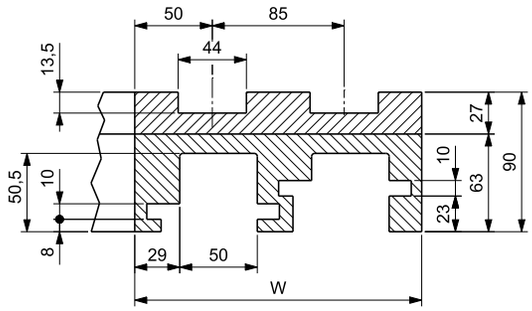

Radius

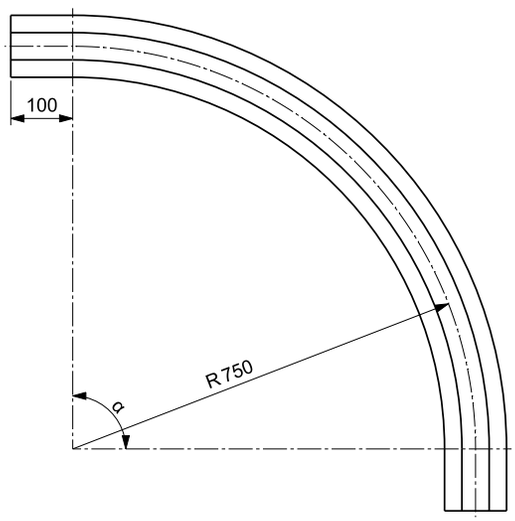

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION			
CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MM" with "MME" Example: 2 tracks, 90° curve angle, P/N: MME02EAY/111	Replace "MM" with "MMP" Example: 2 tracks, 90° curve angle, P/N: MMP02EAY/111

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	100	**MM01EFY/101**	**MM01EEY/101**	**MM01ECY/101**	**MM01EBY/101**	**MM01ELY/101**	**MM01EAY/101**
2	185	**MM02EFY/111**	**MM02EEY/111**	**MM02ECY/111**	**MM02EBY/111**	**MM02ELY/111**	**MM02EAY/111**
3	270	**MM03EFY/111**	**MM03EEY/111**	**MM03ECY/111**	**MM03EBY/111**	**MM03ELY/111**	**MM03EAY/111**
4	355	**MM04EFY/111**	**MM04EEY/111**	**MM04ECY/111**	**MM04EBY/111**	**MM04ELY/111**	**MM04EAY/111**
5	440	**MM05EFY/111**	**MM05EEY/111**	**MM05ECY/111**	**MM05EBY/111**	**MM05ELY/111**	**MM05EAY/111**
6	525	**MM06EFY/111**	**MM06EEY/111**	**MM06ECY/111**	**MM06EBY/111**	**MM06ELY/111**	**MM06EAY/111**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION M 05

SUITABLE FOR CHAINS:
- **782M K 83,8** (See page 257)
- **783M K 83,8** (See page 257)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
750	111	85	100




Single track

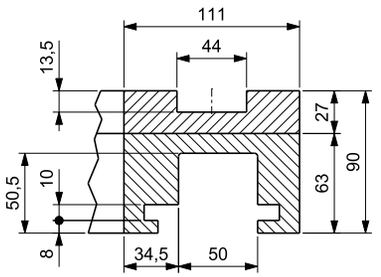


Multi track

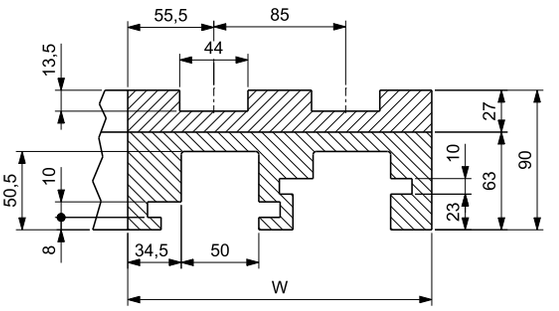

Radius

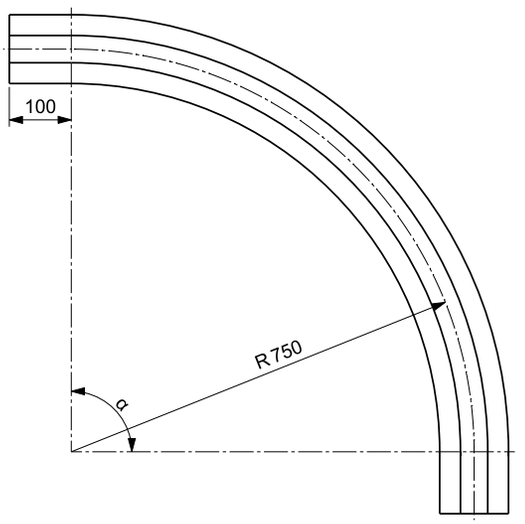

Return guide shoe

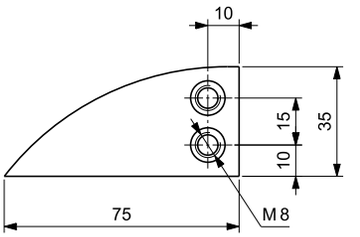

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MM" with "MME" Example: 2 tracks, 90° curve angle, P/N: MME02EAY/311	Replace "MM" with "MMP" Example: 2 tracks, 90° curve angle, P/N: MMP02EAY/311

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	111	**MM01EFY/301**	**MM01EEY/301**	**MM01ECY/301**	**MM01EBY/301**	**MM01ELY/301**	**MM01EAY/301**
2	196	**MM02EFY/311**	**MM02EEY/311**	**MM02ECY/311**	**MM02EBY/311**	**MM02ELY/311**	**MM02EAY/311**
3	281	**MM03EFY/311**	**MM03EEY/311**	**MM03ECY/311**	**MM03EBY/311**	**MM03ELY/311**	**MM03EAY/311**
4	366	**MM04EFY/311**	**MM04EEY/311**	**MM04ECY/311**	**MM04EBY/311**	**MM04ELY/311**	**MM04EAY/311**
5	451	**MM05EFY/311**	**MM05EEY/311**	**MM05ECY/311**	**MM05EBY/311**	**MM05ELY/311**	**MM05EAY/311**
6	536	**MM06EFY/311**	**MM06EEY/311**	**MM06ECY/311**	**MM06EBY/311**	**MM06ELY/311**	**MM06EAY/311**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION M 06

SUITABLE FOR CHAINS:
- **782M K 83,8** (See page 257)
- **783M K 83,8** (See page 257)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
1000	100	85	-




Single track

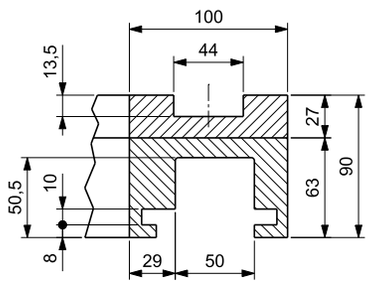


Multi track

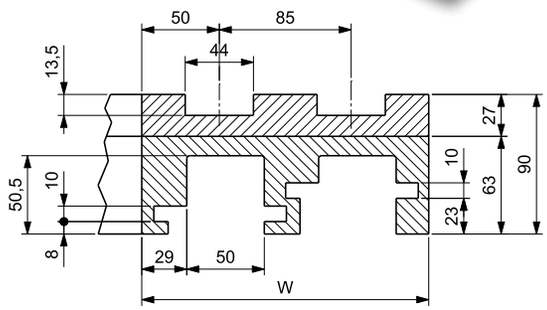

Radius

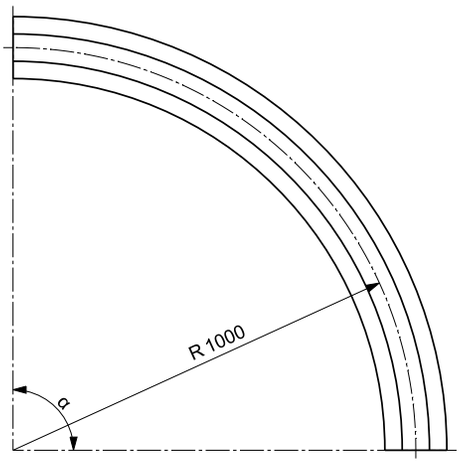

Return guide shoe

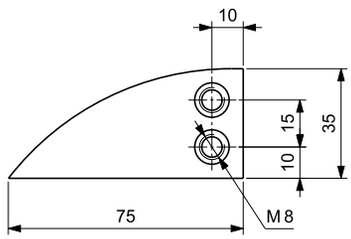

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MM" with "MME" Example: 2 tracks, 90° curve angle, P/N: MME02GAY/110	Replace "MM" with "MMP" Example: 2 tracks, 90° curve angle, P/N: MMP02GAY/110

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	100	**MM01GFY/100**	**MM01GEY/100**	**MM01GCY/100**	**MM01GBY/100**	**MM01GLY/100**	**MM01GAY/100**
2	185	**MM02GFY/110**	**MM02GEY/110**	**MM02GCY/110**	**MM02GBY/110**	**MM02GLY/110**	**MM02GAY/110**
3	270	**MM03GFY/110**	**MM03GEY/110**	**MM03GCY/110**	**MM03GBY/110**	**MM03GLY/110**	**MM03GAY/110**
4	355	**MM04GFY/110**	**MM04GEY/110**	**MM04GCY/110**	**MM04GBY/110**	**MM04GLY/110**	**MM04GAY/110**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION U 01

SUITABLE FOR CHAINS:
-793M K 83,8 (See page 259)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	-




Single track

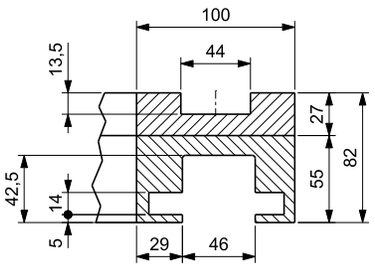


Multi track

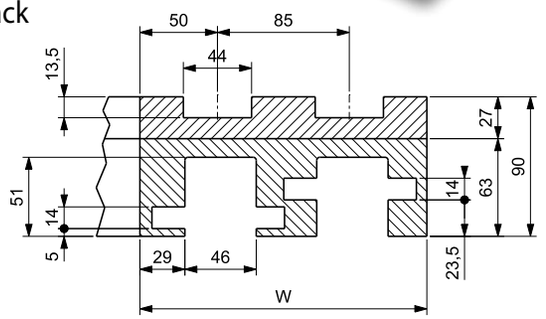

Radius

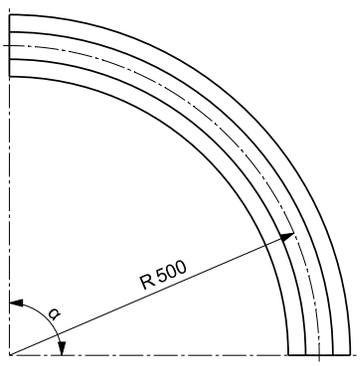

Return guide shoe

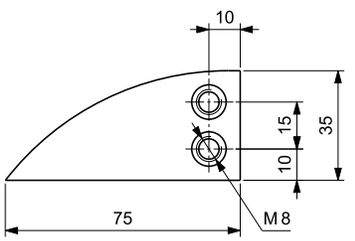

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MU" with "MUE" Example: 2 tracks, 90° curve angle, P/N: MUE02AAY/110	Replace "MU" with "MUP" Example: 2 tracks, 90° curve angle, P/N: MUP02AAY/110

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MU01AFX/100**	**MU01AEX/100**	**MU01ACX/100**	**MU01ABX/100**	**MU01ALX/100**	**MU01AAX/100**
2	185	**MU02AFY/110**	**MU02AEY/110**	**MU02ACY/110**	**MU02ABY/110**	**MU02ALY/110**	**MU02AAY/110**
3	270	**MU03AFY/110**	**MU03AEY/110**	**MU03ACY/110**	**MU03ABY/110**	**MU03ALY/110**	**MU03AAY/110**
4	355	**MU04AFY/110**	**MU04AEY/110**	**MU04ACY/110**	**MU04ABY/110**	**MU04ALY/110**	**MU04AAY/110**
5	440	**MU05AFY/110**	**MU05AEY/110**	**MU05ACY/110**	**MU05ABY/110**	**MU05ALY/110**	**MU05AAY/110**
6	525	**MU06AFY/110**	**MU06AEY/110**	**MU06ACY/110**	**MU06ABY/110**	**MU06ALY/110**	**MU06AAY/110**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION U 02

SUITABLE FOR CHAINS:
-793M K 83,8 (See page 259)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	100	85	100




Single track

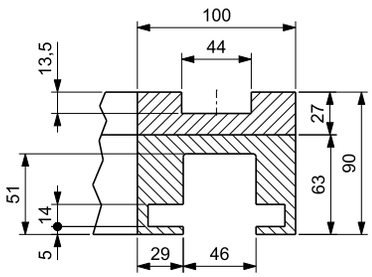


Multi track

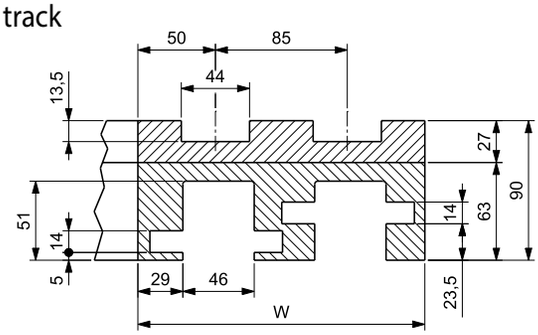

Radius

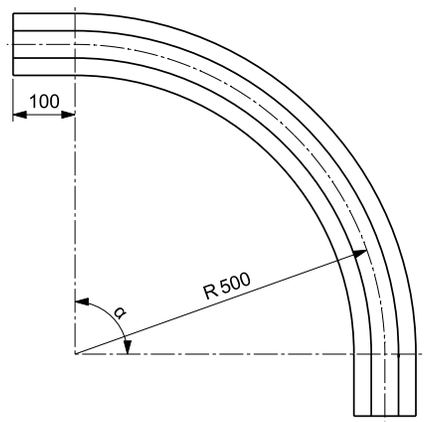

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MU" with "MUE" Example: 2 tracks, 90° curve angle, P/N: MUE02AAY/111	Replace "MU" with "MUP" Example: 2 tracks, 90° curve angle, P/N: MUP02AAY/111

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MU01AFY/101**	**MU01AEY/101**	**MU01ACY/101**	**MU01ABY/101**	**MU01ALY/101**	**MU01AAY/101**
2	185	**MU02AFY/111**	**MU02AEY/111**	**MU02ACY/111**	**MU02ABY/111**	**MU02ALY/111**	**MU02AAY/111**
3	270	**MU03AFY/111**	**MU03AEY/111**	**MU03ACY/111**	**MU03ABY/111**	**MU03ALY/111**	**MU03AAY/111**
4	355	**MU04AFY/111**	**MU04AEY/111**	**MU04ACY/111**	**MU04ABY/111**	**MU04ALY/111**	**MU04AAY/111**
5	440	**MU05AFY/111**	**MU05AEY/111**	**MU05ACY/111**	**MU05ABY/111**	**MU05ALY/111**	**MU05AAY/111**
6	525	**MU06AFY/111**	**MU06AEY/111**	**MU06ACY/111**	**MU06ABY/111**	**MU06ALY/111**	**MU06AAY/111**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION U 03

SUITABLE FOR CHAINS:
-793M K 83,8 (See page 259)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	111	85	100




Single track

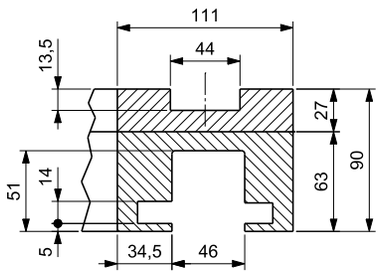


Multi track

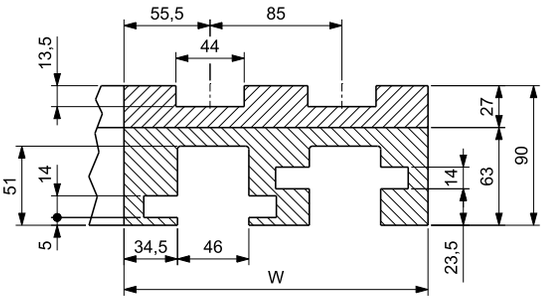

Radius

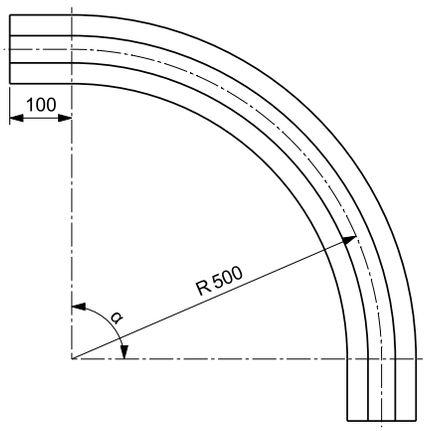

Return guide shoe

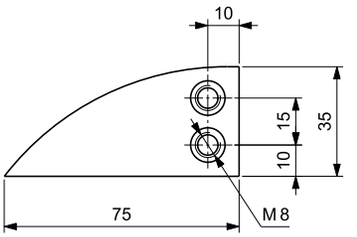

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MU" with "MUE" Example: 2 tracks, 90° curve angle, P/N: MUE02AAY/311	Replace "MU" with "MUP" Example: 2 tracks, 90° curve angle, P/N: MUP02AAY/311

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	111	**MU01AFY/301**	**MU01AEY/301**	**MU01ACY/301**	**MU01ABY/301**	**MU01ALY/301**	**MU01AAY/301**
2	196	**MU02AFY/311**	**MU02AEY/311**	**MU02ACY/311**	**MU02ABY/311**	**MU02ALY/311**	**MU02AAY/311**
3	281	**MU03AFY/311**	**MU03AEY/311**	**MU03ACY/311**	**MU03ABY/311**	**MU03ALY/311**	**MU03AAY/311**
4	366	**MU04AFY/311**	**MU04AEY/311**	**MU04ACY/311**	**MU04ABY/311**	**MU04ALY/311**	**MU04AAY/311**
5	451	**MU05AFY/311**	**MU05AEY/311**	**MU05ACY/311**	**MU05ABY/311**	**MU05ALY/311**	**MU05AAY/311**
6	536	**MU06AFY/311**	**MU06AEY/311**	**MU06ACY/311**	**MU06ABY/311**	**MU06ALY/311**	**MU06AAY/311**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION U 04

SUITABLE FOR CHAINS:
-793M K 83,8 (See page 259)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
750	100	85	100




Single track

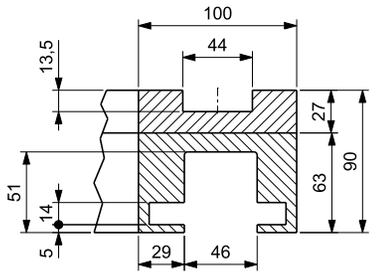


Multi track

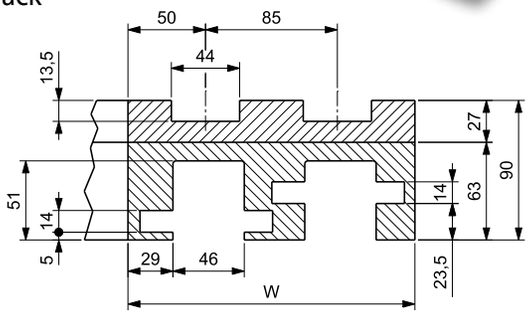

Radius

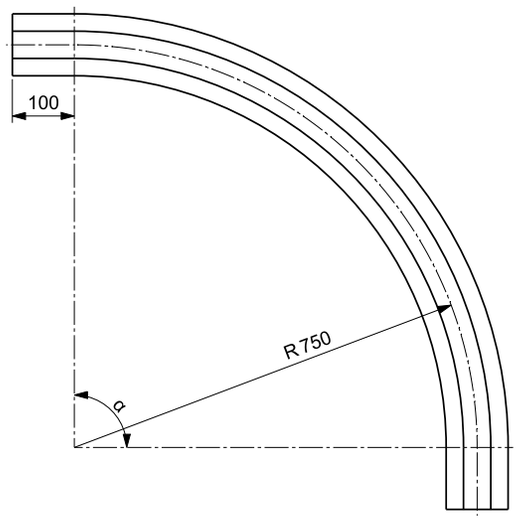

Return guide shoe



On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION			
CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MU" with "MUE" Example: 2 tracks, 90° curve angle, P/N: MUE02EAY/111	Replace "MU" with "MUP" Example: 2 tracks, 90° curve angle, P/N: MUP02EAY/111

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α					
		15°	30°	45°	60°	75°	90°
1	100	**MU01EFY/101**	**MU01EEY/101**	**MU01ECY/101**	**MU01EBY/101**	**MU01ELY/101**	**MU01EAY/101**
2	185	**MU02EFY/111**	**MU02EEY/111**	**MU02ECY/111**	**MU02EBY/111**	**MU02ELY/111**	**MU02EAY/111**
3	270	**MU03EFY/111**	**MU03EEY/111**	**MU03ECY/111**	**MU03EBY/111**	**MU03ELY/111**	**MU03EAY/111**
4	355	**MU04EFY/111**	**MU04EEY/111**	**MU04ECY/111**	**MU04EBY/111**	**MU04ELY/111**	**MU04EAY/111**
5	440	**MU05EFY/111**	**MU05EEY/111**	**MU05ECY/111**	**MU05EBY/111**	**MU05ELY/111**	**MU05EAY/111**
6	525	**MU06EFY/111**	**MU06EEY/111**	**MU06ECY/111**	**MU06EBY/111**	**MU06ELY/111**	**MU06EAY/111**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION U 05

SUITABLE FOR CHAINS:
-793M K 83,8 (See page 259)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
1000	100	85	-




Single track

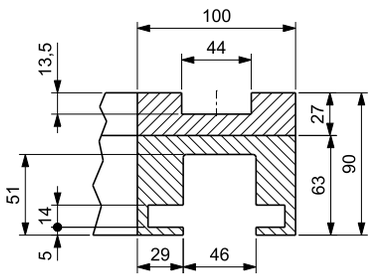


Multi track

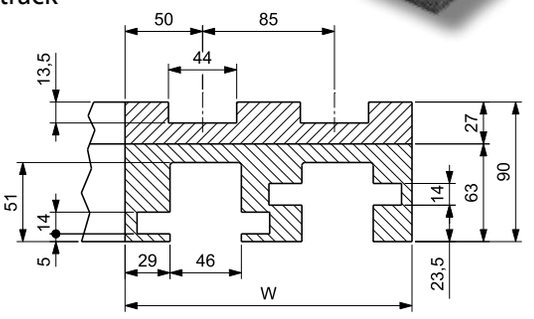

Radius

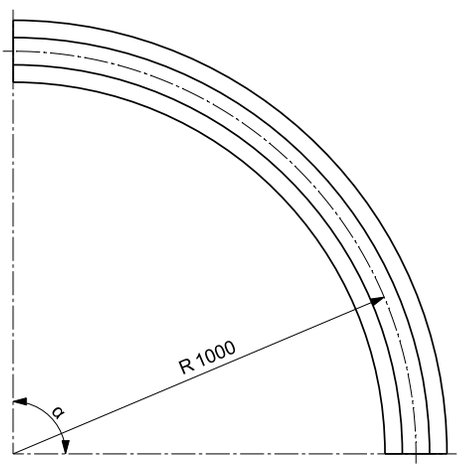

Return guide shoe

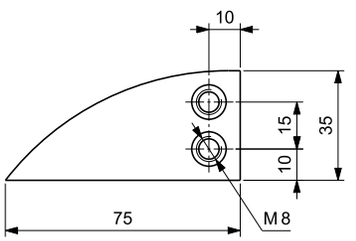

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MU" with "MUE" Example: 2 tracks, 90° curve angle, P/N: MUE02GAY/110	Replace "MU" with "MUD" Example: 2 tracks, 90° curve angle, P/N: MUP02GAY/110

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	100	**MU01GFY/100**	**MU01GEY/100**	**MU01GCY/100**	**MU01GBY/100**	**MU01GLY/100**	**MU01GAY/100**
2	185	**MU02GFY/110**	**MU02GEY/110**	**MU02GCY/110**	**MU02GBY/110**	**MU02GLY/110**	**MU02GAY/110**
3	270	**MU03GFY/110**	**MU03GEY/110**	**MU03GCY/110**	**MU03GBY/110**	**MU03GLY/110**	**MU03GAY/110**
4	355	**MU04GFY/110**	**MU04GEY/110**	**MU04GCY/110**	**MU04GBY/110**	**MU04GLY/110**	**MU04GAY/110**

NOTE: For custom requests with dimensions different from the standard, please refer to page 340.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


VERSION U 06

SUITABLE FOR CHAINS:
-793M K 4½ (See page 259)


RADIUS mm	BASIC WIDTH mm	TRANSVERSAL PITCH mm	INFEED/ OUTFEED LENGTH mm
500	129	120	125




Single track

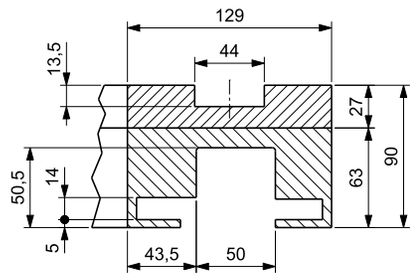


Multi track

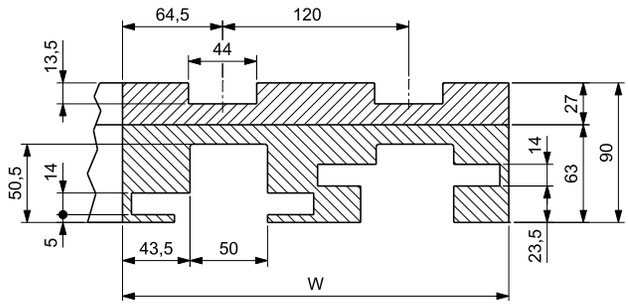

Radius

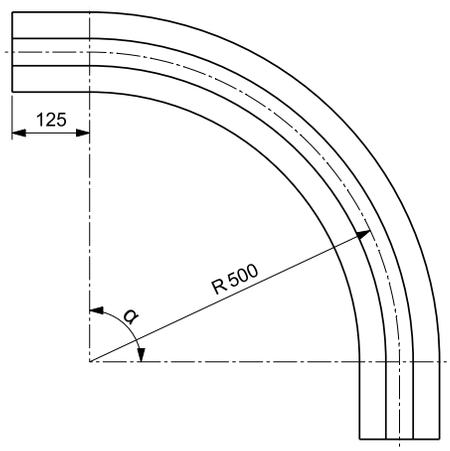

Return guide shoe

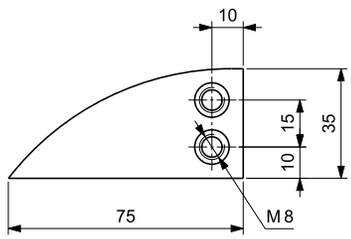

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "MU" with "MUE" Example: 2 tracks, 90° curve angle, P/N: MUE02AAY/442	Replace "MU" with "MUP" Example: 2 tracks, 90° curve angle, P/N: MUP02AAY/442

Curve installation see page 300

Curve material see page 299

N. OF TRACKS	TOTAL WIDTH W mm	PART NUMBER Curve angle α 15°	30°	45°	60°	75°	90°
1	129	**MU01AFY/402**	**MU01AEY/402**	**MU01ACY/402**	**MU01ABY/402**	**MU01ALY/402**	**MU01AAY/402**
2	249	**MU02AFY/442**	**MU02AEY/442**	**MU02ACY/442**	**MU02ABY/442**	**MU02ALY/442**	**MU02AAY/442**
3	369	**MU03AFY/442**	**MU03AEY/442**	**MU03ACY/442**	**MU03ABY/442**	**MU03ALY/442**	**MU03AAY/442**
4	489	**MU04AFY/442**	**MU04AEY/442**	**MU04ACY/442**	**MU04ABY/442**	**MU04ALY/442**	**MU04AAY/442**


NOTE: For custom requests with dimensions different from the standard, please refer to page 340.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MAGNETIC CURVES



On request, Magnetic curves with dimensions different from the standard can be supplied.
Please fill the form below with the requested parameters and contact REGINA customer service.



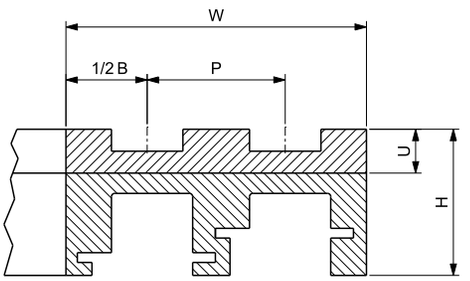

FOR CHAIN SERIES:	REQUESTED CURVE PARAMETERS		
CHAIN WIDTH:	mm	inch	°
FIRST RADIUS R:			
CURVE ANGLE α:			
N. OF TRACKS:			
TRANSVERSAL PITCH P:			
BASIC WIDTH B:			
TOTAL WIDTH W:			
INFEED LENGTH L:			


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop® Matveyor®


TAB, Bevel and Low Pin Center Curves

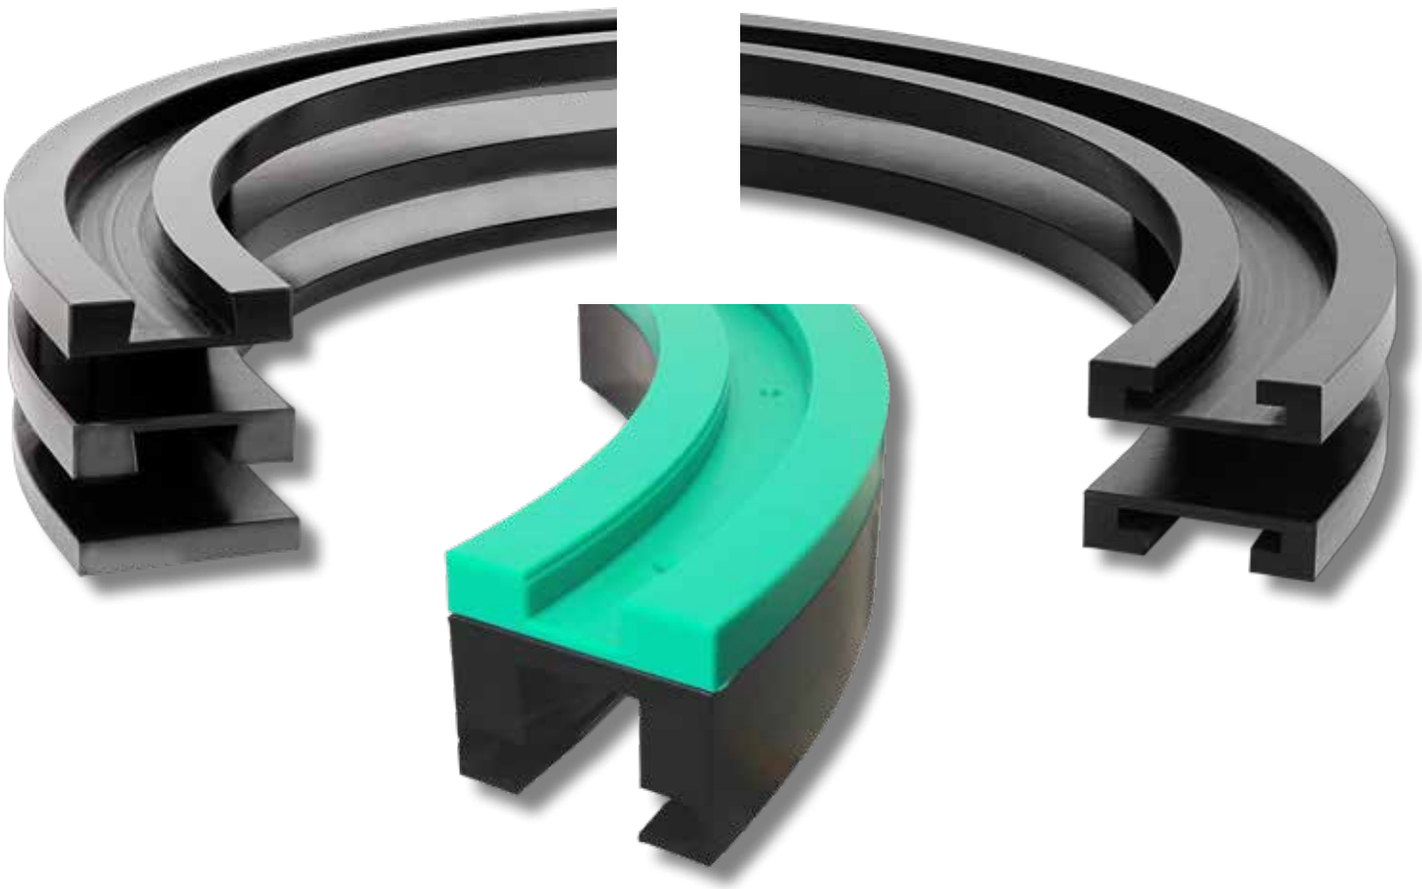


For FliteTop® & Matveyor® SIDEFLEXING CHAINS



TAB curves include both upper and return part.



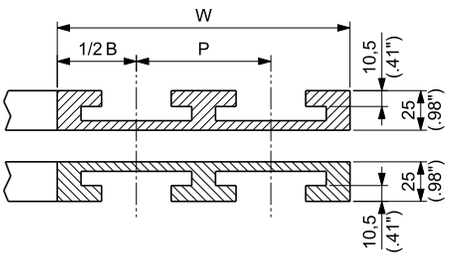

CHAIN WIDTH	TRANSVERSAL PITCH P		BASIC WIDTH B	
	mm	inch	mm	inch
3 ¼" 83,8 mm	85	3.35	100	3.94
4 ½"	120	4.72	130	5.12
7 ½"	195	7.68	200	7.87

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	UHMWPE	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "T80" with "T80E" Example: Radius 500 mm, 1 track, 90° curve angle for 880T chain, P/N: T80EKD1A/1000	Replace "T80" with "T80P" Example: Radius 500 mm, 1 track, 90° curve angle for 880T chain, P/N: T80PKD1A/1000



Curve material see page 16

CHAIN TYPE		RADIUS* R		N. OF TRACKS	TOTAL WIDTH W		PART NUMBER Curve angle α					
Series	Width	mm	inch		mm	inch	15°	30°	45°	60°	75°	90°
878T 982T	3 ¼"	200	7.874	1	100	3.937	**T80KD1D/1F00**	**T80KD1D/1E00**	**T80KD1D/1C00**	**T80KD1D/1B00**	**T80KD1D/1L00**	**T80KD1D/1000**
		457,2	18	1	100	3.937	**T80KD1O/1F00**	**T80KD1O/1E00**	**T80KD1O/1C00**	**T80KD1O/1B00**	**T80KD1O/1L00**	**T80KD1O/1000**
				2	185	7.283	**T80KD2O/1F00**	**T80KD2O/1E00**	**T80KD2O/1C00**	**T80KD2O/1B00**	**T80KD2O/1L00**	**T80KD2O/1000**
				3	270	10.630	**T80KD3O/1F00**	**T80KD3O/1E00**	**T80KD3O/1C00**	**T80KD3O/1B00**	**T80KD3O/1L00**	**T80KD3O/1000**
				4	355	13.189	**T80KD4O/1F00**	**T80KD4O/1E00**	**T80KD4O/1C00**	**T80KD4O/1B00**	**T80KD4O/1L00**	**T80KD4O/1000**
				5	440	15.748	**T80KD5O/1F00**	**T80KD5O/1E00**	**T80KD5O/1C00**	**T80KD5O/1B00**	**T80KD5O/1L00**	**T80KD5O/1000**
PHDG 981T HFX 880T 880TA		500	19.685	1	100	3.937	**T80KD1A/1F00**	**T80KD1A/1E00**	**T80KD1A/1C00**	**T80KD1A/1B00**	**T80KD1A/1L00**	**T80KD1A/1000**
				2	185	7.283	**T80KD2A/1F00**	**T80KD2A/1E00**	**T80KD2A/1C00**	**T80KD2A/1B00**	**T80KD2A/1L00**	**T80KD2A/1000**
				3	270	10.630	**T80KD3A/1F00**	**T80KD3A/1E00**	**T80KD3A/1C00**	**T80KD3A/1B00**	**T80KD3A/1L00**	**T80KD3A/1000**
				4	355	13.189	**T80KD4A/1F00**	**T80KD4A/1E00**	**T80KD4A/1C00**	**T80KD4A/1B00**	**T80KD4A/1L00**	**T80KD4A/1000**
				5	440	15.748	**T80KD5A/1F00**	**T80KD5A/1E00**	**T80KD5A/1C00**	**T80KD5A/1B00**	**T80KD5A/1L00**	**T80KD5A/1000**
880T 879T	3 ¼" 83.8 mm	610	24.016	1	100	3.937	**T80KD1C/1F00**	**T80KD1C/1E00**	**T80KD1C/1C00**	**T80KD1C/1B00**	**T80KD1C/1L00**	**T80KD1C/1000**
				2	185	7.283	**T80KD2C/1F00**	**T80KD2C/1E00**	**T80KD2C/1C00**	**T80KD2C/1B00**	**T80KD2C/1L00**	**T80KD2C/1000**
				3	270	10.630	**T80KD3C/1F00**	**T80KD3C/1E00**	**T80KD3C/1C00**	**T80KD3C/1B00**	**T80KD3C/1L00**	**T80KD3C/1000**
				4	355	13.189	**T80KD4C/1F00**	**T80KD4C/1E00**	**T80KD4C/1C00**	**T80KD4C/1B00**	**T80KD4C/1L00**	**T80KD4C/1000**
				5	440	15.748	**T80KD5C/1F00**	**T80KD5C/1E00**	**T80KD5C/1C00**	**T80KD5C/1B00**	**T80KD5C/1L00**	**T80KD5C/1000**
881T 981T 783T		800	31.496	1	100	3.937	**T80KD1T/1F00**	**T80KD1T/1E00**	**T80KD1T/1C00**	**T80KD1T/1B00**	**T80KD1T/1L00**	**T80KD1T/1000**
				2	185	7.283	**T80KD2T/1F00**	**T80KD2T/1E00**	**T80KD2T/1C00**	**T80KD2T/1B00**	**T80KD2T/1L00**	**T80KD2T/1000**
				3	270	10.630	**T80KD3T/1F00**	**T80KD3T/1E00**	**T80KD3T/1C00**	**T80KD3T/1B00**	**T80KD3T/1L00**	**T80KD3T/1000**
				4	355	13.189	**T80KD4T/1F00**	**T80KD4T/1E00**	**T80KD4T/1C00**	**T80KD4T/1B00**	**T80KD4T/1L00**	**T80KD4T/1000**
				5	440	15.748	**T80KD5T/1F00**	**T80KD5T/1E00**	**T80KD5T/1C00**	**T80KD5T/1B00**	**T80KD5T/1L00**	**T80KD5T/1000**
793T		1000	39.370	1	100	3.937	**T80KD1G/1F00**	**T80KD1G/1E00**	**T80KD1G/1C00**	**T80KD1G/1B00**	**T80KD1G/1L00**	**T80KD1G/1000**
				2	185	7.283	**T80KD2G/1F00**	**T80KD2G/1E00**	**T80KD2G/1C00**	**T80KD2G/1B00**	**T80KD2G/1L00**	**T80KD2G/1000**
				3	270	10.630	**T80KD3G/1F00**	**T80KD3G/1E00**	**T80KD3G/1C00**	**T80KD3G/1B00**	**T80KD3G/1L00**	**T80KD3G/1000**
				4	355	13.189	**T80KD4G/1F00**	**T80KD4G/1E00**	**T80KD4G/1C00**	**T80KD4G/1B00**	**T80KD4G/1L00**	**T80KD4G/1000**
				5	440	15.748	**T80KD5G/1F00**	**T80KD5G/1E00**	**T80KD5G/1C00**	**T80KD5G/1B00**	**T80KD5G/1L00**	**T80KD5G/1000**
981T 880T HFX 880T	4 ½"	610	24.016	1	130	5.118	**T80KG1C/1F00**	**T80KG1C/1E00**	**T80KG1C/1C00**	**T80KG1C/1B00**	**T80KG1C/1L00**	**T80KG1C/1000**
				2	250	9.843	**T80KG2C/1F00**	**T80KG2C/1E00**	**T80KG2C/1C00**	**T80KG2C/1B00**	**T80KG2C/1L00**	**T80KG2C/1000**
879T 881T		800	31.496	1	130	5.118	**T80KG1T/1F00**	**T80KG1T/1E00**	**T80KG1T/1C00**	**T80KG1T/1B00**	**T80KG1T/1L00**	**T80KG1T/1000**
				2	250	9.843	**T80KG2T/1F00**	**T80KG2T/1E00**	**T80KG2T/1C00**	**T80KG2T/1B00**	**T80KG2T/1L00**	**T80KG2T/1000**
783T 793T		1000	39.370	1	130	5.118	**T80KG1G/1F00**	**T80KG1G/1E00**	**T80KG1G/1C00**	**T80KG1G/1B00**	**T80KG1G/1L00**	**T80KG1G/1000**
				2	250	9.843	**T80KG2G/1F00**	**T80KG2G/1E00**	**T80KG2G/1C00**	**T80KG2G/1B00**	**T80KG2G/1L00**	**T80KG2G/1000**
881T 981T PHDG 981T	7 ½"	610	24.016	1	200	7.874	**T80KL1C/1F00**	**T80KL1C/1E00**	**T80KL1C/1C00**	**T80KL1C/1B00**	**T80KL1C/1L00**	**T80KL1C/1000**
				2	395	15.551	**T80KL2C/1F00**	**T80KL2C/1E00**	**T80KL2C/1C00**	**T80KL2C/1B00**	**T80KL2C/1L00**	**T80KL2C/1000**
		800	31.496	1	200	7.874	**T80KL1T/1F00**	**T80KL1T/1E00**	**T80KL1T/1C00**	**T80KL1T/1B00**	**T80KL1T/1L00**	**T80KL1T/1000**
				2	395	15.551	**T80KL2T/1F00**	**T80KL2T/1E00**	**T80KL2T/1C00**	**T80KL2T/1B00**	**T80KL2T/1L00**	**T80KL2T/1000**
		1000	39.370	1	200	7.874	**T80KL1G/1F00**	**T80KL1G/1E00**	**T80KL1G/1C00**	**T80KL1G/1B00**	**T80KL1G/1L00**	**T80KL1G/1000**
				2	395	15.551	**T80KL2G/1F00**	**T80KL2G/1E00**	**T80KL2G/1C00**	**T80KL2G/1B00**	**T80KL2G/1L00**	**T80KL2G/1000**

* First track is intended.


NOTE: for custom requests with dimensions different from the standard, please refer to page 345.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

For FliteTop® SIDEFLEXING CHAINS



TAB curves include both upper and return part.



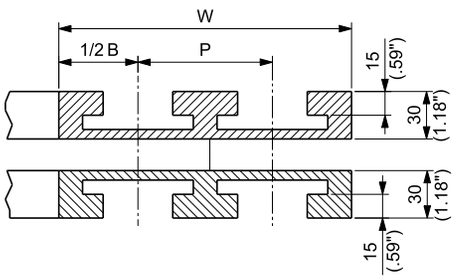

CHAIN WIDTH	TRANSVERSAL PITCH P		BASIC WIDTH B	
	mm	inch	mm	inch
3 ¾"	Single track		110	4.33
4 ½"			130	5.12
6"			170	6.69
7 ½"			200	7.87
10"			270	10.63
12"			320	12.60

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	UHMWPE	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "T82" with "T82E" Example: Radius 700 mm, 1 track, 90° curve angle for LBP 882T K 3¾ chain, P/N: T82EKEA1Z/1000	Replace "T82" with "T82P" Example: Radius 700 mm, 1 track, 90° curve angle for LBP 882T K 3¾ chain, P/N: T82PKEA1Z/1000

Curve material see page 16

CHAIN TYPE		RADIUS R		N. OF TRACKS	TOTAL WIDTH W		PART NUMBER Curve angle α					
Series	Width	mm	inch		mm	inch	15°	30°	45°	60°	75°	90°
LBP 882T	3 ¾"	700	27.559	1	110	4.331	**T82KEA1Z/1F00**	**T82KEA1Z/1E00**	**T82KEA1Z/1C00**	**T82KEA1Z/1B00**	**T82KEA1Z/1L00**	**T82KEA1Z/1000**
882T		610	24.016	1	130	5.118	**T82KG1C/1F00**	**T82KG1C/1E00**	**T82KG1C/1C00**	**T82KG1C/1B00**	**T82KG1C/1L00**	**T82KG1C/1000**
HFX 882T	4 ½"	800	31.496	1	130	5.118	**T82KG1T/1F00**	**T82KG1T/1E00**	**T82KG1T/1C00**	**T82KG1T/1B00**	**T82KG1T/1L00**	**T82KG1T/1000**
LBP 882T		1000	39.370	1	130	5.118	**T82KG1G/1F00**	**T82KG1G/1E00**	**T82KG1G/1C00**	**T82KG1G/1B00**	**T82KG1G/1L00**	**T82KG1G/1000**
		610	24.016	1	170	6.69	**T82KH1C/1F00**	**T82KH1C/1E00**	**T82KH1C/1C00**	**T82KH1C/1B00**	**T82KH1C/1L00**	**T82KH1C/1000**
882T	6"	800	31.496	1	170	6.69	**T82KH1T/1F00**	**T82KH1T/1E00**	**T82KH1T/1C00**	**T82KH1T/1B00**	**T82KH1T/1L00**	**T82KH1T/1000**
		1000	39.370	1	170	6.69	**T82KH1G/1F00**	**T82KH1G/1E00**	**T82KH1G/1C00**	**T82KH1G/1B00**	**T82KH1G/1L00**	**T82KH1G/1000**
882T		610	24.016	1	200	7.874	**T82KL1C/1F00**	**T82KL1C/1E00**	**T82KL1C/1C00**	**T82KL1C/1B00**	**T82KL1C/1L00**	**T82KL1C/1000**
HFX 882T	7 ½"	800	31.496	1	200	7.874	**T82KL1T/1F00**	**T82KL1T/1E00**	**T82KL1T/1C00**	**T82KL1T/1B00**	**T82KL1T/1L00**	**T82KL1T/1000**
LBP 882T		1000	39.370	1	200	7.874	**T82KL1G/1F00**	**T82KL1G/1E00**	**T82KL1G/1C00**	**T82KL1G/1B00**	**T82KL1G/1L00**	**T82KL1G/1000**
882T		610	24.016	1	270	10.630	**T82KM1C/1F00**	**T82KM1C/1E00**	**T82KM1C/1C00**	**T82KM1C/1B00**	**T82KM1C/1L00**	**T82KM1C/1000**
HFX 882T	10"	800	31.496	1	270	10.630	**T82KM1T/1F00**	**T82KM1T/1E00**	**T82KM1T/1C00**	**T82KM1T/1B00**	**T82KM1T/1L00**	**T82KM1T/1000**
LBP 882T		1000	39.370	1	270	10.630	**T82KM1G/1F00**	**T82KM1G/1E00**	**T82KM1G/1C00**	**T82KM1G/1B00**	**T82KM1G/1L00**	**T82KM1G/1000**
882T		610	24.016	1	320	12.598	**T82KN1C/1F00**	**T82KN1C/1E00**	**T82KN1C/1C00**	**T82KN1C/1B00**	**T82KN1C/1L00**	**T82KN1C/1000**
HFX 882T	12"	800	31.496	1	320	12.598	**T82KN1T/1F00**	**T82KN1T/1E00**	**T82KN1T/1C00**	**T82KN1T/1B00**	**T82KN1T/1L00**	**T82KN1T/1000**
LBP 882T		1000	39.370	1	320	12.598	**T82KN1G/1F00**	**T82KN1G/1E00**	**T82KN1G/1C00**	**T82KN1G/1B00**	**T82KN1G/1L00**	**T82KN1G/1000**

NOTE: for custom requests with dimensions different from the standard, please refer to page 345.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




For FliteTop® SIDEFLEXING CHAINS

TAB curves include both upper and return part.


FOR 1843T CHAIN

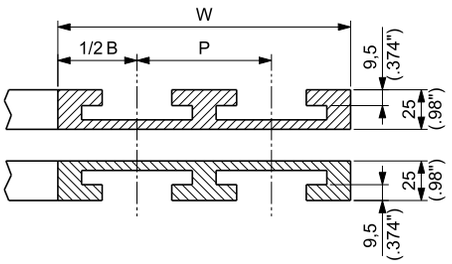


FOR 1701T CHAIN

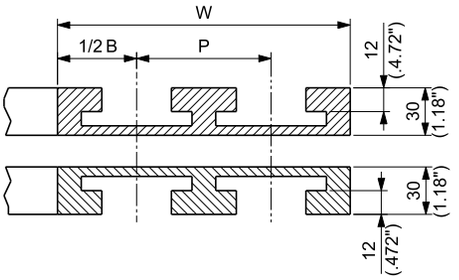

FOR ALL OTHER CHAINS

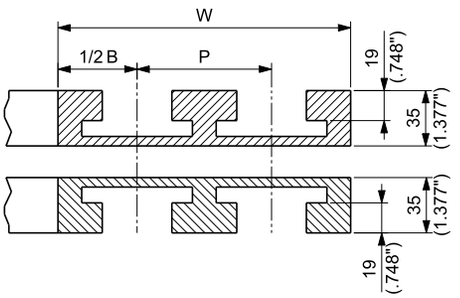



CHAIN WIDTH	TRANSVERSAL PITCH P		BASIC WIDTH B	
	mm	inch	mm	inch
1 ¼"	Single track		50	1.97
53mm			100	3.94
2 ¼"			75	2.95
3 ¼"			100	3.94
4 ½"			130	5.12
6'			170	6.69
7 ½"			200	7.87
10"			270	10.63
12"			320	12.60
16"			420	16.54

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	UHMWPE	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "T73" with "T73E" Replace "T43" with "T43E" Replace "T17" with "T17E" Example: Radius 500 mm, 1 track, 90° curve angle for 1863T K 2 ¼" chain, P/N: T73EKS1A/1000	Replace "T73" with "T73P" Replace "T43" with "T43P" Replace "T17" with "T17P" Example: Radius 500 mm, 1 track, 90° curve angle for 1863T K 2 ¼" chain, P/N: T73PKS1A/1000

Curve material see page 16


CHAIN TYPE		RADIUS R		N. OF TRACKS	TOTAL WIDTH W		PART NUMBER Curve angle α					
Series	Width	mm	inch		mm	inch	15°	30°	45°	60°	75°	90°
1863T	2 ¼"	500	19.685	1	75	2.95	**T73KS1A/1F00**	**T73KS1A/1E00**	**T73KS1A/1C00**	**T73KS1A/1B00**	**T73KS1A/1L00**	**T73KS1A/1000**
1874T 1863T 1873T HFX 1873T	3 ¼"	500	19.685	1	100	3.94	**T73KD1A/1F00**	**T73KD1A/1E00**	**T73KD1A/1C00**	**T73KD1A/1B00**	**T73KD1A/1L00**	**T73KD1A/1000**
		610	24.016	1	100	3.94	**T73KD1C/1F00**	**T73KD1C/1E00**	**T73KD1C/1C00**	**T73KD1C/1B00**	**T73KD1C/1L00**	**T73KD1C/1000**
		800	31.496	1	100	3.94	**T73KD1T/1F00**	**T73KD1T/1E00**	**T73KD1T/1C00**	**T73KD1T/1B00**	**T73KD1T/1L00**	**T73KD1T/1000**
		1000	39.370	1	100	3.94	**T73KD1G/1F00**	**T73KD1G/1E00**	**T73KD1G/1C00**	**T73KD1G/1B00**	**T73KD1G/1L00**	**T73KD1G/1000**
1874T 1863T 1873T HFX 1873T	4 ½"	610	24.016	1	130	5.12	**T73KG1C/1F00**	**T73KG1C/1E00**	**T73KG1C/1C00**	**T73KG1C/1B00**	**T73KG1C/1L00**	**T73KG1C/1000**
		800	31.496	1	130	5.12	**T73KG1T/1F00**	**T73KG1T/1E00**	**T73KG1T/1C00**	**T73KG1T/1B00**	**T73KG1T/1L00**	**T73KG1T/1000**
		1000	39.370	1	130	5.12	**T73KG1G/1F00**	**T73KG1G/1E00**	**T73KG1G/1C00**	**T73KG1G/1B00**	**T73KG1G/1L00**	**T73KG1G/1000**
1874T 1873T HFX 1873T	6"	500	19.685	1	170	6.69	**T73KH1A/1F00**	**T73KH1A/1E00**	**T73KH1A/1C00**	**T73KH1A/1B00**	**T73KH1A/1L00**	**T73KH1A/1000**
1874T 1863T 1873T HFX 1873T	7 ½"	610	24.016	1	200	7.87	**T73KL1C/1F00**	**T73KL1C/1E00**	**T73KL1C/1C00**	**T73KL1C/1B00**	**T73KL1C/1L00**	**T73KL1C/1000**
		800	31.496	1	200	7.87	**T73KL1T/1F00**	**T73KL1T/1E00**	**T73KL1T/1C00**	**T73KL1T/1B00**	**T73KL1T/1L00**	**T73KL1T/1000**
		1000	39.370	1	200	7.87	**T73KL1G/1F00**	**T73KL1G/1E00**	**T73KL1G/1C00**	**T73KL1G/1B00**	**T73KL1G/1L00**	**T73KL1G/1000**
1873T HFX 1873T	10"	610	24.016	1	270	10.63	**T73KM1C/1F00**	**T73KM1C/1E00**	**T73KM1C/1C00**	**T73KM1C/1B00**	**T73KM1C/1L00**	**T73KM1C/1000**
		800	31.496	1	270	10.63	**T73KM1T/1F00**	**T73KM1T/1E00**	**T73KM1T/1C00**	**T73KM1T/1B00**	**T73KM1T/1L00**	**T73KM1T/1000**
		1000	39.370	1	270	10.63	**T73KM1G/1F00**	**T73KM1G/1E00**	**T73KM1G/1C00**	**T73KM1G/1B00**	**T73KM1G/1L00**	**T73KM1G/1000**
1863T 1873T HFX 1873T	12"	610	24.016	1	320	12.60	**T73KN1C/1F00**	**T73KN1C/1E00**	**T73KN1C/1C00**	**T73KN1C/1B00**	**T73KN1C/1L00**	**T73KN1C/1000**
		800	31.496	1	320	12.60	**T73KN1T/1F00**	**T73KN1T/1E00**	**T73KN1T/1C00**	**T73KN1T/1B00**	**T73KN1T/1L00**	**T73KN1T/1000**
		1000	39.370	1	320	12.60	**T73KN1G/1F00**	**T73KN1G/1E00**	**T73KN1G/1C00**	**T73KN1G/1B00**	**T73KN1G/1L00**	**T73KN1G/1000**
1863T	16"	800	31.496	1	420	16.54	**T73KJ1T/1F00**	**T73KJ1T/1E00**	**T73KJ1T/1C00**	**T73KJ1T/1B00**	**T73KJ1T/1L00**	**T73KJ1T/1000**
		1000	39.370	1	420	16.54	**T73KJ1G/1F00**	**T73KJ1G/1E00**	**T73KJ1G/1C00**	**T73KJ1G/1B00**	**T73KJ1G/1L00**	**T73KJ1G/1000**
1843T	1 ¼"	300	11.811	1	50	1.97	**T43KPA1Y/1F00**	**T43KPA1Y/1E00**	**T43KPA1Y/1C00**	**T43KPA1Y/1B00**	**T43KPA1Y/1L00**	**T43KPA1Y/1000**
		500	19.685	1	50	1.97	**T43KPA1A/1F00**	**T43KPA1A/1E00**	**T43KPA1A/1C00**	**T43KPA1A/1B00**	**T43KPA1A/1L00**	**T43KPA1A/1000**
1701T	53mm	250	9.843	1	100	3.94	**T17KD1V/1F00**	**T17KD1V/1E00**	**T17KD1V/1C00**	**T17KD1V/1B00**	**T17KD1V/1L00**	**T17KD1V/1000**
		500	19.685	1	100	3.94	**T17KD1A/1F00**	**T17KD1A/1E00**	**T17KD1A/1C00**	**T17KD1A/1B00**	**T17KD1A/1L00**	**T17KD1A/1000**


NOTE: for custom requests with dimensions different from the standard, please refer to page 345.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

On request, TAB curves with dimensions different from the standard can be supplied.
Please fill the form below with the requested parameters and contact REGINA customer service.





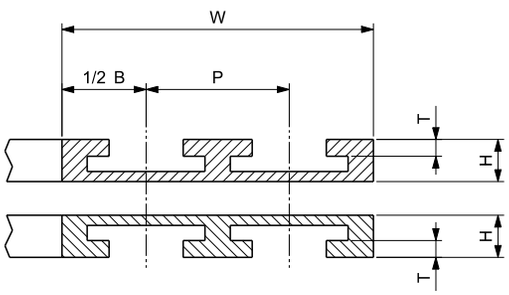



FOR CHAIN SERIES:	REQUESTED CURVE PARAMETERS		
CHAIN WIDTH:	mm	inch	°
FIRST RADIUS R:			
CURVE ANGLE α:			
N. OF TRACKS:			
TRANSVERSAL PITCH P:			
BASIC WIDTH B:			
TOTAL WIDTH W:			
INFEED LENGTH L:			

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

For Matveyor® SIDEFLEXING BELTS

TAB curves for sideflexing belts include upper part only.
For more information on how to support the sideflexing belts in the return part, please contact REGINA application engineers.

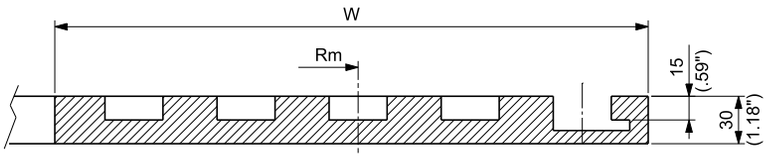

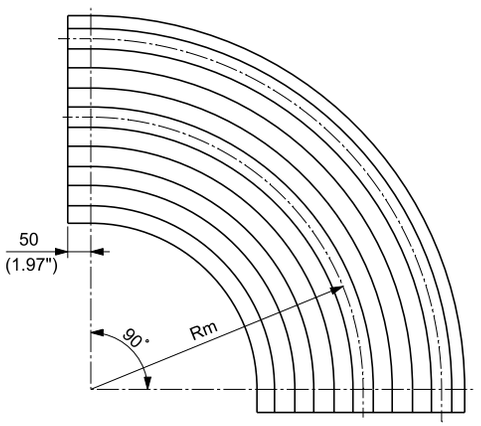

The curves are manufactured in UHMWPE material

Curve material
see page 16


BELT TYPE	BELT WIDTH		MEDIUM RADIUS Rm		CURVE WIDTH W		PART NUMBER
Series	mm	inch	mm	inch	mm	inch	
2556HTB	255	10.039	600	23.622	281	11.063	**T55HK0281/B10**
	340	13.386	800	31.496	366	14.409	**T55HK0366/C10**
	425	16.732	1000	39.370	451	17.756	**T55HK0451/D10**
	510	20.079	1200	47.224	536	21.102	**T55HK0536/E10**
	595	23.425	1400	55.118	621	24.449	**T55HK0621/F10**
	680	26.772	1600	62.992	706	27.795	**T55HK0706/G10**
	765	30.118	1800	70.866	791	31.142	**T55HK0791/H10**
	850	33.465	2000	78.740	876	34.488	**T55HK0876/J10**
2556HTB-SR	340	13.386	500	19.685	366	14.409	**T55HK0366/A10**
	425	16.732	600	23.622	451	17.756	**T55HK0451/B10**
	510	20.079	800	31.496	536	21.102	**T55HK0536/C10**
	595	23.425	1000	39.370	621	24.449	**T55HK0621/D10**
	680	26.772	1200	47.224	706	27.795	**T55HK0706/E10**
	765	30.118	1400	55.118	791	31.142	**T55HK0791/F10**
	850	33.465	1600	62.992	876	34.488	**T55HK0876/G10**


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

For FliteTop® SIDEFLEXING CHAINS



Bevel curves include 3 parts: upper, return and support plate.



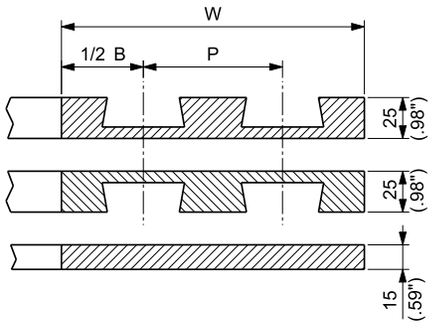

CHAIN WIDTH	TRANSVERSAL PITCH P		BASIC WIDTH B	
	mm	inch	mm	inch
3 ¼" 83,8 mm	85	3.35	100	3.94
4 ½"	120	4.72	130	5.12
7 ½"	195	7.68	200	7.87

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	UHMWPE	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "B80" with "B80E" Example: Radius 500 mm, 1 track, 90° curve angle for 880 K 3¼ chain, P/N: B80EKD1A/1000	Replace "B80" with "B80P" Example: Radius 500 mm, 1 track, 90° curve angle for 880 K 3¼ chain, P/N: B80PKD1A/1000

Curve material see page 16

CHAIN TYPE		RADIUS* R		N. OF TRACKS	TOTAL WIDTH W		PART NUMBER Curve angle α					
Series	Width	mm	inch		mm	inch	15°	30°	45°	60°	75°	90°
				1	100	3.937	B80KD1O/1F00	B80KD1O/1E00	B80KD1O/1C00	B80KD1O/1B00	B80KD1O/1L00	B80KD1O/1000
				2	185	7.283	B80KD2O/1F00	B80KD2O/1E00	B80KD2O/1C00	B80KD2O/1B00	B80KD2O/1L00	B80KD2O/1000
		457,2	18	3	270	10.630	B80KD3O/1F00	B80KD3O/1E00	B80KD3O/1C00	B80KD3O/1B00	B80KD3O/1L00	B80KD3O/1000
				4	355	13.189	B80KD4O/1F00	B80KD4O/1E00	B80KD4O/1C00	B80KD4O/1B00	B80KD4O/1L00	B80KD4O/1000
				5	440	15.748	B80KD5O/1F00	B80KD5O/1E00	B80KD5O/1C00	B80KD5O/1B00	B80KD5O/1L00	B80KD5O/1000
				1	100	3.937	B80KD1A/1F00	B80KD1A/1E00	B80KD1A/1C00	B80KD1A/1B00	B80KD1A/1L00	B80KD1A/1000
				2	185	7.283	B80KD2A/1F00	B80KD2A/1E00	B80KD2A/1C00	B80KD2A/1B00	B80KD2A/1L00	B80KD2A/1000
		500	19.685	3	270	10.630	B80KD3A/1F00	B80KD3A/1E00	B80KD3A/1C00	B80KD3A/1B00	B80KD3A/1L00	B80KD3A/1000
				4	355	13.189	B80KD4A/1F00	B80KD4A/1E00	B80KD4A/1C00	B80KD4A/1B00	B80KD4A/1L00	B80KD4A/1000
				5	440	15.748	B80KD5A/1F00	B80KD5A/1E00	B80KD5A/1C00	B80KD5A/1B00	B80KD5A/1L00	B80KD5A/1000
				1	100	3.937	B80KD1C/1F00	B80KD1C/1E00	B80KD1C/1C00	B80KD1C/1B00	B80KD1C/1L00	B80KD1C/1000
880				2	185	7.283	B80KD2C/1F00	B80KD2C/1E00	B80KD2C/1C00	B80KD2C/1B00	B80KD2C/1L00	B80KD2C/1000
879	3 ¼" 83.8 mm	610	24.016	3	270	10.630	B80KD3C/1F00	B80KD3C/1E00	B80KD3C/1C00	B80KD3C/1B00	B80KD3C/1L00	B80KD3C/1000
				4	355	13.189	B80KD4C/1F00	B80KD4C/1E00	B80KD4C/1C00	B80KD4C/1B00	B80KD4C/1L00	B80KD4C/1000
881				5	440	15.748	B80KD5C/1F00	B80KD5C/1E00	B80KD5C/1C00	B80KD5C/1B00	B80KD5C/1L00	B80KD5C/1000
				1	100	3.937	B80KD1T/1F00	B80KD1T/1E00	B80KD1T/1C00	B80KD1T/1B00	B80KD1T/1L00	B80KD1T/1000
981				2	185	7.283	B80KD2T/1F00	B80KD2T/1E00	B80KD2T/1C00	B80KD2T/1B00	B80KD2T/1L00	B80KD2T/1000
		800	31.496	3	270	10.630	B80KD3T/1F00	B80KD3T/1E00	B80KD3T/1C00	B80KD3T/1B00	B80KD3T/1L00	B80KD3T/1000
				4	355	13.189	B80KD4T/1F00	B80KD4T/1E00	B80KD4T/1C00	B80KD4T/1B00	B80KD4T/1L00	B80KD4T/1000
				5	440	15.748	B80KD5T/1F00	B80KD5T/1E00	B80KD5T/1C00	B80KD5T/1B00	B80KD5T/1L00	B80KD5T/1000
				6	525	20.669	B80KD6T/1F00	B80KD6T/1E00	B80KD6T/1C00	B80KD6T/1B00	B80KD6T/1L00	B80KD6T/1000
				1	100	3.937	B80KD1G/1F00	B80KD1G/1E00	B80KD1G/1C00	B80KD1G/1B00	B80KD1G/1L00	B80KD1G/1000
				2	185	7.283	B80KD2G/1F00	B80KD2G/1E00	B80KD2G/1C00	B80KD2G/1B00	B80KD2G/1L00	B80KD2G/1000
		1000	39.370	3	270	10.630	B80KD3G/1F00	B80KD3G/1E00	B80KD3G/1C00	B80KD3G/1B00	B80KD3G/1L00	B80KD3G/1000
				4	355	13.189	B80KD4G/1F00	B80KD4G/1E00	B80KD4G/1C00	B80KD4G/1B00	B80KD4G/1L00	B80KD4G/1000
				5	440	15.748	B80KD5G/1F00	B80KD5G/1E00	B80KD5G/1C00	B80KD5G/1B00	B80KD5G/1L00	B80KD5G/1000
		610	24.016	1	130	5.118	B80KG1C/1F00	B80KG1C/1E00	B80KG1C/1C00	B80KG1C/1B00	B80KG1C/1L00	B80KG1C/1000
880				2	250	9.843	B80KG2C/1F00	B80KG2C/1E00	B80KG2C/1C00	B80KG2C/1B00	B80KG2C/1L00	B80KG2C/1000
879	4 ½"	800	31.496	1	130	5.118	B80KG1T/1F00	B80KG1T/1E00	B80KG1T/1C00	B80KG1T/1B00	B80KG1T/1L00	B80KG1T/1000
881				2	250	9.843	B80KG2T/1F00	B80KG2T/1E00	B80KG2T/1C00	B80KG2T/1B00	B80KG2T/1L00	B80KG2T/1000
981		1000	39.370	1	130	5.118	B80KG1G/1F00	B80KG1G/1E00	B80KG1G/1C00	B80KG1G/1B00	B80KG1G/1L00	B80KG1G/1000
				2	250	9.843	B80KG2G/1F00	B80KG2G/1E00	B80KG2G/1C00	B80KG2G/1B00	B80KG2G/1L00	B80KG2G/1000
		610	24.016	1	200	7.874	B80KL1C/1F00	B80KL1C/1E00	B80KL1C/1C00	B80KL1C/1B00	B80KL1C/1L00	B80KL1C/1000
				2	395	15.551	B80KL2C/1F00	B80KL2C/1E00	B80KL2C/1C00	B80KL2C/1B00	B80KL2C/1L00	B80KL2C/1000
881		800	31.496	1	200	7.874	B80KL1T/1F00	B80KL1T/1E00	B80KL1T/1C00	B80KL1T/1B00	B80KL1T/1L00	B80KL1T/1000
981	7 ½"			2	395	15.551	B80KL2T/1F00	B80KL2T/1E00	B80KL2T/1C00	B80KL2T/1B00	B80KL2T/1L00	B80KL2T/1000
		1000	39.370	1	200	7.874	B80KL1G/1F00	B80KL1G/1E00	B80KL1G/1C00	B80KL1G/1B00	B80KL1G/1L00	B80KL1G/1000
				2	395	15.551	B80KL2G/1F00	B80KL2G/1E00	B80KL2G/1C00	B80KL2G/1B00	B80KL2G/1L00	B80KL2G/1000


* First track is intended.
NOTE: for custom requests with dimensions different from the standard, please refer to page 349.


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

For FliteTop® SIDEFLEXING CHAINS



Bevel curves include 3 parts: upper, return and support plate.



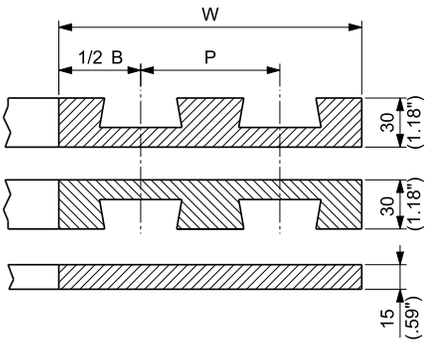

CHAIN WIDTH	TRANSVERSAL PITCH P		BASIC WIDTH B	
	mm	inch	mm	inch
4 ½"	Single track		130	5.12
7 ½"			200	7.87
10"			270	10.63
12"			320	12.60

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	UHMWPE	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "B82" with "B82E" Example: Radius 610 mm, 1 tracks, 90° curve angle for 882 K 4½ chain, P/N: B82EKG1C/1000	Replace "B82" with "B82P" Example: Radius 610 mm, 1 tracks, 90° curve angle for 882 K 4½ chain, P/N: B82PKG1C/1000

Curve material see page 16

CHAIN TYPE		RADIUS R		N. OF TRACKS	TOTAL WIDTH W		PART NUMBER Curve angle α					
Series	Width	mm	inch		mm	inch	15°	30°	45°	60°	75°	90°
882	4 ½"	610	24.016	1	130	5.118	**B82KG1C/1F00**	**B82KG1C/1E00**	**B82KG1C/1C00**	**B82KG1C/1B00**	**B82KG1C/1L00**	**B82KG1C/1000**
		800	31.496	1	130	5.118	**B82KG1T/1F00**	**B82KG1T/1E00**	**B82KG1T/1C00**	**B82KG1T/1B00**	**B82KG1T/1L00**	**B82KG1T/1000**
		1000	39.370	1	130	5.118	**B82KG1G/1F00**	**B82KG1G/1E00**	**B82KG1G/1C00**	**B82KG1G/1B00**	**B82KG1G/1L00**	**B82KG1G/1000**
	7 ½"	610	24.016	1	200	7.874	**B82KL1C/1F00**	**B82KL1C/1E00**	**B82KL1C/1C00**	**B82KL1C/1B00**	**B82KL1C/1L00**	**B82KL1C/1000**
		800	31.496	1	200	7.874	**B82KL1T/1F00**	**B82KL1T/1E00**	**B82KL1T/1C00**	**B82KL1T/1B00**	**B82KL1T/1L00**	**B82KL1T/1000**
		1000	39.370	1	200	7.874	**B82KL1G/1F00**	**B82KL1G/1E00**	**B82KL1G/1C00**	**B82KL1G/1B00**	**B82KL1G/1L00**	**B82KL1G/1000**
	10"	610	24.016	1	270	10.630	**B82KM1C/1F00**	**B82KM1C/1E00**	**B82KM1C/1C00**	**B82KM1C/1B00**	**B82KM1C/1L00**	**B82KM1C/1000**
		800	31.496	1	270	10.630	**B82KM1T/1F00**	**B82KM1T/1E00**	**B82KM1T/1C00**	**B82KM1T/1B00**	**B82KM1T/1L00**	**B82KM1T/1000**
		1000	39.370	1	270	10.630	**B82KM1G/1F00**	**B82KM1G/1E00**	**B82KM1G/1C00**	**B82KM1G/1B00**	**B82KM1G/1L00**	**B82KM1G/1000**
	12"	610	24.016	1	320	12.598	**B82KN1C/1F00**	**B82KN1C/1E00**	**B82KN1C/1C00**	**B82KN1C/1B00**	**B82KN1C/1L00**	**B82KN1C/1000**
		800	31.496	1	320	12.598	**B82KN1T/1F00**	**B82KN1T/1E00**	**B82KN1T/1C00**	**B82KN1T/1B00**	**B82KN1T/1L00**	**B82KN1T/1000**
		1000	39.370	1	320	12.598	**B82KN1G/1F00**	**B82KN1G/1E00**	**B82KN1G/1C00**	**B82KN1G/1B00**	**B82KN1G/1L00**	**B82KN1G/1000**


NOTE: for custom requests with dimensions different from the standard, please refer to page 349.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

BEVEL CURVES



On request, BEVEL curves with dimensions different from the standard can be supplied.
Please fill the form below with the requested parameters and contact REGINA customer service.

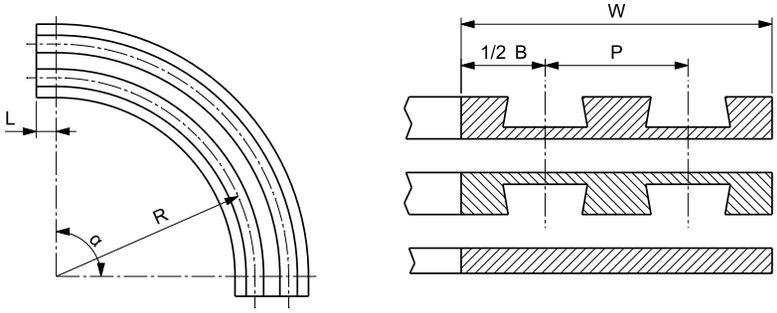


FOR CHAIN SERIES:	REQUESTED CURVE PARAMETERS		
CHAIN WIDTH:	mm	inch	°
FIRST RADIUS R:			
CURVE ANGLE α:			
N. OF TRACKS:			
TRANSVERSAL PITCH P:			
BASIC WIDTH B:			
TOTAL WIDTH W:			
INFEED LENGTH L:			

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


For Matveyor® SIDEFLEXING CHAINS

Low Pin Center curves include both upper and return parts.


CHAIN WIDTH	TRANSVERSAL PITCH P		BASIC WIDTH B		INFEED/ OUTFEED LENGHT	
	mm	inch	mm	inch	mm	inch
4 ½"	116	4.57	125	5.92	-	-




Single track

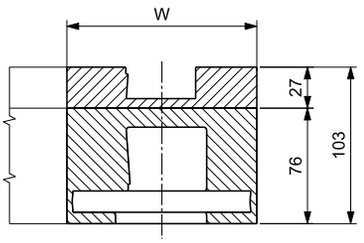

Multi track

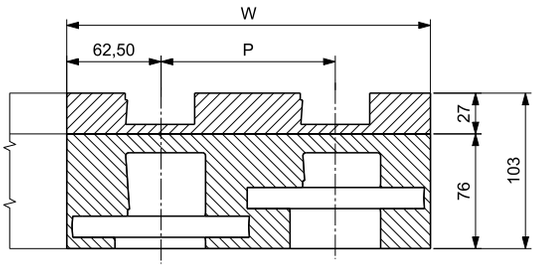

Radius

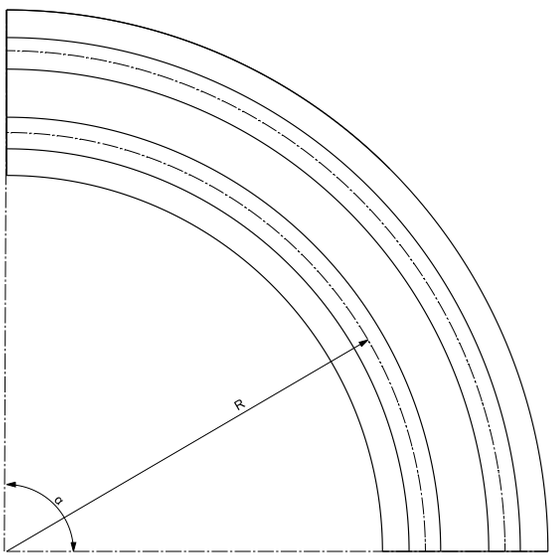

On request, Upper part is available in Self-Lubricating UHMWPE & Oil-filled PA.

PART NUMBER IDENTIFICATION

CURVES	SUPREME -A	e-SLIDE	SUPREME -S
UPPER PART MATERIAL	UHMWPE	High performance Self-lubricating UHMWPE	Oil-filled PA
PART NUMBERS	See table below	Replace "L93" with "L93E" Example: Radius 610 mm, 1 track, 90° curve angle, P/N: L93EKGC1C/0000	Replace "L93" with "L93P" Example: Radius 610 mm, 1 track, 90° curve angle, P/N: L93PKGC1C/0000


Curve material see page 16


CHAIN TYPE		RADIUS* R		N. OF TRACKS	TOTAL WIDTH W		PART NUMBER Curve angle α					
Series	Width	mm	inch		mm	inch	15°	30°	45°	60°	75°	90°
793L	4 ½"	610	24.02	1	125	4.92	**L93KGC1C/0F00**	**L93KGC1C/0E00**	**L93KGC1C/0C00**	**L93KGC1C/0B00**	**L93KGC1C/0L00**	**L93KGC1C/0000**
				2	241	9.49	**L93KGC2C/0F80**	**L93KGC2C/0E80**	**L93KGC2C/0C80**	**L93KGC2C/0B80**	**L93KGC2C/0L80**	**L93KGC2C/0080**
				3	357	14.06	**L93KGC3C/0F80**	**L93KGC3C/0E80**	**L93KGC3C/0C80**	**L93KGC3C/0B80**	**L93KGC3C/0L80**	**L93KGC3C/0080**
				4	473	18.62	**L93KGC4C/0F80**	**L93KGC4C/0E80**	**L93KGC4C/0C80**	**L93KGC4C/0B80**	**L93KGC4C/0L80**	**L93KGC4C/0080**
				5	589	23.19	**L93KGC5C/0F80**	**L93KGC5C/0E80**	**L93KGC5C/0C80**	**L93KGC5C/0B80**	**L93KGC5C/0L80**	**L93KGC5C/0080**


* First track is intended.
NOTE: for custom requests with dimensions different from the standard, please refer to page 351.

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

On request, Low Pin Center curves with dimensions different from the standard can be supplied.
Please fill the form below with the requested parameters and contact REGINA customer service.



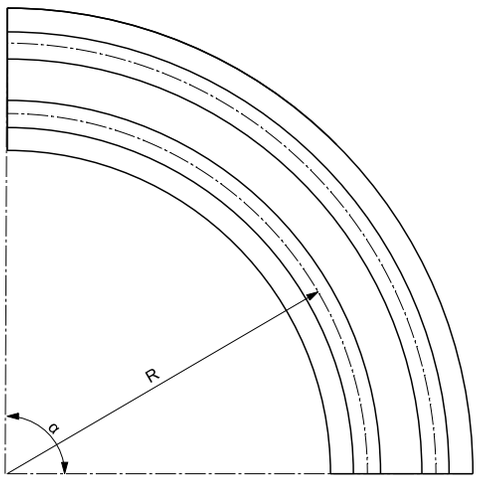

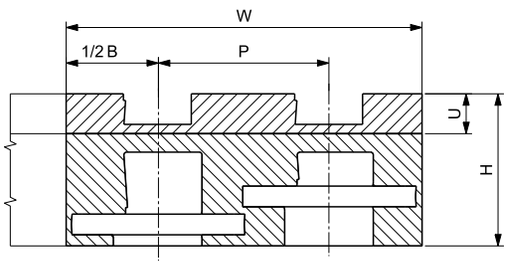

FOR CHAIN SERIES:	REQUESTED CURVE PARAMETERS		
CHAIN WIDTH:	mm	inch	°
FIRST RADIUS R:			
CURVE ANGLE α:			
N. OF TRACKS:			
TRANSVERSAL PITCH P:			
BASIC WIDTH B:			
TOTAL WIDTH W:			
INFEED LENGTH L:			

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

REGINA CHAIN

PERFORMANCE IN MOTION

FliteTop® Matveyor® ULTOP®

Conveyor Components








MODULAR TRANSFER PLATES WITH STEEL ROLLERS





Innovative modular transfer plate with steel rollers allows to smoothly convey products from one conveyor to the next. The stainless steel rollers are equipped with bearings to minimize the friction with products, eliminating the risk of stranded products on transfer between production runs.
The special plates design allows for an easy and fast installation on the conveyor through a "T" style bar creating an extemeley compact transfer between conveyors.
The modular design provides a side by side installation of multiple plates to fit metric (85mm width increments) standard conveyors.

MATERIALS	
PLATE:	PGF REINFORCED POLYAMIDE
ROLLERS:	SS STAINLESS STEEL




VERSION FOR INSTALLATION BY SCREWS
See page 354

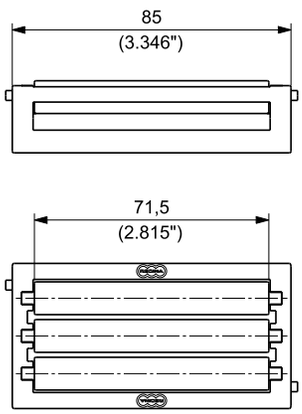





PART NUMBER **CC000475**

APPLICATION

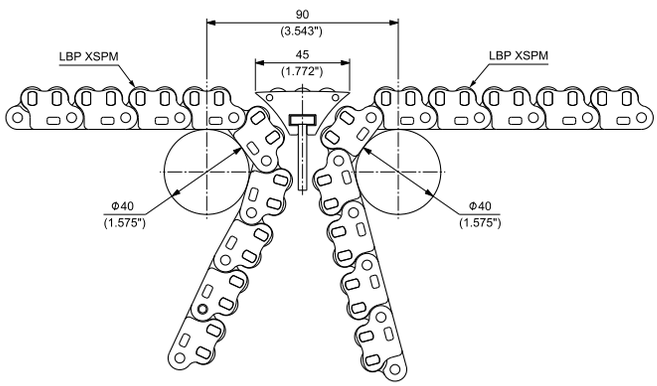


Example of installation using LBP XSPM belts.
For installations with other belts series,
please contact REGINA Technical Department.

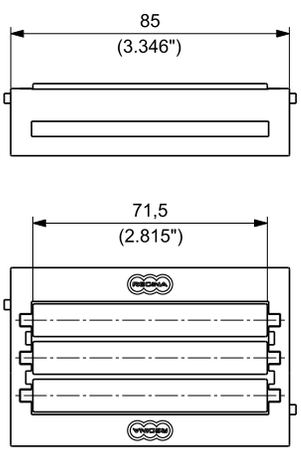

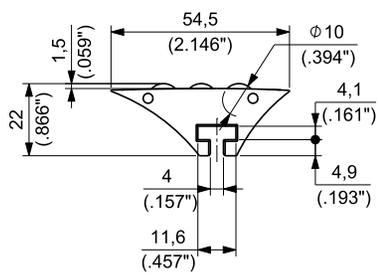

PART NUMBER **CC000481**
(Specifically developed for 4650 belt series)

APPLICATION

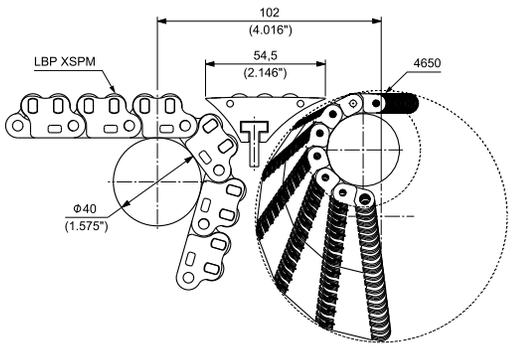

Example of installation using 4650 and LBP XSPM belts.
For installations with 4650 belt and other belts series,
please contact REGINA Technical Department.

Standard packaging:
10 pieces

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

MODULAR TRANSFER PLATES WITH STEEL ROLLERS



Modular transfer plate with steel rollers allows to smoothly convey products from one conveyor to the next. The stainless steel rollers are equipped with bearings to minimize the friction with products, eliminating the risk of stranded products on transfer between production runs. The transfer plate can be easily installed on the conveyor by screws, acessible from the top using an allen key. The modular design provides a side by side installation of multiple plates to fit metric (85mm width increments) standard conveyors.


NEW

MATERIALS		
PLATE:	PGF	REINFORCED POLYAMIDE
ROLLERS AND SCREWS*:	SS	STAINLESS STEEL


*Screws are included in the transfer plate.




VERSION FOR INSTALLATION THROUGH A "T" STYLE BAR
See page 353

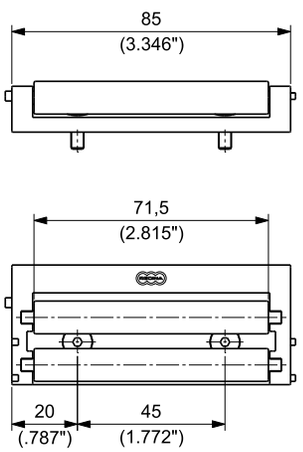

PART NUMBER **CC000483**



APPLICATION

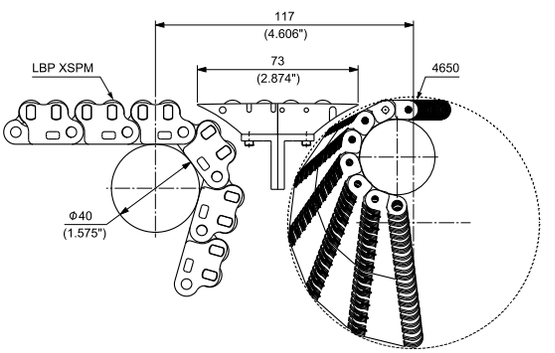

Example of installation using 4650 and LBP XSPM belts.
For installations with other belts series,
please contact REGINA technical department.

Standard packaging:
10 pieces

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


MODULAR TRANSFER PLATES WITH PLASTIC ROLLERS




Modular transfer plates with rollers create a smooth transfer head between two conveyors.
They are available in 85 mm and 115 mm width and they can be used individually or back to back.

MATERIALS		
PLATE AND ROLLERS:	UP	ULTRA PERFORMANCE HOMOPOLYMER DELRIN ®
SCREWS*:	SS	STAINLESS STEEL


*Screws are included in the transfer plate.

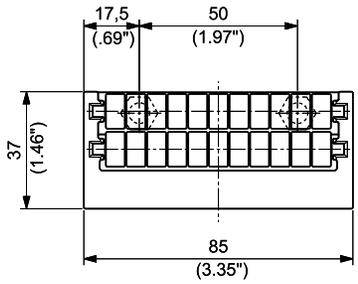


PART NUMBER **LTP-2RKQ**

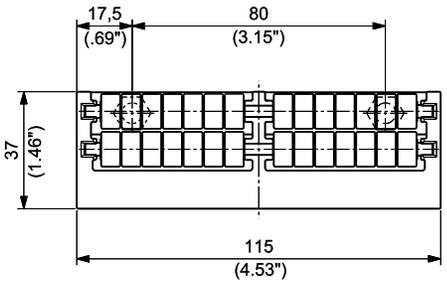


PART NUMBER **LTP-2RKG**




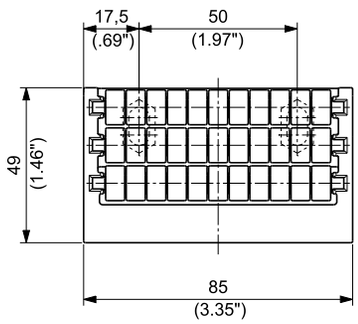


PART NUMBER **LTP-3RKQ**

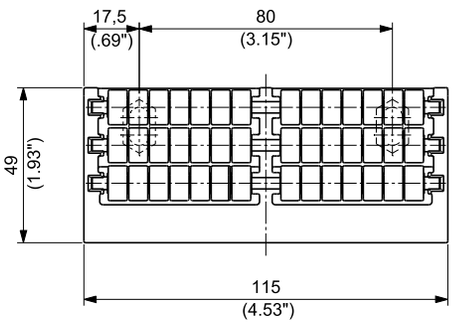


PART NUMBER **LTP-3RKG**

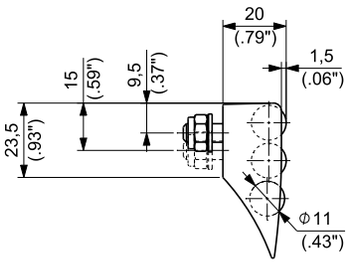


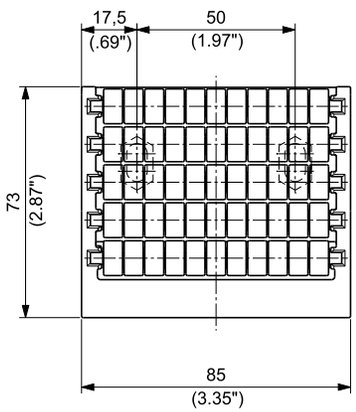

PART NUMBER **LTP-5RKQ**

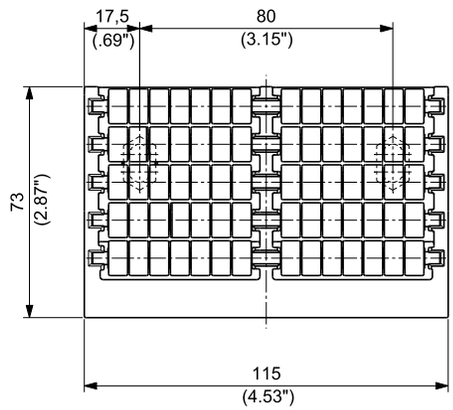

PART NUMBER **LTP-5RKG**

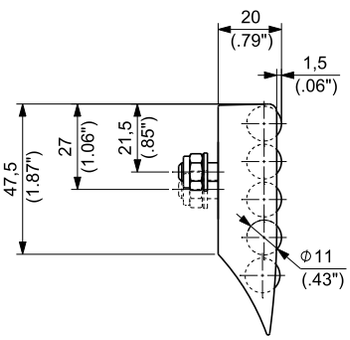

Standard packaging:
10 pieces

Conveyor Components

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

RETURN ROLLERS




Completely closed design for high hygiene standard, suitable also for food applications.
Extremely lightweight design and optimum rotation capability.
No absorption of liquids and lubricants combined with high chemical resistance.


MATERIALS

ROLLERS: **HDPE** HD POLYETHYLENE


STANDARD ROLLER




FLANGED ROLLER



DOUBLE ROLLER

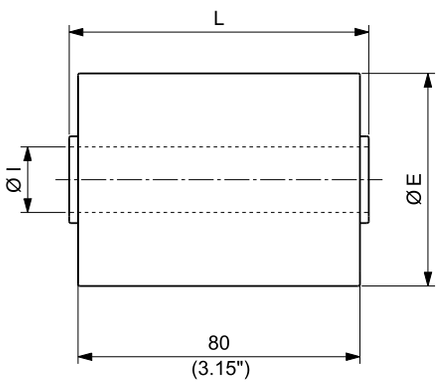

FLANGED DOUBLE ROLLER

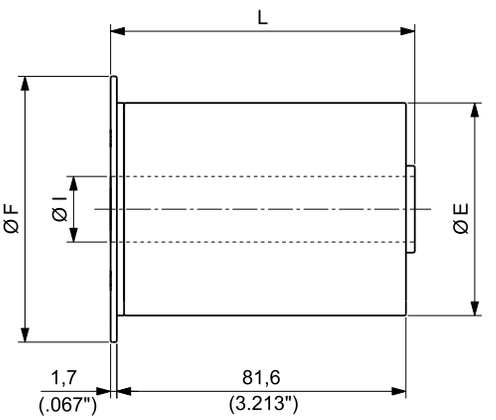

VERSION	EXTERNAL DIAMETER Ø E		LENGTH L		FLANGE DIAMETER Ø F		PART NUMBER FOR SHAFT DIAMETER Ø I			
	mm	inch	mm	inch	mm	inch	16 mm	18 mm	¾"	20 mm
STANDARD ROLLER	40	1.575	41,0	1.614	-	-	**CC000424**	**CC000427**	**CC000430**	**CC000433**
	50	1.969	41,0	1.614	-	-	**CC000425**	**CC000428**	**CC000431**	**CC000434**
	60	2.362	41,0	1.614	-	-	**CC000426**	**CC000429**	**CC000432**	**CC000435**
DOUBLE ROLLER	40	1.575	82,5	3.248	-	-	**CC000054**	**CC000060**	**CC000066**	**CC000072**
			84,5	3.327	-	-	**CC000055**	**CC000061**	**CC000067**	**CC000073**
	50	1.969	82,5	3.248	-	-	**CC000056**	**CC000062**	**CC000068**	**CC000074**
			84,5	3.327	-	-	**CC000057**	**CC000063**	**CC000069**	**CC000075**
	60	2.362	82,5	3.248	-	-	**CC000058**	**CC000064**	**CC000070**	**CC000076**
			84,5	3.327	-	-	**CC000059**	**CC000065**	**CC000071**	**CC000077**
FLANGED ROLLER	40	1.575	41,0	1.614	55	2.165	**CC000448**	**CC000451**	**CC000454**	**CC000457**
	50	1.969	41,0	1.614	65	2.559	**CC000449**	**CC000452**	**CC000455**	**CC000458**
	60	2.362	41,0	1.614	75	2.953	**CC000450**	**CC000453**	**CC000456**	**CC000459**
FLANGED DOUBLE ROLLERS	40	1.575	85,8	3.378	55	2.165	**CC000102**	**CC000105**	**CC000108**	**CC000111**
	50	1.969	85,8	3.378	65	2.559	**CC000103**	**CC000106**	**CC000109**	**CC000112**
	60	2.362	85,8	3.378	75	2.953	**CC000104**	**CC000107**	**CC000110**	**CC000113**

Standard packaging: 50 pieces

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


RUBBERIZED RETURN ROLLERS




Completely closed design for high hygiene standard, suitable also for food applications. The external rubber layer guarantees high grip with the chain (superior roller rotation capability), minimum chain wear and reduced noise level.

MATERIALS		
ROLLERS:	HDPE	HD POLYETHYLENE
RUBBER:	TPE	THERMOPLASTIC Hardness: 65 ShA


STANDARD RUBBERIZED ROLLER




FLANGED RUBBERIZED ROLLER

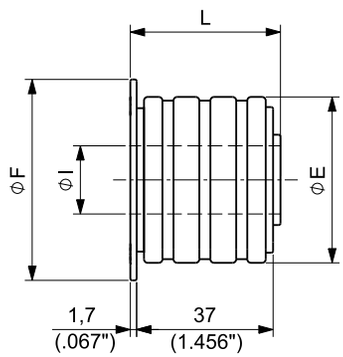

DOUBLE RUBBERIZED ROLLER

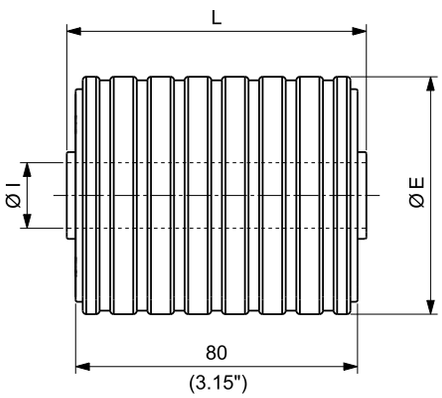

FLANGED RUBBERIZED DOUBLE ROLLER

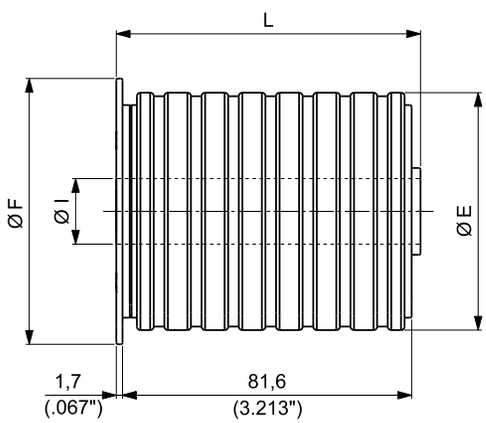


VERSION	EXTERNAL DIAMETER Ø E		LENGTH L		FLANGE DIAMETER Ø F		PART NUMBER FOR SHAFT DIAMETER Ø$_I$			
	mm	inch	mm	inch	mm	inch	16 mm	18 mm	¾"	20 mm
STANDARD RUBBERIZED ROLLER	45	1.772	41,0	1.614	-	-	**CC000436**	**CC000439**	**CC000442**	**CC000445**
	57	2.244	41,0	1.614	-	-	**CC000437**	**CC000440**	**CC000443**	**CC000446**
	67	2.638	41,0	1.614	-	-	**CC000438**	**CC000441**	**CC000444**	**CC000447**
DOUBLE RUBBERIZED ROLLER	45	1.772	82,5	3.248	-	-	**CC000078**	**CC000153**	**CC000090**	**CC000096**
			84,5	3.327	-	-	**CC000079**	**CC000085**	**CC000091**	**CC000097**
	57	2.244	82,5	3.248	-	-	**CC000080**	**CC000086**	**CC000092**	**CC000098**
			84,5	3.327	-	-	**CC000081**	**CC000087**	**CC000093**	**CC000099**
	67	2.638	82,5	3.248	-	-	**CC000082**	**CC000088**	**CC000094**	**CC000100**
			84,5	3.327	-	-	**CC000083**	**CC000089**	**CC000095**	**CC000101**
FLANGED RUBBERIZED ROLLER	45	1.772	41,0	1.614	55	2.165	**CC000460**	**CC000463**	**CC000466**	**CC000469**
	57	2.244	41,0	1.614	65	2.559	**CC000461**	**CC000464**	**CC000467**	**CC000470**
	67	2.638	41,0	1.614	75	2.953	**CC000462**	**CC000465**	**CC000468**	**CC000471**
FLANGED RUBBERIZED DOUBLE ROLLER	45	1.772	85,8	3.378	55	2.165	**CC000114**	**CC000117**	**CC000120**	**CC000123**
	57	2.244	85,8	3.378	65	2.559	**CC000115**	**CC000118**	**CC000121**	**CC000124**
	67	2.638	85,8	3.378	75	2.953	**CC000116**	**CC000119**	**CC000122**	**CC000125**

Standard packaging: 50 pieces

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved


GUIDE FLANGES

Lightweight design with excellent chemical resistance and no liquids absorption.




MATERIALS		
FLANGES:	**PP**	POLYPROPYLENE

STANDARD FLANGE

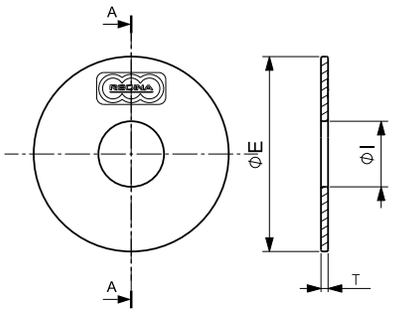

REDUCED THICKNESS FLANGE

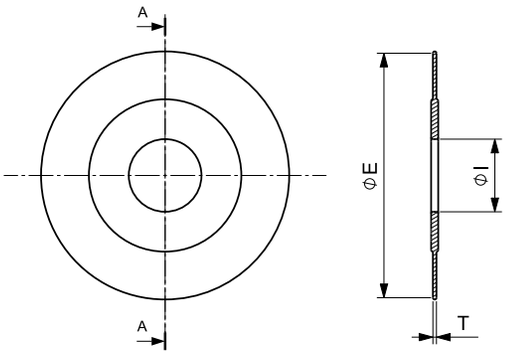

VERSION	EXTERNAL DIAMETER Ø E		THICKNESS T		PART NUMBER FOR SHAFT DIAMETER Ø$_I$			
	mm	inch	mm	inch	16 mm	18 mm	¾"	20 mm
STANDARD FLANGE	55	2.165	2,0	0.079	**CC000126**	**CC000129**	**CC000132**	**CC000135**
	65	2.559	2,0	0.079	**CC000127**	**CC000130**	**CC000133**	**CC000136**
	75	2.953	2,0	0.079	**CC000128**	**CC000131**	**CC000134**	**CC000137**
REDUCED THICKNESS FLANGE	40	1.575	1,0	0.039	**CC000138**	**CC000139**	**CC000140**	**CC000141**
	70	2.756	1,0	0.039	**CC000142**	**CC000143**	**CC000144**	**CC000145**


Standard packaging:
100 pieces

RETURN SHOE GUIDE

The use of the shoe guide is recommended to support LBP chains in return parts and after the catenary sag close to drive sprockets.



MATERIALS		
RETURN SHOE GUIDE:	**HDPE**	HD POLYETHYLENE

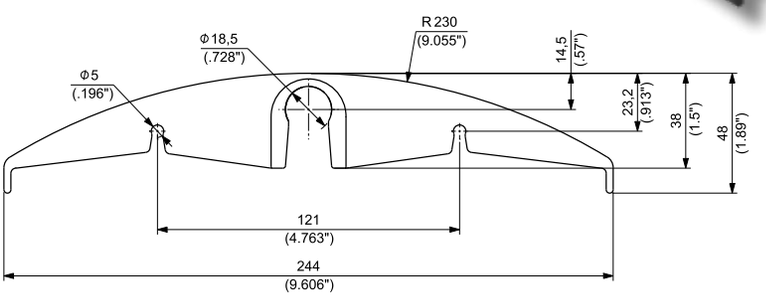




PART NUMBER **CC000150**

Standard packaging:
15 pieces


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

CHAIN GUIDE WEAR STRIPS

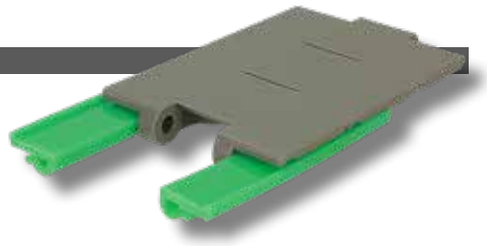


Very low coefficient of friction for low chain pull and energy saving.
High wear resistance for extended chains and wear strips life.

L-PROFILE




MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS003GC**	60 M COILS

APPLICATION

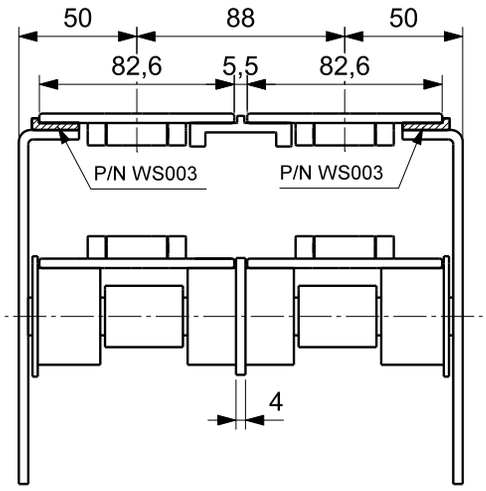


Z-PROFILE




MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS001GC**	60 M COILS

APPLICATION

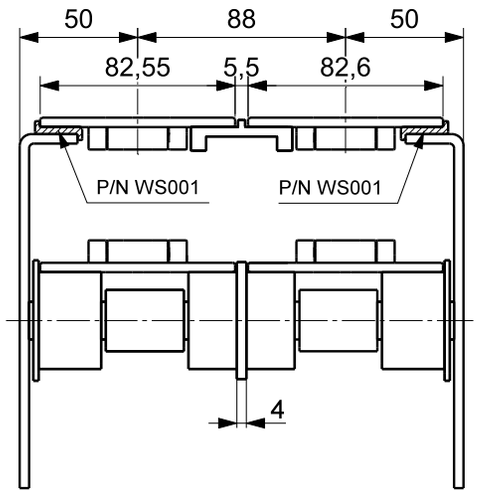


Z REINFORCED-PROFILE



MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS004GC**	60 M COILS
NEW e-SLIDE	**WS004EC**	60 M COILS

APPLICATION

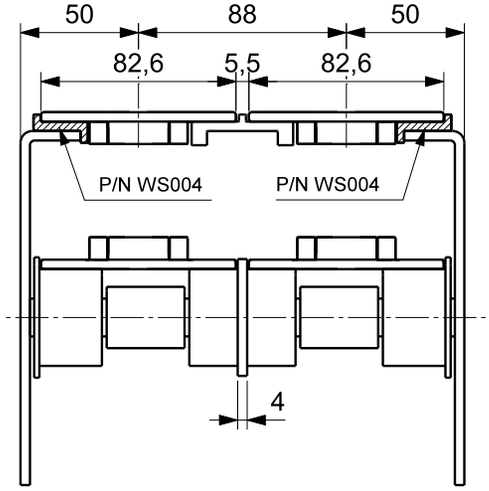


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

CHAIN GUIDE WEAR STRIPS




LS-PROFILE




MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS008GC**	60 M COILS
NEW e-SLIDE	**WS008EC**	60 M COILS

APPLICATION

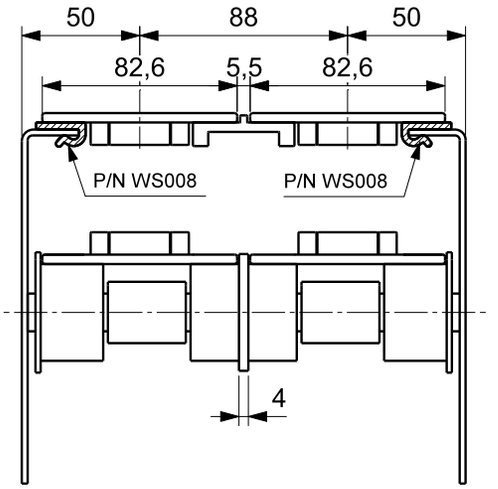


ZS-PROFILE




MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS007GC**	60 M COILS
NEW e-SLIDE	**WS007EC**	60 M COILS

APPLICATION

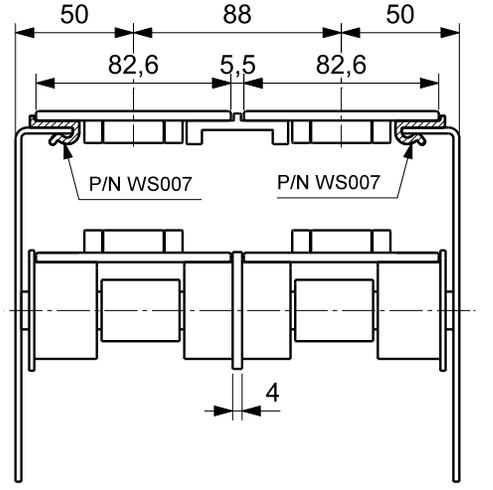


T-PROFILE




MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS002GC**	60 M COILS


APPLICATION

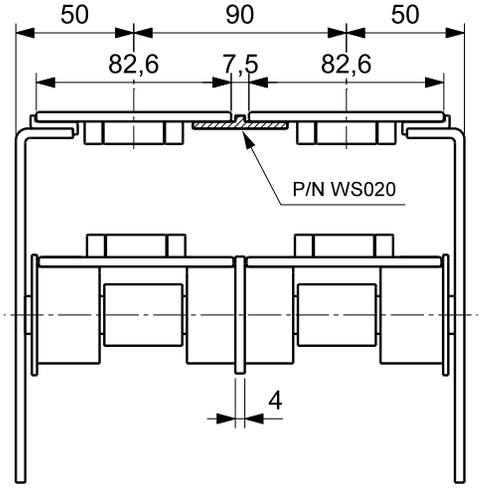

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

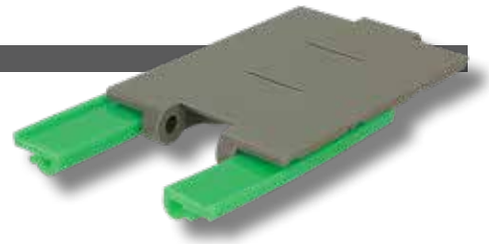


U-PROFILE

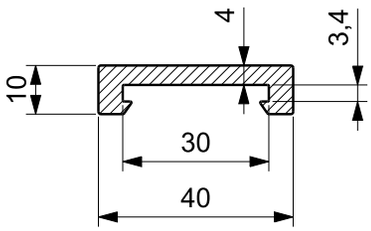


MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS023GS**	3 M BARS
	WS023GL	6 M BARS
NEW e-SLIDE	**WS023ES**	3 M BARS
	WS023EL	6 M BARS


APPLICATION

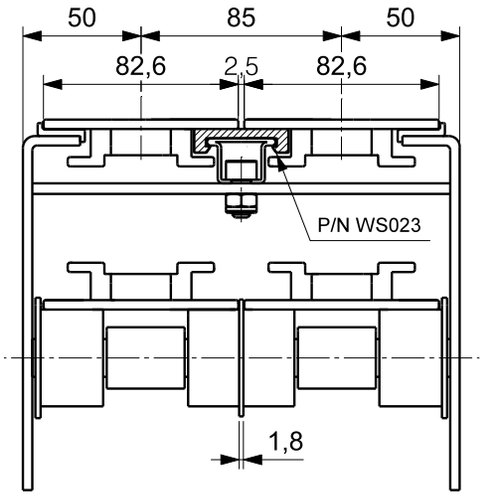


METAL PROFILE NEW



METAL PROFILE + U-PROFILE NEW

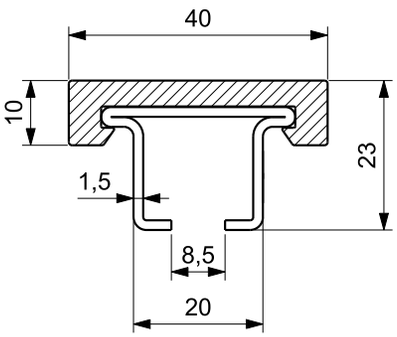


APPLICATION

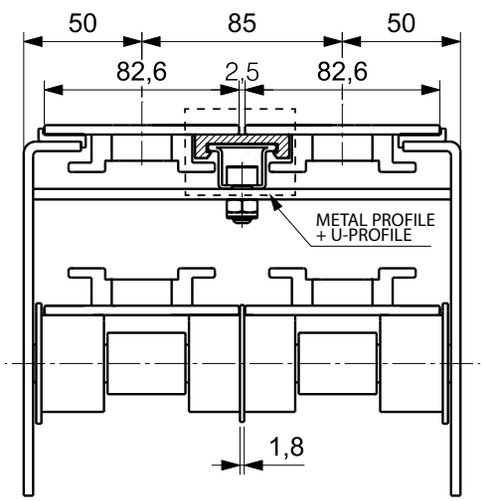


MATERIAL METAL PROFILE	MATERIAL U-PROFILE	PART NUMBER	LENGHT	STANDARD PACKAGING	WEIGHT
Austenitic stainless steel	- *(metal profile only)*	**CC000318**	3 M BARS	18 M	0,94 kg/m
		CC000319	6 M BARS *(On request)*	18 M	
Austenitic stainless steel	UHMWPE	**CC000322**	3 M BARS	18 M	1,15 kg/m
		CC000323	6 M BARS *(On request)*	18 M	
	NEW e-SLIDE	**CC000324**	3 M BARS	18 M	
		CC000325	6 M BARS *(On request)*	18 M	

NOTE: Metal profile and U-PROFILE are supplied assembled

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

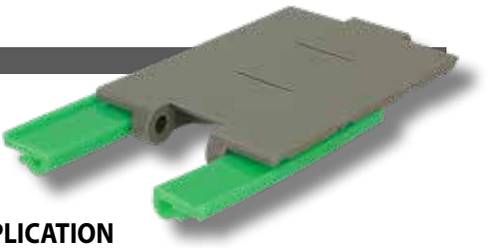


UR-PROFILE

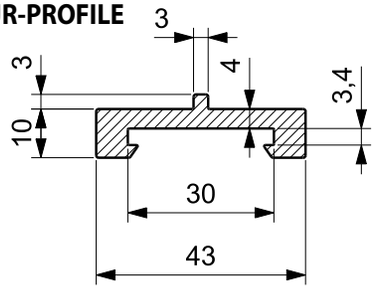


MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS024GS**	3 M BARS
	WS024GL	6 M BARS

APPLICATION

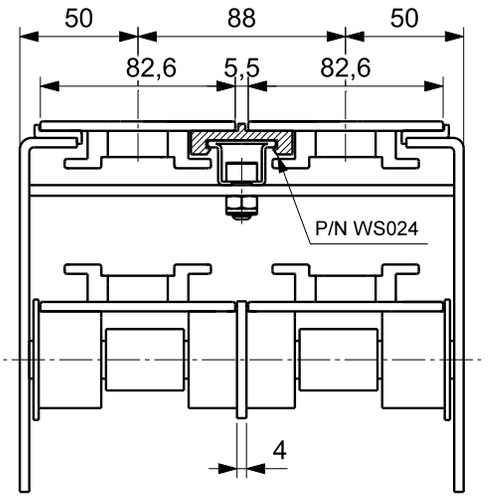


U-PROFILE

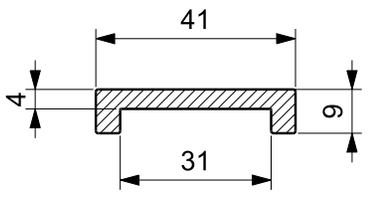


MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS006GS**	3 M BARS
	WS006GL	6 M BARS
NEW e-SLIDE	**WS006ES**	3 M BARS
	WS006EL	6 M BARS

APPLICATION

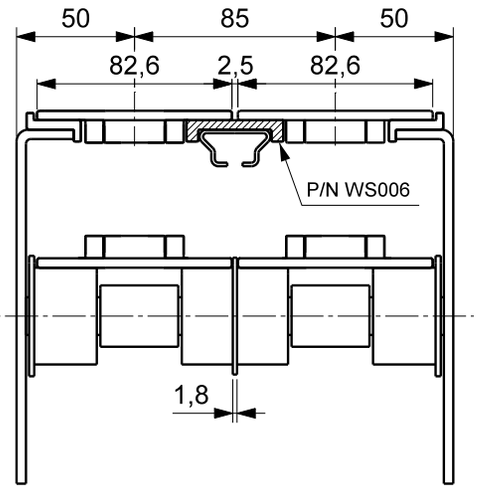


I-PROFILE



MATERIAL	PART NUMBER	STANDARD PACKAGING
UHMWPE	**WS021GC**	60 M COILS

APPLICATION

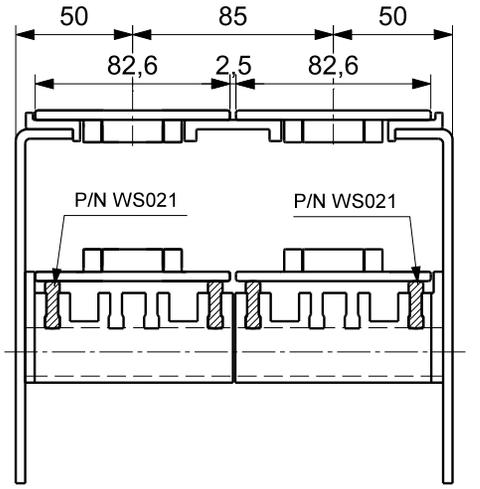


Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved




The side guides provides low friction and smooth consistent contact with the products for the maximum sability.
It is ideal for PET or glass bottles, also where label protection is critical.
The side guides are supplied without clamp.
It can be ordered using the P/N CC000307.


LABEL PROTECTION PROFILE

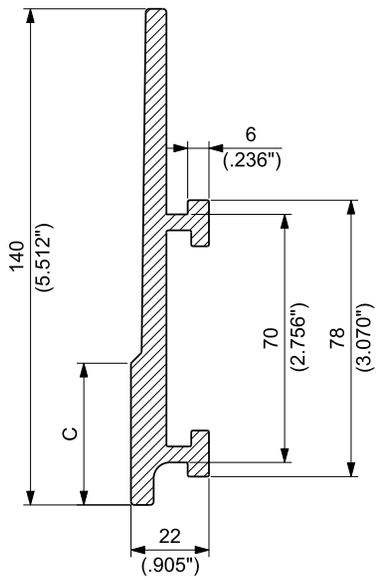

STAINLESS STEEL CLAMP

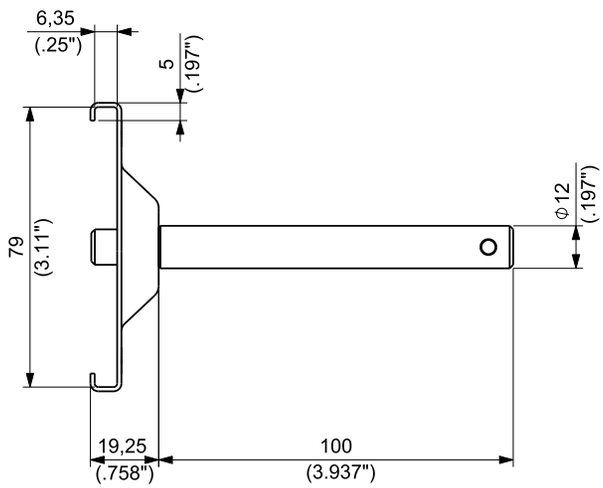

ASSEMBLY EXAMPLE

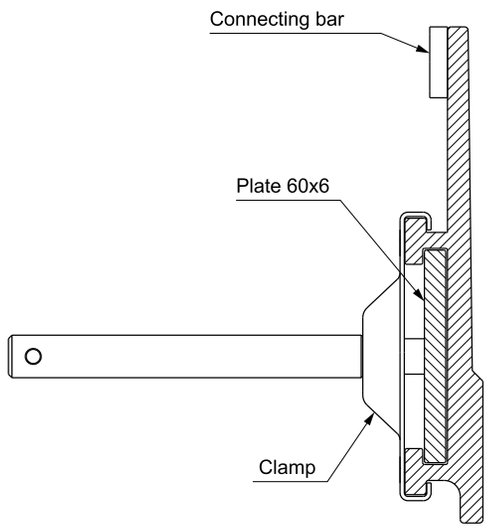

PART NUMBER **CC000307**

Standard packaging:
30 pieces

MATERIAL	VERSION	PART NUMBER	C mm	C inch	FOR PLATE mm	STANDARD PACKAGING
HDPE	NO LABEL PROTECTION	**CC000300**	-	-	60x6	3 M BARS
	WITH LABEL PROTECTION	**CC000303**	5	0.197		
		CC000301	20	0.787		
		CC000302	40	1.575		

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

NOTE

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

NOTE

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

NOTE

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

NOTE

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved

PERFORMANCE IN MOTION

ITALY

REGINA CATENE CALIBRATE S.p.A.
HEAD OFFICE:
Via Monza, 90
23870 Cernusco Lombardone (LC) - Italy
Tel. +39 039 99801
Fax +39 039 9905229
sales@reginachain.net

USA

REGINA USA, INC.
305 E. Mahn Court
Oak Creek, WI 53154 - USA
Tel. 001 414 5710032
Fax 001 414 5710225
sales.us@reginachain.net

FRANCE

REGINA INDUSTRIE s.a.r.l.
Z.A.C. des Chatelliers
34 Rue des Frères Lumière
45800 Saint Jean De Braye - France
Tel. +33 238 836363
Fax +33 238 836413
sales.fr@reginachain.net

MEXICO

REGINA de MEXICO S.A. de C.V.
Av. Aviación 5051-28
Col. San Juan de Ocotan
45019 Zapopan, Jalisco – Mexico
Tel. +52 33 3627 4043
Fax +52 33 3627 3930
sales.mx@reginachain.net

CHINA

REGINA TIANJIN CHAIN & BELT CO., LTD.
Xi Qing Economic Development Area,
Xiang Rui Road n. 17
Tian Xiang Industrial Zone
300385 Tian Jin - China
Tel. +86 22 83961223
Fax +86 22 83961202
sales.cn@reginachain.net

UNITED KINGDOM

REGINA INTERNATIONAL LIMITED
Unit 1, Dyneley Road,
Greenbank Business Park
Whitebirk, Blackburn,
Lancs BB1 3AB - United Kingdom
Tel. +44 1254 661116
Fax +44 1254 59456
sales.uk@reginachain.net

ARGENTINA

REGINA INTERNATIONAL S.A.
Parque Industrial PIBA II- UF 35
Martin de Gainza 1802 (B1736JTR),Trujui,
Partido de Moreno, Buenos Aires – Argentina
Tel. +54 11 1541411753
sales.ar@reginachain.net

GERMANY

REGINA CATENE CALIBRATE S.p.A.
BRANCH
Giselherstrasse 56
44319 - Dortmund - Germany
Tel. +49 231 95983001
sales.de@reginachain.net

SPAIN

CADENAS REGINA ESPAÑA, S.L.
Calle Industria, 37
08120 La Llagosta - Barcelona - España
Tel. +34 93 5742838
Fax +34 93 5740735
sales.es@reginachain.net

THE NETHERLANDS

SALES OFFICE
Tel. +31 610681114
sales.nl@reginachain.net

INDIA

SALES OFFICE
Tel. +91 9657009001
sales.in@reginachain.net



www.reginachain.net

V/CAT724e

Copyright Regina Catene Calibrate s.p.a. - 2024, All rights reserved